

Cassava Chip Drying by Using a Small-Scale Hot-Air Microwave Oven

Patomsok Wilaipon

Department of Mechanical Engineering, Naresuan University, Phitsanulok, Thailand

Received 2013-05-24, Revised 2013-06-04; Accepted 2013-06-06

ABSTRACT

Characteristics of cassava microwave hot-air drying were investigated in a 2-planes microwave hot-air dryer. The drying experiments were carried out at two levels of sample surface temperature set-points viz. 70 and 80°C respectively. Cassava (Rayong-9) with 2.5 kg weight and 61% moisture content on wet basis was dried in the dryer for about 5-5.3 h. It was found that the drying time decreased with an increase in sample-surface temperature set point. Approximately 89% of the moisture was removed during the drying period. The rapid decrease in moisture ratio values followed by the gradual decline period was found in all experiments. With regard to drying kinetics, 5 commonly used mathematical models were examined with the experimental data. It was found that Page's and diffusion models provided a good agreement between the experimental and predicted moisture ratio values. The regression results indicated that high values of coefficient of determination and adjusted coefficient of determination as well as low value of standard error of estimation were reported for the case of these two models.

Keywords: Cassava Drying, Microwave, Drying

1. INTRODUCTION

Thermal drying may be defined as the process of thermally removing moisture to yield a solid product. Two processes simultaneously take place during thermal drying viz. the evaporation of surface moisture and the internal moisture transferring. The energy from the surrounding environment, as a result of convection, conduction, radiation, or the combination of these effects, is transferred to the drying product to evaporate the surface moisture. In addition, the movement of internal moisture to the surface of the drying product may occur through several mechanisms such as diffusion, capillary effect as well as an increase in internal pressure of the material.

According to the conventional hot-air dryer, several kinds of materials have been investigated with regard to their drying characteristics. Properties of dried poultry manure including its kinetics of thin layer drying, ranging from 1-3 cm, were studied by two researchers from Canada (Ghaly and Macdonald, 2012a; 2012b). In addition, some examples of fruits/vegetables drying characteristics

namely Borneo Canary Odontophyllum, tomato and lemon grass were also investigated (Basri *et al.*, 2012; Brooks *et al.*, 2008; Ibrahim *et al.*, 2009).

One type of hot-air dryers for granular materials is the fluidized bed dryer, where the material is dried while suspended in the upward-flowing hot gas. Chili drying characteristics by using a continuous fluidized bed dryer, the kinetics of chili including the mathematical model of chili drying using a rotating fluidized bed technique were investigated by researchers from Thailand (Charmongkolpradit *et al.*, 2010; Dongbang *et al.*, 2010; Triratanasirichai *et al.*, 2011). On the contrary to the hot-air drying technique, freeze dried method offers the advantage of little loss of flavor and aroma. The moisture in the material is sublimated from the frozen material as a vapor in a vacuum chamber. Lime juice powder obtained from the vacuum freeze drying technique was an example of the researches (Theansuwan *et al.*, 2008).

Another promising technique is microwave drying method, which is considerably different from the conventional drying. The electromagnetic field in microwave drying interacts with the drying material as a

whole while the hot-air drying depends on the rate of heat propagation from higher-temperature material surface to the inside. Ozkan *et al.* (2007) investigated the drying characteristics of spinach using 8 microwave power levels. It was found that the drying process was completed between 290 to 4005 s depending on the value of microwave power. Microwave drying in combination with hot air drying was also used for pumpkin slices drying (Alibas, 2007). Drying periods for the case of microwave, hot air and combined microwave-air drying methods were studied. It was reported that the latter was accounted for the shortest drying period.

The aim of this study was to evaluate the drying characteristics of combined microwave-air method for the case of cassava. Furthermore, the mathematical model parameters were also calculated by using regression technique.

2. MATERIALS AND METHODS

2.1. Material

Rayong-9 cassavas with an initial moisture content of 61% on wet basis were obtained from a local factory in Phitsanulok, Thailand. Their initial moisture content value was examined, according to ASAE S358.2 DEC99 standard, by using a cabinet hot-air dryer (Memmert 600, 30-350°C, 2400 W) and a digital balance (accuracy 0.001 g). Then, the material was cut into 10 mm thick and 25-50 mm diameter with the cutting machine. All cassavas used in the experiment were from the same batch.

2.2. Drying Experiment

The drying system was comprised of two 86×43 mm rectangular waveguides, two air-cooled magnetrons and a 44×51×93 cm cavity. Two 800W-magnetrons used in the experiments work at the frequency of 2.45 GHz. They were installed in the waveguides mounted on the top and the left of the cavity. Four heaters, 2 kW each, were installed at the air inlet duct. A temperature controller (Shimax MAC5D) and type K thermocouple were utilized for temperature control purpose. In order to record the sample weight loss, a 15 kg single-point load-cell coupled to a load cell indicator (Primus CM 013) was installed on the top of the cavity. Additionally, A Testo 435, accuracy ±0.25°C and ±2% RH, was used for measuring the temperature and relative humidity of inlet air.

In all experiments, approximately 2.5 kg of samples were used. The samples were uniformly spread on a drying tray and placed in the drying cavity. The temperature and velocity of hot air were set at 60°C and

1 m sec⁻¹ respectively. A temperature sensor was utilized for measuring surface temperature of the sample. It was used as an input for microwave power operation control. The experiments were investigated at two levels of sample temperature viz 70 and 80°C respectively.

2.3. Data Analysis

The values of moisture ratio were calculated using the following Equation 1:

$$MR = (M_t - M_e) / (M_i - M_e) \quad (1)$$

Where:

MR = The moisture ratio

M_t = The moisture content at t h (%)

M_e = The equilibrium moisture content (%)

M_i = The initial moisture content (%)

Several conventional drying models have been proposed for determining the moisture ratio as a function of drying time. In this research, the drying models of cassava drying by using 2 planes magnetron microwave-air drying system were investigated. Newton model (Equation 2), Page's model (Equation 3), logarithmic model (Equation 4), Henderson&Pabis model (Equation 5) and diffusion model (Equation 6) were applied to describe the characteristics of cassava drying:

$$MR = \exp(-kt) \quad (2)$$

$$MR = \exp(-kt^n) \quad (3)$$

$$MR = (a) \exp(-kt) + b \quad (4)$$

$$MR = (a) \exp(-kt) \quad (5)$$

$$MR = (a) \exp(-kt) (1 - a) \exp(-ktb) \quad (6)$$

Where:

K = The drying constant

N = The power parameter

a and b = Parameters

t = Drying time (hour)

Coefficient of determination (R²), adjusted coefficient of determination (R²_{adjusted}) and Standard Error of Estimation (SEE) were utilized to evaluate the goodness of fit of the tested drying models to the experimental data.

3. RESULTS AND DISCUSSION

Effective mathematical model of drying characteristic is crucial for cassava microwave-air drying kinetics investigation. The combination of microwave and hot-air energy was able to reduce the sample moisture content from 61 to 14% in 5-5.3 h depending on the levels of sample temperature set point. It was found that as the set-point temperature increased, the drying time was decreased. By using non-linear regression technique, the drying constants and coefficients of the five models obtained are shown in **Table 1**.

In order to evaluate goodness of fit, coefficient of determination (R^2), adjusted coefficient of determination ($R^2_{adjusted}$) and Standard Error of Estimation (SEE) were also computed. The goodness of fit was determined by

the higher R^2 and $R^2_{adjusted}$ values as well as the lower SEE values. For all cases, it was found that R^2 and $R^2_{adjusted}$ values were higher than 0.98 and SEE values were lower than 3.1×10^{-2} .

Furthermore, it was found that diffusion and Page's models gave the excellent fit results for all the experimental data. For the case of diffusion model regression, the values of R^2 , $R^2_{adjusted}$ and SEE for 70-80°C set-point temperature were 0.9967-0.9989, 0.9962-0.9988 and 0.0101-0.0172 respectively. With regard to Page's model, the values of these three criteria were found to be 0.9957-0.9989, 0.9954-0.9988 and 0.0101-0.0189 respectively. Normal probability plots of residuals of these models are shown in **Fig. 1-4**.

Table 1. The drying constants and parameters of five drying models

Model	The drying constants and coefficients			
	k	a	b	n
Newton				
80°C	0.65787			
70°C	0.59300			
Page's				
80°C	0.71960			0.85372
70°C	0.60304			0.97644
Logarithmic				
80°C	0.73956	0.93514	0.04841	
70°C	0.58319	0.99553	-0.00345	
Henderson and Pabis				
80°C	0.62955	0.96000		
70°C	0.58903	0.99347		
Diffusion				
80°C	0.49012	0.69691	3.53314	
70°C	2.40151	0.03765	0.23877	

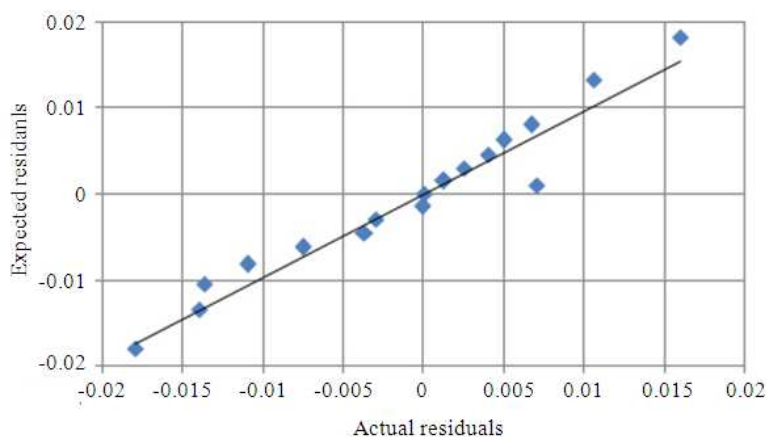


Fig. 1. Normal probability plot of residual of diffusion model for the case of 70°C

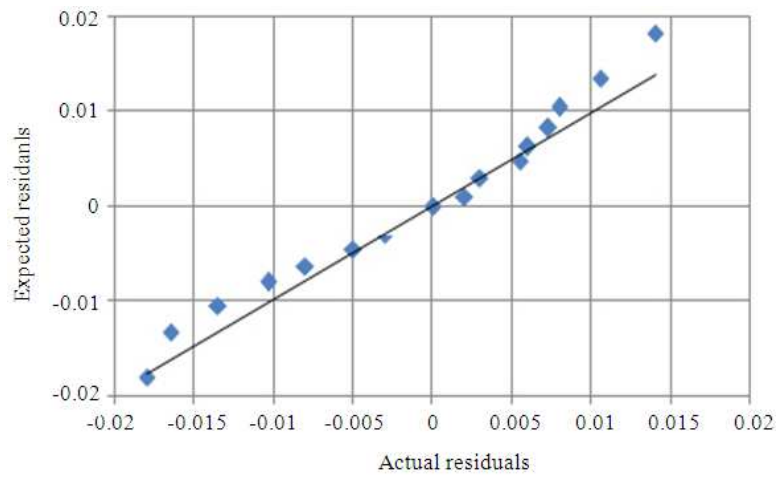


Fig. 2. Normal probability plot of residual of diffusion model for the case of 80°C

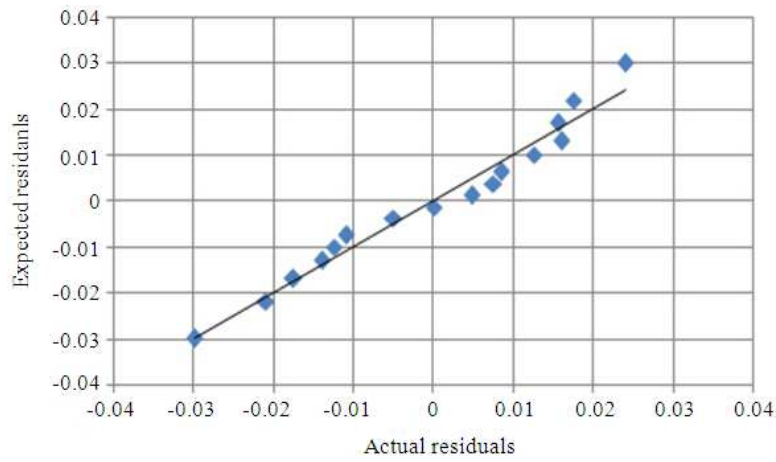


Fig. 3. Normal probability plot of residual of page's model for the case of 70°C

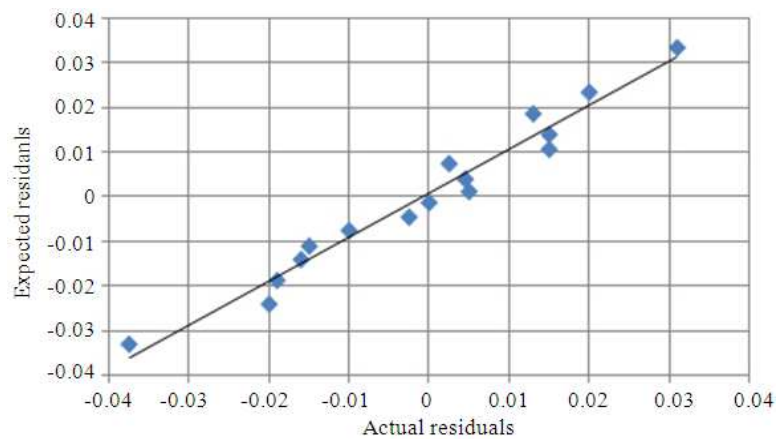


Fig. 4. Normal probability plot of residual of page's model for the case of 80°C

4. CONCLUSION

Drying kinetic of cassava in a 2-planes microwave hot-air oven was investigated. Drying time decreased with an increase in sample-surface temperature set point. Approximately 89% of the moisture was removed from the sample during the 5-5.3 h drying-period. The rapid decrease in moisture ratio values followed by the gradual decline period was found in all experiments. With regard to 5 drying model applied to describe the drying kinetic of the sample, it was found that diffusion and Page's models provided a good agreement between the experimental and predicted moisture ratio values. High values of coefficient of determination and adjusted coefficient of determination as well as low value of standard error of estimation were also reported for the case of these two models.

5. ACKNOWLEDGEMENT

The author gratefully acknowledges Naresuan University for the financial support and Energy for Environment Research Unit for the research equipment.

6. REFERENCES

- Alibas, I., 2007. Microwave, air and combined microwave-air-drying parameters of pumpkin slices. *Food Sci. Technol.*, 40: 1445-1451. DOI: 10.1016/j.lwt.2006.09.002
- Basri, D.F., A. Fudholi and M.H. Rusian, 2012. Drying characteristics of the Borneo *Canarium Odontophyllum* (Dabai) fruit. *Am. J. Agric. Biol. Sci.*, 7: 347-356. DOI: 10.3844/ajabssp.2012.347.356
- Brooks, M.S., N.H.A. EI-Hana and A.E. Ghaly, 2008. Effects of tomato geometries and air temperature on the drying behavior of plum tomato. *Am. J. Applied Sci.*, 5: 1369-1375. DOI: 10.3844/ajassp.2008.1369.1375
- Charmongkolpradit, S., K. Triratanasirichai and N. Srihajong, 2010. Drying characteristics of chili using continuous fluidized-bed dryer. *Am. J. Applied Sci.*, 7: 1300-1304. DOI: 10.3844/ajassp.2010.1300.1304
- Dongbang, W., W. Pirompugd and K. Triratanasirichai, 2010. The drying kinetics of chilies using a rotating fluidized bed technique. *Am. J. Applied Sci.*, 7: 1599-1606. DOI: 10.3844/ajassp.2010.1599.1606
- Ghaly, A.E. and K.N. MacDonald, 2012a. Drying of poultry manure for use as animal feed. *Am. J. Agric. Biol. Sci.*, 7: 239-254. DOI: 10.3844/ajabssp.2012.239.254
- Ghaly, A.E. and K.N. MacDonald, 2012b. Kinetics of thin layer drying of poultry manure. *Am. J. Agric. Biol. Sci.*, 8: 128-142. DOI: 10.3844/ajbbsp.2012.128.142
- Ibrahim, M., K. Sopian and W.R.W. Daud, 2009. Study of the drying kinetics of lemon grass. *Am. J. Applied Sci.*, 6: 1070-1075. DOI: 10.3844/ajassp.2009.1070.1075
- Ozkan, I.A., B. Akbudak and N. Akbudak, 2007. Microwave drying characteristics of spinach. *J. Food Eng.*, 78: 577-583. DOI: 10.1016/j.jfoodeng.2005.10.026
- Theansuwan, W., K. Triratanasirichai and K. Tangchaichit, 2008. Continuous production of lime juice by vacuum freeze drying. *Am. J. Applied Sci.*, 5: 959-962. DOI: 10.3844/ajassp.2008.959.962
- Triratanasirichai, K., W. Dongbang and W. Pirompugd, 2011. Mathematical modeling of drying characteristics of chilies in a rotating fluidized bed technique. *Am. J. Applied Sci.*, 8: 979-983. DOI: 10.3844/ajassp.2011.979.983