

Transfer Function-Noise Modeling of the Dynamic Relationship between Botswana's Monthly Maximum Temperature and Evaporation

¹Oliver Moses, ²Edward Lungu and ³Bhagabat Prasad Parida

¹Okavango Research Institute, University of Botswana, Maun, Botswana

²Department of Mathematics and Computational Sciences, Botswana International University of Science and Technology, Palapye, Botswana

³Department of Civil Engineering, University of Botswana, Gaborone, Botswana

Article history

Received: 14-04-2016

Revised: 13-01-2017

Accepted: 18-03-2017

Corresponding Author:

Oliver Moses

Okavango Research Institute,
University of Botswana, Maun,
Botswana

Tell: +267 6817203

Fax: +267 6861835

Email: omoses@ori.ub.bw

Abstract: In Botswana, the rate of evaporation over open water surfaces is high because the country is characterised by hot and semi arid climatic conditions. The purpose of the study is to investigate the correlation between Botswana's monthly maximum temperature and evaporation and between monthly maximum wind speed and evaporation, for the stations Gaborone, Francistown and Maun and to fit transfer function-noise models between the highly correlated elements. The data were obtained from the Botswana Department of Meteorological Services. Cross correlation analysis revealed that for the selected weather stations, monthly maximum evaporation is much more strongly correlated to monthly maximum temperature than to monthly maximum wind speed. Monthly maximum temperature and evaporation were modelled with transfer function-noise models. The results of the study are crucial mainly to those in water management, agriculture and other similar industries.

Keywords: Botswana, Monthly Maximum Evaporation, Monthly Maximum Temperature, Transfer Function-Noise Models

Introduction

An unending circulation of water within the atmosphere starts with large quantities of water evaporating from water bodies (Ahrens, 1994). Evaporation depends on several factors, which include meteorological variables (Xu and Singh, 1998). Evaporation and the meteorological variables that affect it are of interest to various applications such as in water resources management, agriculture and climatology. Evaporation from waterbodies accounts for most of the moisture in the atmosphere ($\approx 90\%$), while the remaining 10% is accounted for by transpiration and sublimation (Moran and Morgan, 1986; Ahrens, 1994; AMPJ, 2016). The contribution from transpiration is far greater than that from sublimation. Injection of moisture into the atmosphere is necessary for precipitation formation. Precipitation is the main way by which water is transferred from the atmosphere back to the surface of the earth. In regions

with little rainfall, evaporation losses contribute considerably to the decrease of water levels in water bodies such as dams (Kumar *et al.*, 2013).

Since meteorological variables influence evaporation, it is crucial to study dynamic relationships between these variables and evaporation. Dynamic relationships can be studied using Transfer Function-Noise Models (TFNMs). These models have been successfully employed in studying dynamic relationships between climatic and hydrological variables (Box and Jenkins, 1970; 1976; Lungu, 1991; Lungu and Sefe, 1991; Box *et al.*, 1994; Jain and Lungu, 2003; Manzione *et al.*, 2010). When long series are used as input for TFNMs, output series of extensive length can be simulated (Manzione *et al.*, 2010). The success in the application of these models in the past has motivated their application in this study. In this paper, these models are employed to study the dynamic relationships between evaporation and meteorological variables in Botswana, using data from the Botswana Department of Meteorological Services.

The data are for the stations Maun, Francistown and Gaborone. For this technique, it is crucial to select only input variables that have the strongest influence on evaporation for the constructed models to be simple enough to be understood (Condorena and da Costa, 2011). Literature reveals that there are four main meteorological parameters that affect evaporation, namely, solar radiation, wind speed, relative humidity and air temperature (Singh, 1992; Kumar *et al.*, 2013). Based on the selection criteria of the input variables for the adopted technique and on what literature reveals about meteorological parameters in relation to evaporation, this study does not consider precipitation as one of the main meteorological parameters that affect evaporation. However, other authors have studied relationships between rainfall and extreme temperatures in Botswana (Lungu *et al.*, 2003) and between temperature and rainfall variability in South Africa (Nkuna and Odiyo, 2016). The present study found that out of the four main meteorological elements that affect evaporation, only air temperature and wind speed had reliable data. This study therefore investigates the correlation between Botswana's monthly maximum evaporation and temperature and between monthly maximum evaporation and wind speed and fits TFNMs between the strongly correlated climatic elements (Box and Jenkins, 1970; 1976; Box *et al.*, 1994; Huang and Wu, 2014; Yu *et al.*, 2014; Deng *et al.*, 2015; Park and Koo, 2015). Fitting of TFNMs between the stated climatic elements has never been done in Botswana; hence this study fills this gap.

It has been pointed out above that evaporation losses contribute significantly to the decrease of water levels in water resources. The water resources that are highly affected by evaporation and are of interest in this study are the country's Okavango Delta and some major dams which include Shashe, Letsibogo, Gaborone and Bokaa. These water resources provide fresh water to the nation. In addition, the Okavango Delta is one of the country's main tourist attractions. It is also a Ramsar and a World Heritage Site. The models constructed in this study can be used to predict the output series (evaporation) with a lead time of a few months, which will be valuable information, mainly to those responsible for the management of the limited water resources in Botswana, agriculture and other related works (Manziona *et al.*, 2010; Kenabatho *et al.*, 2015).

Materials and Methods

The Study Area

The study area is Botswana, which is a landlocked country (Fig. 1). It lies between latitudes 17 and 27°S and between longitudes 20 and 29°E. Drought is

common and rainfall is highly variable in terms of both space and time. Rainfall occurs mainly during the period October to March. Annual mean rainfall ranges between a maximum of 650 mm in the north (Kasane) and a minimum of about 250 mm in the southwest (Bhalotra, 1984; 1987). Mean monthly maximum temperatures range between 32 and 35°C in the northern half of the country in October and January, while mean monthly minimum temperatures range between 2 and 7°C in July in the southwest (Bhalotra, 1984; 1987). Wind speeds have a low annual mean, which is about 11 km h⁻¹ (Larsson, 1986), but daily maximum values can exceed 75 km h⁻¹. Botswana's climate can be summarised as hot and semi arid to arid (Pike, 1971; Bhalotra, 1984; 1987; Moses, 2007). The country's weather conditions are influenced by synoptic scale weather systems such as the Atlantic Ocean high pressure cell, Indian Ocean high pressure cell, cut-off lows, frontal systems, surface lows, high pressure cells, Inter Tropical Convergence Zone (ITCZ) and westerly and easterly troughs (Moses and Parida, 2016).

The study area is represented by three meteorological stations located in three areas of national significance, which are Francistown, Maun and Gaborone. Maun is situated in the Okavango Delta (northwestern part of the country). The Delta is a source of fresh water, supports livelihoods and ecological functions in the northwestern region. It receives most of its water from Angolan high lands, but it loses approximately 98% of its water through evapotranspiration (USAID, 2013). Moreover, the Delta is a tourist site of high economic value. Tourism is the country's second largest economic sector after mining. Gaborone and Francistown are also areas of national significance since they are the country's first and second largest cities respectively. Dams shown in Fig. 1, which include Shashe and Letsibogo (near Francistown), Gaborone and Bokaa (Gaborone), have been constructed to supply these cities with fresh water. Evaporation from these water resources has persistently been a major problem, which limits their optimal performance (SMEC, 1987; Moses, 2007).

Data

Monthly maximum Temperature (MT), monthly Maximum Evaporation (ME) and monthly Maximum Wind speed (MW) observational data for the selected stations were provided by the Botswana Department of Meteorological Services. The geographical positions of these stations, their data types and periods are given in Table 1. The stations started their operations in the 1960's. Only the data periods indicated in the table had quality data. Periods later than those indicated in the table had huge data gaps and were therefore not considered in the analysis.

Table 1. Meteorological stations used in the study. Lat, Lon, MT, MW and ME stand for latitude, longitude, monthly maximum temperature, monthly maximum wind speed and monthly maximum evaporation respectively

Station name	Lat (⁰ S)	Lon (⁰ E)	Data used	Start data period	End data period
Gaborone	24.6	25.9	MT, MW, ME	1962	1993
Francistown	21.2	27.5	MT, MW, ME	1960	1993
Maun	20.0	23.4	MT, MW, ME	1965	1990

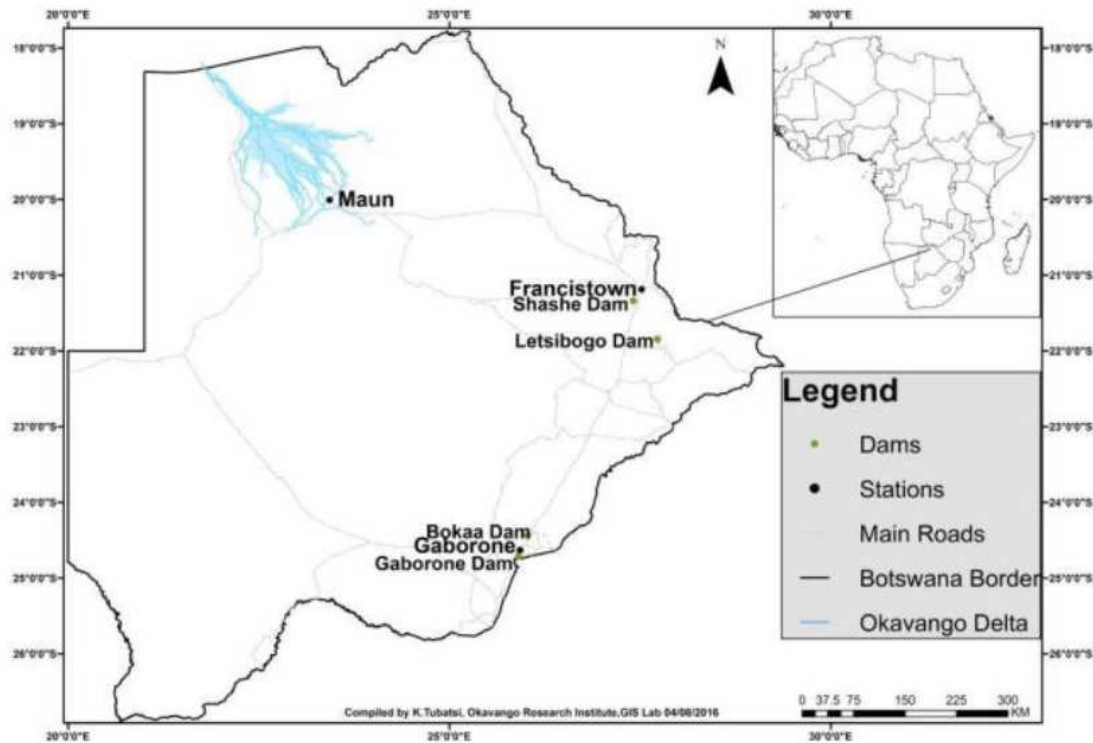


Fig. 1. Location of the selected meteorological stations, dams and the Okavango Delta

Transfer Function-Noise Models

TFNMs were employed in the study of the dynamic relationships between evaporation and meteorological elements that affect it. They were fitted to the highly correlated climatic elements, i.e., they were fitted either between MT and ME, or between MW and ME. Cross correlations, discussed in the sub section below, were used to determine the strengths of the correlation coefficients and to identify the TFNMs. To represent these models with an equation, suppose that pairs of observations (X_t, Y_t) are available at equispaced intervals of time and that X measures the level of an input to a system and that the level of X influences the level of a system output Y . When X is changed from one level to another, it has no immediate effect on the output, but produces a delayed response with Y eventually coming to equilibrium at a new level. Such a change is called a dynamic response, which is described by transfer

function models. These models can be expressed as (Box and Jenkins, 1970; 1976; Jenkins, 1979; Box *et al.*, 1994; Huang and Wu, 2014; Park and Koo, 2015):

$$\delta_r(B)Y_t = \omega_s(B)X_{t-b} \quad (1)$$

where, the operators $\delta_r(B)$ and $\omega_s(B)$ are polynomials of orders (r, s), which are expressed respectively as:

$$\delta_r(B) = 1 - \delta_1 B - \dots - \delta_r B^r \quad (2a)$$

$$\omega_s(B) = \omega_0 - \omega_1 B - \omega_2 B^2 - \dots - \omega_s B^s \quad (2b)$$

where, B is the backward shift operator, X_t is a measure of the level of an input to a system which influences the level of a system output Y_t , b is the delay parameter representing the number of complete time intervals before a change in X_t begins to have an effect on Y_t .

For stability, the roots of the characteristic equation $\delta_r(B) = 0$, with B regarded as a variable, must lie outside the unit circle. Equation 1 is of order (r,s,b) . The order of this equation is identified from the data during the data based identification process (Romanowicz *et al.*, 2010). The orders of r and s range from 0 to 2 (Box and Jenkins, 1970). In the real world, there are other influences that affect Y other than X , whose net effect is to corrupt the output predicted by the transfer function model. These other influences on Y , which also need to be accounted for by TFNMs, are called disturbances or noise. For a series that has been differenced (which removes trends and seasonality) to attain stationarity, TFNMs have the form (Box and Jenkins, 1970; 1976; Jenkins, 1979; Box *et al.*, 1994):

$$Y_t = \delta_r^{-1}(B)\omega_s(B)x_{t-b} + n_t \quad (3a)$$

With:

$$n_t = \nabla^d \phi^{-1}(B)\theta(B)a_t \quad (3b)$$

where, n_t is the net effect of the noise which corrupts the system at the output, $yt = \nabla^d Y_t$ and $x_t = \nabla^d X_t$ are stationary processes with zero means, a_t is the uncorrelated random variable, d is the order of non-seasonal differencing necessary to make the series stationary, $\nabla = (1-B)$ is the backward differencing operator, $\phi(B)$ is the autoregressive operator, $\theta(B)$ is the moving average operator.

Identification of TFNMs was simplified by pre-whitening the input of the system. As the number one step of the identification process, the pre-whitening procedure of Box and Jenkins (1970) involves fitting an Autoregressive Moving Average (ARMA) model to the differenced input series (Box and Jenkins, 1970; 1976; Lungu, 1991; Lungu and Sefe, 1991; Box *et al.*, 1994; Bierkens and Knotters, 1999; Jain and Lungu, 2003; Lungu *et al.*, 2003; Huang and Wu, 2014; Kenabatho *et al.*, 2015; Park and Koo, 2015). The 95% confidence limits of the autocorrelation and partial autocorrelations functions were approximated by $\pm 2/n^{1/2}$ (Harvey, 1993; Diggle and Chetwynd, 2011). An ARMA model has the form (Box and Jenkins, 1970; 1976; Box *et al.*, 1994):

$$\phi(B)x_t = \theta(B)\alpha_t \quad (4a)$$

or when rearranged:

$$\alpha_t = \theta^{-1}(B)\phi(B)x_t \quad (4b)$$

where, α_t is the uncorrelated input series.

The rearranged ARMA model (Equation 4b) shows that the correlated input series x_t is transformed to the uncorrelated white noise series α_t by the transformation $\phi(B)\theta^{-1}(B)$. The advantage of using the differencing method to attain stationarity is that if the same order of differencing is applied to both the input and the output series, the resulting transfer functions between the differenced series are identical to those between the original series. Assuming that the transformation applied to the input series x_t can be applied to the differenced output series y_t , yields:

$$\beta_t = \phi(B)\theta^{-1}(B)y_t \quad (5)$$

where, β_t is the uncorrelated output series.

The ARMA model represented by Equation 4a is a special case of the general multiplicative Autoregressive Integrated Moving Average (ARIMA) models, of order $(p,d,q)x(P,D,Q)s$, that account for both the non-seasonal and seasonal dependencies in the time series. These models have the general form (Box and Jenkins, 1970; 1976; Box *et al.*, 1994; Huang and Wu, 2014; Kenabatho *et al.*, 2015; Park and Koo, 2015):

$$\Phi_p(B_s)\phi_p(B)\nabla_s^D\nabla^d z_t = \Theta_Q(B^s)\theta_q(B)a_t \quad (6)$$

where, $\phi_p(B)$ is the autoregressive operator of order p , $\theta_q(B)$ is the moving average operator of order q , D is the degree of seasonal differencing, s is the periodicity, $\nabla_s = (1-B^s)$ is the simplifying operator, $\Phi_p(B^s)$ is the seasonal autoregressive operator of order P , $\Theta_Q(B^s)$ is the seasonal moving average operator of order Q , z_t is the series of observations.

Cross Correlations

Cross correlations at lag zero, which are a measure of the average correlations (Rummel, 1976), were used to determine the strengths of the relationships between the dependent and the independent time series, i.e., between the differenced series of MT and ME and between MW and ME. As mentioned above, TFNMs were fitted between the strongly correlated climatic elements. Cross correlations at various lags were used in the identification of the models, i.e., the orders (r,s,b) of the operators $\delta_r(B)$ and $\omega_s(B)$ in

Equation 1, 2a and 2b and were also used to estimate the parameters of these operators. The advantage of cross correlations is that they can characterise lagged relationships between two series (LC, 2016) and can also discern relationships between variables that may possibly be difficult to discern because of strong trends in the data (Nkuna and Ndiyo, 2016). For the pre-whitened input series α_t (from Equation 4b) and the corresponding output series β_t (from Equation 5), the cross correlation between the two series at lag k , $r_{\alpha\beta}(k)$, is given by the equation (Chatfield, 2004; Montgomery *et al.*, 2008):

$$r_{\alpha\beta}(k) = \frac{(1/n) \sum_{i=1}^{n-k} (\alpha_i - \bar{\alpha})(\beta_i - \bar{\beta})}{\sigma_{\alpha}\sigma_{\beta}}, k = 0, 1, \dots, (n-1) \quad (7)$$

where, $\bar{\alpha}$ and $\bar{\beta}$ are the averages of the α_i and β_i series respectively, while σ_{α} and σ_{β} are their standard deviations, n is the length of the two series, i is the i^{th} value.

Considering one series as the input and the other series as the output from a dynamic linear system, the delayed response is computed through the impulse response function (LC, 2016). The cross correlation at lag k is directly proportional to the impulse response function $v'(k)$ and is expressed as (Box and Jenkins, 1970; 1976; Box *et al.*, 1994):

$$v'(k) = r_{\alpha\beta}(k) s_{\beta} / s_{\alpha} \quad (8)$$

where, s_{α}^2 and s_{β}^2 are estimates of the variances σ_{α}^2 and σ_{β}^2 , respectively.

Approximate standard error of $r_{\alpha\beta}(k)$ were estimated by:

$$\sigma'(r) = 1 / \sqrt{n-k} \quad (9)$$

Approximate standard errors provide a statistical check whether $r_{\alpha\beta}(k)$ is considerably different from zero (Pong-Wai, 1979).

Results and Discussion

Analysis of Mean Monthly Data

Mean monthly Maximum Temperature (mean MT), mean monthly maximum wind speed (mean MW) and mean monthly Maximum Evaporation (mean ME) were analysed to give an overview of their monthly variation. Variations of mean MT, mean ME and mean MW for Maun are shown in Fig. 2a-c respectively. Variations of mean monthly values of the other stations were similar to these figures. From Fig. 2a, it can be seen that mean MT vary from month to month, they are at their lowest in June and July and

they are at their highest in January and December. Fig. 2b shows that mean ME also vary from month to month in a similar manner as mean MT in Fig. 2a. Figure 2c reveals that the lowest values of mean MW are attained in February, while the highest values are attained in October.

Cross Correlation Coefficient Analysis

The estimated cross correlation coefficients at lag zero, between MT and ME series and between MW and ME series, are shown in Table 2. The coefficients between MT and ME for Gaborone, Francistown and Maun are 0.66, 0.60 and 0.58, respectively. In contrast, the coefficients between MW and ME for Gaborone, Francistown and Maun are much smaller, being 0.28, 0.12 and 0.14 respectively. The estimated confidence limits of the coefficients are ± 0.05 for Francistown and Gaborone and ± 0.06 for Maun. To make it easier to interpret the coefficients, the percentages of variance in common between MT and ME and between MW and ME were computed by squaring the coefficients and then multiplying them by 100 (Rummel, 1976). Consequently, the percentages of variance in common between MT and ME for Gaborone, Francistown and Maun are 44, 36 and 34%, respectively. On the other hand, the percentages of variance in common between MW and ME for Gaborone, Francistown and Maun are 8, 1 and 2% respectively. The high coefficients between MT and ME imply stronger correlations between the variables, while the low coefficients imply weaker correlations. In other words, on the basis of the estimated magnitudes of the coefficients, MT has a much greater influence on ME than MW. However, all the correlation coefficients are positive, indicating positive associations between the variables. TFNMs were fitted between the highly correlated MT and ME series. The coefficients between MT and ME and between MW and ME are higher for Gaborone than for the other two stations (Table 2). This could be attributed to drier conditions in Gaborone compared to the other two stations; hence Gaborone has higher evaporation rates. Maun and Francistown are closer to higher rainfall areas of Angola and Zambia, which have a positive influence on their surrounding air moisture level.

A study by Kumar *et al.* (2013), which estimated evaporation from climatic factors in India, found correlation coefficients of 0.7625 and 0.6612 between MT and ME and between MW and ME, respectively. Clearly these coefficients are higher than those found in this study and they indicate that MW has almost the same level of influence on ME as MT in India. This implies that the level of influence of meteorological factors on evaporation differs from region to region.

Table 2. Correlation coefficients of the data. MT, ME and MW stands for monthly maximum temperature, monthly maximum evaporation and monthly maximum wind speed respectively. Confidence limits for Francistown and Gaborone = ± 0.05 , for Maun = ± 0.06

Gaborone	MT	ME	MW
MT	1	0.66	-
ME	-	1	0.28
MW	-	-	1
Francistown	MT	ME	MW
MT	1	0.60	-
ME	-	1	0.12
MW	-	-	1
Maun	MT	ME	MW
MT	1	0.58	-
ME	-	1	0.14
MW	-	-	1

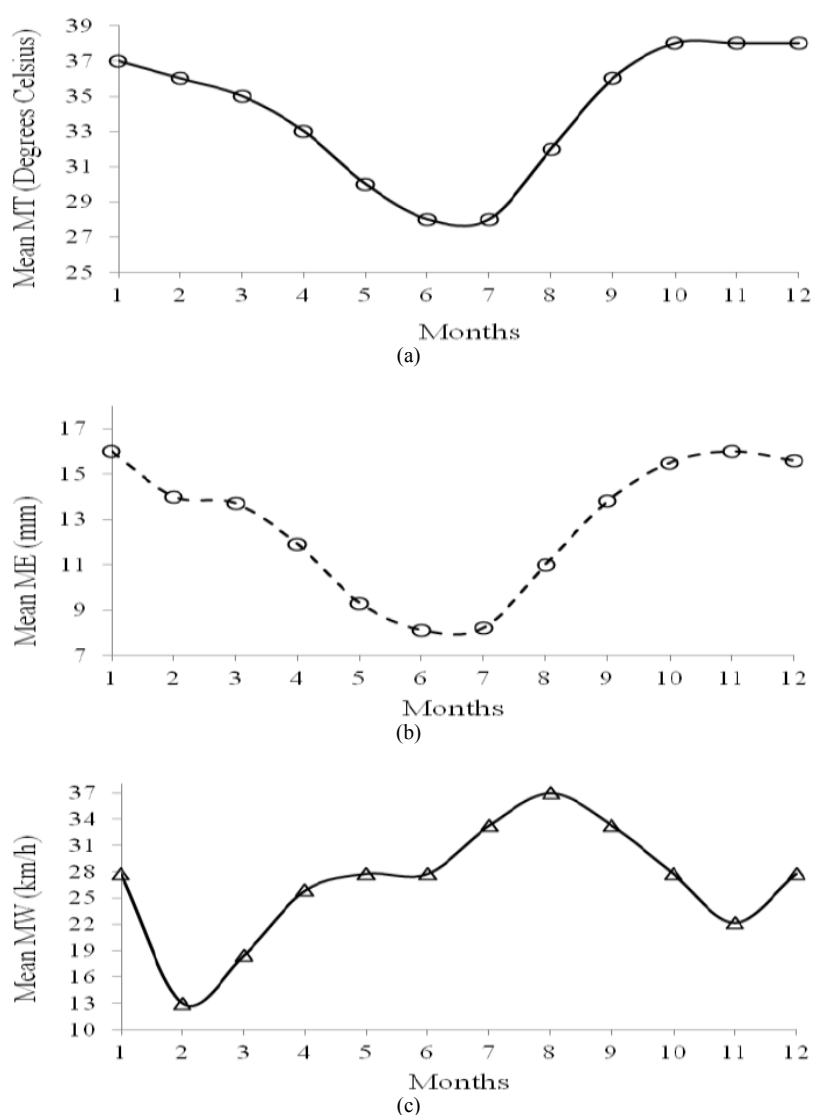


Fig. 2. Variation of Maun's (a) mean monthly Maximum Temperature (Mean MT), (b) mean monthly Maximum Evaporation (Mean ME) and (c) mean monthly Maximum Wind speed (Mean MW)

Prewhitening of the Series

In the prewhitening process, the MT series was taken as the input series, while the ME series was taken as the output series. The first step was to fit an ARMA model (Equation 4b) to the MT series using Autocorrelation Function (ACF) and Partial Autocorrelation Function (PACF). Figure 3 is a plot of the ACF and PACF for Francistown's MT series. The estimated 95% confidence limits of the ACF and PACF are ± 0.1 . ACFs and PACFs for the other stations' input and output series resembled Fig. 3. This figure shows that the series were made stationary by the order of differencing $d = 1$ and $D = 0$. Since the autocorrelation at lag 0 is always equal to 1 (Shaw, 1983; Box and Jenkins, 1970; 1976; Box *et al.*, 1994), the figure shows that only the autocorrelation at lag 1 is statistically significant since it shoots beyond the 95% confidence limits. This suggests that for the MT series, the suitable ARMA model (Equation 4b) can be well represented by a first order autoregressive model:

$$\alpha_t = (1 - \phi B)x_t \quad (10)$$

Comparing Equation 4b and 10 yields:

$$\theta^{-1}(B)\phi(B) = (1 - \phi B) \quad (11)$$

Equation 11 is the transformation that was found to be suitable for transforming the input MT series to the uncorrelated pure white noise series α_t , i.e., prewhitening the input series. In this equation, the estimated values of the autoregressive parameter ϕ that minimise $\Sigma \alpha_t^2$ are given in Table 3. By the assumption made in Equation 5, the transformation represented by Equation 11 was also applied to the output ME series to transform it to the uncorrelated white noise series β_t .

Cross Correlation Function Analysis

Cross Correlation Functions (CCFs) were used to identify the delay parameter b , the orders r and s of the operators $\delta_r(B)$ and $\omega_s(B)$ in Equation 1, 2a and 2b and were also used to estimate the parameters of these

operators. CCFs were between the uncorrelated α_t series (prewhitened MT series) and β_t series (prewhitened ME series). The variances s_α^2 and s_β^2 for the uncorrelated series α_t and β_t respectively, as well as approximate standard errors (Equation 9) of CCFs were computed and recorded in Table 3. CCFs for Francistown, Gaborone and Maun are plotted in Fig. 4a-c respectively. Figure 4a generally shows that the cross correlations smoothly decay towards zero with increasing lag. The cross correlation at lag 0 is the only one that is significantly greater than the approximate standard errors contained in Table 3. The cross correlations at lag 8 and 12 were considered as outliers, which were inevitable due to the fact that the same transformation that was used to transform the MT series was also used to transform the ME series. Francistown's CCF suggests that the delay parameter b in Equation 3a is equal to zero. The CCF for Gaborone (Fig. 4b) also, generally indicates that the cross correlations smoothly decay towards zero with increasing lag. The cross correlations at lag 0, 1 and 9 overshoot the approximated standard errors, but the cross correlations at lag 1 and 9 were treated as outliers as already discussed in the case of Fig. 4a. Hence the delay parameter b for Gaborone was also taken to be zero. For the same reasoning as in the cases of Fig. 4a and 4b, the cross correlation at lag 0 in Fig. 4c (Maun's CCF) was considered as the only statistically significant cross correlation. As a result, the delay parameter b for Maun was also taken to be zero. The delay parameter b being zero implies that for the data considered in the analysis, there is no period of delay for a change in temperature to have an effect on evaporation.

The determined orders (r,s,b) were $(1,1,0)$. This means that the parameters of the operators $\delta_r(B)$ and $\omega_s(B)$ were δ_1 , ω_0 and ω_1 . These parameters were estimated and recorded in Table 3. Having determined these parameters, the transfer function model in Equation 3a simplifies to:

$$(1 - \delta_1 B)y_t = (\omega_0 - \omega_1)x_t + n_t \quad (12)$$

Table 3. Autoregressive parameter ϕ , variances s_α^2 and s_β^2 , approximate standard errors $\sigma'(r)$, stochastic transfer function models parameters δ_1 , ω_0 and ω_1 for Francistown, Gaborone and Maun

Parameter	Francistown	Gaborone	Maun
ϕ	-0.50	-0.45	-0.51
s_α^2	3.14	2.82	2.44
s_β^2	7.78	6.17	11.13
$\sigma'(r)$	0.05	0.05	0.06
δ_1	0.40	0.08	7.24
ω_0	0.33	0.14	0.20
ω_1	0.08	-0.15	1.40

Table 4. Autocorrelation Function (ACF), Partial Autocorrelation Function (PACF) for Francistown, Gaborone and Maun

k	Francistown		Gaborone		Maun	
	ACF	PACF	ACF	PACF	ACF	PACF
1	-0.64	-0.64	-0.48	-0.48	-0.46	-0.46
2	0.15	-0.43	-0.02	-0.32	-0.04	-0.31
3	-0.01	-0.28	0.03	-0.2	-0.02	-0.27
4	-0.03	-0.24	-0.08	-0.24	0.04	-0.18
5	0.03	-0.17	0.11	-0.09	-0.04	-0.19
6	-0.01	-0.12	-0.1	-0.15	0.08	-0.06
7	-0.03	-0.17	0.05	-0.1	-0.09	-0.12
8	0.07	-0.1	0.02	-0.04	0.06	-0.05
9	-0.07	-0.13	-0.03	-0.04	-0.03	-0.04
10	0.09	0.01	-0.08	-0.19	-0.08	-0.18
11	-0.09	0.01	0.13	-0.05	0.08	-0.11
12	-0.02	-0.14	-0.07	-0.1	0.04	-0.02
13	0.09	-0.11	0.08	0.03	-0.05	-0.03
14	-0.03	-0.02	-0.09	-0.07	-0.01	-0.06
15	-0.05	-0.11	0.03	-0.04	0.04	-0.01

Table 5. Autoregressive parameter ζ for the noise components, for Francistown, Gaborone and Maun

Parameter	Francistown	Gaborone	Maun
ζ	-0.90	-0.80	-0.85

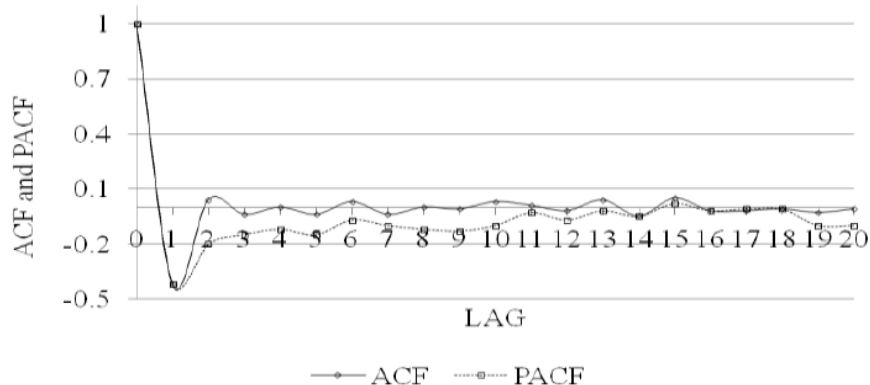
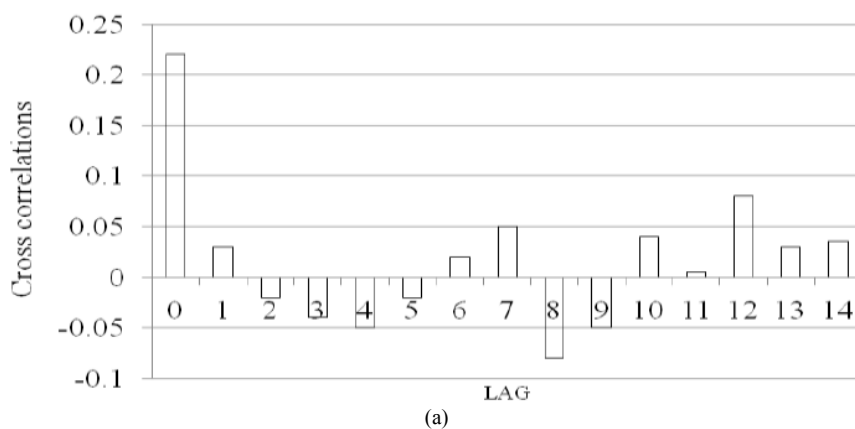


Fig. 3. Autocorrelation Function (ACF) and Partial Autocorrelation Function (PACF) for the stationary monthly maximum temperature series for Francistown. 95% confidence limits = ± 0.1



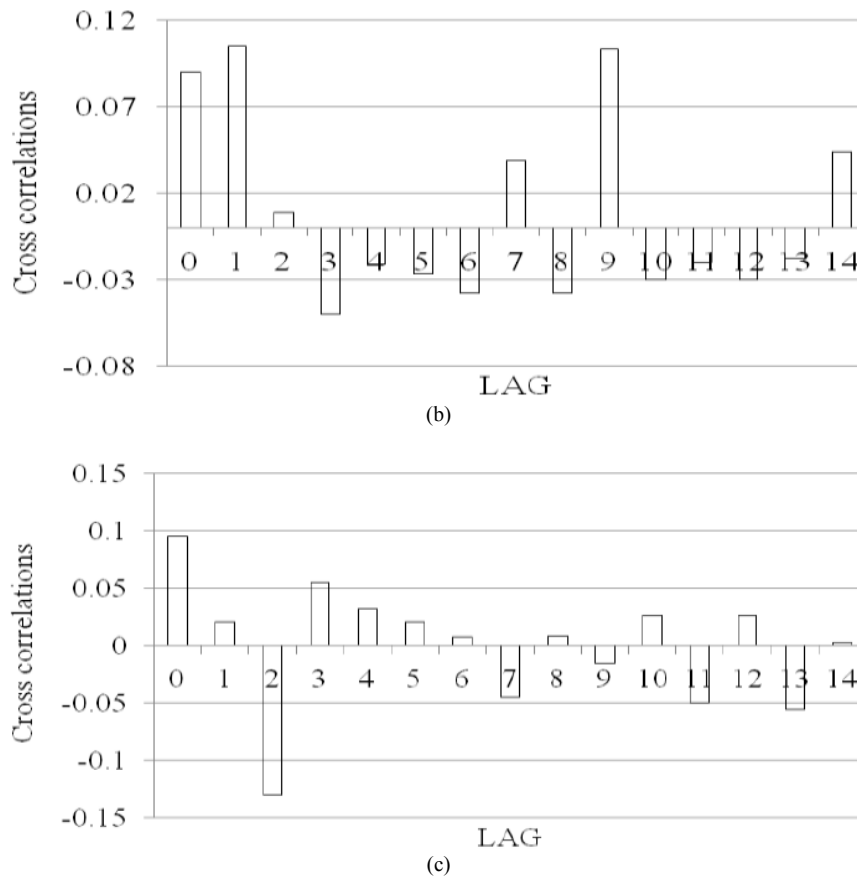


Fig. 4. Cross Correlation Functions (CCFs) between monthly maximum temperature and evaporation for the prewhitened series for (a) Francistown, (b) Gaborone and (c) Maun. Confidence limits for Francistown and Gaborone = ± 0.05 , for Maun = ± 0.06 .

The Noise Component

To determine the equation for the noise component n_t , in Equation 12, the estimated values of the parameters δ_1 , ω_0 and ω_1 were used to generate the series:

$$y'_t = \delta_1 y'_{t-1} + \omega_0 x_t - \omega_1 x_{t-1} \tag{13}$$

which was then used to estimate the n_t series as $(y_t - y'_t)$. Autocorrelation and partial autocorrelation functions of the n_t series were computed and recorded in Table 4. They were used to identify the noise models for the selected stations. The identified noise models were autoregressive models of order 1, of the form:

$$(1 - \xi B)n_t = a_t \tag{14}$$

The estimated values of the autoregressive parameter ξ in Equation 14 are recorded in Table 5.

The Final Transfer Function-Noise Models

By Equation 12, 14 and the estimated parameters in Table 3 to 5, the transfer function-noise models fitted to

the strongly correlated monthly maximum temperature and evaporation series for Francistown, Gaborone and Maun are Equation 15a-c respectively:

$$\left. \begin{aligned} (1 - 0.40B)\nabla y_t &= (0.33 + 0.08B)\nabla x_t + n_t \\ n_t &= a_t / (1 + 0.90B) \end{aligned} \right] \tag{15a}$$

$$\left. \begin{aligned} (1 - 0.08B)\nabla y_t &= (0.14 + 0.15B)\nabla x_t + n_t \\ n_t &= a_t / (1 + 0.80) \end{aligned} \right] \tag{15b}$$

$$\left. \begin{aligned} (1 - 7.24B)\nabla y_t &= (0.20 - 1.40B)\nabla x_t + n_t \\ n_t &= a_t / (1 + 0.85B) \end{aligned} \right] \tag{15c}$$

The transfer function-noise models (Equation 15a-c) fitted to the data, were checked for adequacy using the criteria of Box and Jenkins (1970) and were found to be adequate. The models involve a small number of parameters, their cross correlation functions decay after a finite lag k (Fig. 4a to 4c) and absolute values of the autoregressive parameter ξ (Table 5) of the noise models are less than 1.

Conclusion

Correlations between Botswana's monthly maximum temperature and evaporation and between monthly maximum wind speed and evaporation for Maun, Francistown and Gaborone were assessed. The correlations between monthly maximum temperature and evaporation were found to be much stronger than those between monthly maximum wind speed and evaporation. The more strongly correlated monthly maximum temperature and evaporation were modelled using transfer function-noise models given as Equation 15a-15c, for Francistown, Gaborone and Maun respectively. When checked for adequacy using the Box and Jenkins (1970) criteria, the models were found to be adequate. Such models can be used to predict the evaporation output series with a lead time of a few months. The results of the study are crucial primarily to those responsible for the management of the limited water resources in Botswana, agriculture and other related applications.

Acknowledgement

The University of Botswana's Office of Research and Development is appreciated for supporting this research, as well as the Botswana Department of Meteorological Services for providing the data. The authors would also like to thank Dr E. Bennitt for proof reading this paper.

Author's Contributions

Oliver Moses: Conceptualization of the research, organization of ideas, data requisition and analysis, interpretation of the results and article write up.

Edward Lungu: Participated in the conceptualization of the research and organization of ideas, data analysis, interpretation of the results and article write up.

Bhagabat Prasad Parida: Participated in the conceptualization of the research and organization of ideas, data analysis, interpretation of the results and article write up.

Ethics

All the authors give assurance that no part of this original research article is being considered for publication in whole or in part elsewhere and all the authors have read and approved the manuscript.

References

Ahrens, C.D., 1994. *Meteorology Today: An Introduction to Weather, Climate and the Environment*. 5th Edn., West Publishing Company, New York, pp: 112.
AMPJ, 2016. A multi-phased journey.

- Bhalotra, Y.P.R., 1984. *Climate of Botswana part I: Climatic controls*. Department of Meteorological Services, Gaborone, Botswana.
- Bhalotra, Y.P.R., 1987. *Climate of Botswana part II: Elements of climate*. Department of Meteorological Services, Gaborone, Botswana.
- Bierkens, M.F.P. and M. Knotters, 1999. Calibration of transfer function-noise models to sparsely or irregularly observed time series. *Water Resource Res.*, 35: 1741-1750.
DOI: 10.1029/1999WR900083
- Box, G.E.P. and G.M. Jenkins, 1970. *Time series analysis: forecasting and control*. 1st Edn., Holden-Day, San Francisco, pp: 10.
- Box, G.E.P. and G.M. Jenkins, 1976. *Time Series Analysis: Forecasting and Control*. 1st Edn., Holden-Day, San Francisco, pp: 15.
- Box, G.E.P., G.M. Jenkins and G.C. Reinsel, 1994. *Time Series Analysis: Forecasting and Control*. 3rd Edn., Prentice-hall, USA., pp: 98.
- Chatfield, C., 2004. *The analysis of Time Series: An Introduction*. 6th Edn., Chapman and Hall/CRC, New York, pp: 333.
- Condorena, E.G.B. and A.C. da Costa., 2011. A method of transfer functions and block diagrams to study the contribution of variables in artificial neural network process models. *Proceedings of the World Congress on Engineering and Computer Science*, Oct. 19-21, San Francisco, USA.
- Deng, J., X. Yang and P. Wang, 2015. Study on the second-order transfer function models for dynamic tests of flat-plate solar collectors Part I: A proposed new model and a fitting methodology. *Solar Energy*, 114: 418-426.
DOI: 10.1016/j.solener.2015.01.046
- Diggle, P.J. and A.G. Chetwynd, 2011. *Statistics and Scientific Method: An Introduction for Students and Researchers*. 1st Edn., Oxford University Press, UK., ISBN-10: 0199543194, pp: 192.
- Harvey, A.C., 1993. *Time Series Models*. 2nd Edn., Harvester Wheatsheaf, New York, pp: 7.
- Huang, F.P. and B. Wu, 2014. Using the transfer function model in analyzing and forecasting students' studying achievement. *J. Bus. Econom.*, 5: 2052-2056.
DOI: 10.15341/jbe(2155-7950)/11.05.2014/009
- Jain, P.K. and E.M. Lungu, 2003. Stochastic models for sunshine duration and solar irradiation. *J. Renewable Energy*, 27: 197-209.
DOI: 10.1016/S0960-1481(01)00190-2
- Jenkins, G.M., 1979. *Practical Experiences with Modelling and Forecasting Time Series*. 1st Edn., Gwilym Jenkins and Partners, Jersey, ISBN-10: 0950642304, pp: 146.

- Kenabatho, P.K., B.P. Parida, D.B. Moalafhi and T. Segosebe, 2015. Analysis of rainfall and large-scale predictors using a stochastic model and artificial neural network for hydrological applications in southern Africa. *J. Hydrol. Sci.*, 60: 1943-1955.
DOI: 10.1080/02626667.2015.1040021
- Kumar, P., G. Rasul and D. Kumar, 2013. Evaporation estimation from climatic factors. *Pak. J. Meteorol.*, 9: 51-57.
- LC, 2016. Lagged correlation.
- Larsson, F., 1986. Wind resources in Botswana. Ministry of Mineral Resources and Water Affairs, Gaborone, Botswana.
- Lungu, E.M., 1991. Stochastic characteristics of rainfall-runoff processes in Southeast Botswana. *J. Hydrol. Sci.*, 36: 423-434.
DOI: 10.1080/02626669109492528
- Lungu, E.M., P.K. Jain and J. Prakash, 2003. Correlation between rainfall and extreme temperatures in Botswana: A preliminary study. *J. Inst. Math. Comput. Sci.*, 14: 43-54.
- Lungu, E.M. and F.T.K. Sefe, 1991. Stochastic analysis of monthly streamflows. *J. Hydrol. Sci.*, 126: 171-182.
DOI: 10.1016/0022-1694(91)90154-A
- Manzione, R.L., M. Knotters, G.B. Heuvelink, J.R. Asmuth and G. Camara, 2010. Transfer function-noise modeling and spatial interpolation to evaluate the risk of extreme (shallow) water-table levels in the Brazilian Cerrados. *Hydrogeol. J.*, 18: 1927-1937.
DOI: 10.1007/s10040-010-0654-5
- Montgomery, D.C., C.L. Jennings and M. Kulahci, 2008. *Introduction to Time Series Analysis*. 1st Edn., John Wiley and Sons, New Jersey, pp: 18.
- Moran, J.M. and M.D. Morgan, 1986. *Meteorology: The Atmosphere and the Science of Weather*. 1st Edn., Macmillan Publishing Company, New York, pp: 147.
- Moses, O., 2007. Study of stochastic and statistical behaviour of some climatic parameters in Botswana. Unpublished dissertation in partial fulfillment of the requirements for the degree of Master of Philosophy, University of Botswana, Botswana.
- Moses, O. and B.P. Parida, 2016. Statistical modelling of Botswana's monthly maximum wind speed using a four-parameter kappa distribution. *Am. J. Applied Sci.* DOI: 10.3844/ajassp.2016.773.778
- Nkuna, T.R. and J.O. Odiyo, 2016. The relationship between temperature and rainfall variability in the Levubu sub-catchment, South Africa. *Int. J. Environ. Sci.*, 1: 66-75.
- Park, S. and J. Koo, 2015. Application of Transfer Function ARIMA Modeling for the Sedimentation Process on Water Treatment Plant. *Int. J. Control Automat.*, 8: 35-44.
DOI: 10.14257/ijca.2015.8.10.13
- Pike, J.G., 1971. Surveys and training for the development of water resources and agricultural production: Rainfall and evaporation in Botswana. United Nations Development Program, Gaborone, Botswana.
- Pong-Wai, L., 1979. Transfer function modelling relationship between time series variables. Mid Anglia Litho, UK.
- Romanowicz, R.J., A. Kiczko and J.J. Napiorkowski, 2010. Stochastic transfer function model applied to combined reservoir management and flow routing. *Hydrol. Sci. J.*, 55: 27-40.
DOI: 10.1080/02626660903526029
- Rummel, R.J., 1976. *Understanding correlation*. University of Hawaii, USA.
- Shaw, E.M., 1983. *Hydrology in Practice*. 2nd Edn., Chapman and Hall, London, pp: 23.
- Singh, V., 1992. *Elementary Hydrology*. 1st Edn., Prentice Hall, NJ, USA, pp: 7.
- SMEC, 1987. Study of open water evaporation in Botswana. Department of Water Affairs, Gaborone, Botswana.
- Xu, C.Y. and V.P. Singh, 1998. Dependence of evaporation on meteorological variables at different time-scales and intercomparison of estimation methods. *Hydrol. Process*, 12: 429-442. DOI: 10.1002/(SICI)1099-1085(19980315)12:3<429::AID-HYP581>3.0.CO;2-A
- Yu, J., Y. Liang, S. Thompson, G. Cull and L. Wang, 2014. Parametric transfer function analysis and modeling of blood flow autoregulation in the optic nerve head. *Int. J. Physiol. Pathophysiol. Pharmacol.*, 6: 13-22. PMID: 24665355
- USAID, 2013. Anthropocentric climate change and hydro-climatic conditions in the Cubango-Okavango river basin. United States Agency for International Development.