

Geometry and Direct Kinematics to MP3R with 4×4 Operators

¹Relly Victoria Petrescu, ²Raffaella Aversa, ³Bilal Akash,
⁴Filippo Berto, ²Antonio Apicella and ¹Florian Ion Tiberiu Petrescu

¹ARoTMM-IFTToMM, Bucharest Polytechnic University, Bucharest, (CE), Romania

²Advanced Material Lab, Department of Architecture and Industrial Design,
Second University of Naples, 81031 Aversa (CE), Italy

³Dean of School of Graduate Studies and Research, American University of Ras Al Khaimah, UAE

⁴Department of Engineering Design and Materials, NTNU, Trondheim, Norway

Article history

Received: 08-10-2017

Revised: 17-11-2017

Accepted: 25-11-2017

Corresponding Author:

Florian Ion Tiberiu Petrescu
ARoTMM-IFTToMM, Bucharest
Polytechnic University,
Bucharest, (CE), Romania
E-mail: scipub02@gmail.com

Abstract: Anthropomorphic mechatronic systems are the most widely used robotics systems worldwide today in industry and in all automated environments. These systems are best suited to the modern automation and mechatronisation needs of the modern world, being mobile, dynamic, light, robust, complex, technologically simple, easy to design and manufactured, implemented, maintained and used in almost any industrial site, both in machine building and in special environments, such as chemical, toxic, dyeing, underwater, nuclear, in space.... Anthropomorphic robots are flexible, dynamic, stable, lightweight, fast, fast, inexpensive, easy-to-install, mechanical, mechanical, mechanical and mechanical systems with a pleasant appearance, modern industrial design and easy to design and implement in any workplace, imposed. In this study we will present the 4×4 operators and the way they can be implemented and used in the complex matrix calculations in order to simplify the complex matrix algebraic numerical methods. 4×4 operators are designed to simplify algebraic matrix calculations by making difficult matrix operations simpler and easier to approach. The method of using 4×4 operators is meant to introduce a degree in addition to the matrices to facilitate algebraic operations. The kinematics of serial manipulators and robots will be exemplified for the 3R kinematic model. The fixed coordinate system was denoted by $x_0O_0y_0z_0$. The mobile systems (rigid) of the three mobile elements (1, 2, 3) have indices 1, 2 and 3. Their orientation has been chosen conveniently. Known kinematic parameters in the direct kinematics are the absolute rotation angles of the three moving elements: φ_{10} , φ_{20} , φ_{30} , angles related to the rotation of the three actuators (electric motors) mounted in the kinematic rotation couplers. The output parameters are the three absolute coordinates x_M , y_M , z_M of point M, i.e., the kinematic parameters (coordinates) of the endeffector (the actuator element (the final), which can be a grasping hand, a solder tip, painted, cut, etc ...). The 3×3 matrix is transformed into 4×4 (it is a mathematical operator) by adding two zero vectors (formed from three elements 0), one line and the other column, and adding one element 1 to the main diagonal (the last element). The matched T_{01} matrix becomes T_{01}^4 . The column vector matrix (consisting of three elements) undergoes a minimal transformation receiving a fourth fixed value 1 if it is only used for matrix products. The convenient form of matrix A_{12} is A_{12}^c .

Keywords: Anthropomorphic Mechatronic Systems, Robots, Geometry, Kinematics, 4×4 Operators

Introduction

Anthropomorphic mechatronic systems are the most widely used robotics systems worldwide today in industry and in all automated environments. These systems are best suited to the modern automation and mechatronisation needs of the modern world, being mobile, dynamic, light, robust, complex, technologically simple, easy to design and manufactured, implemented, maintained and used in almost any industrial site, both in machine building and in special environments, such as chemical, toxic, dyeing, underwater, nuclear, in space.... Anthropomorphic robots are flexible, dynamic, stable, lightweight, fast, fast, inexpensive, easy-to-install, mechanical, mechanical, mechanical and mechanical systems with a pleasant appearance, modern industrial design and easy to design and implement in any workplace, imposed. In this study we will present the 4x4 operators and the way they can be implemented and used in the complex matrix calculations in order to simplify the complex matrix algebraic numerical methods. 4x4 operators are designed to simplify algebraic matrix calculations by making difficult matrix operations simpler and easier to approach. The method of using 4x4 operators is meant to introduce a degree in addition to the matrices to facilitate algebraic operations. (Antonescu and Petrescu, 1985; 1989; Antonescu *et al.*, 1985a; 1985b; 1986; 1987; 1988; 1994; 1997; 2000a; 2000b; 2001; Aversa *et al.*, 2017a; 2017b; 2017c; 2017d; 2017e; 2016a; 2016b; 2016c; 2016d; 2016e; 2016f; 2016g; 2016h; 2016i; 2016j; 2016k; 2016l; 2016m; 2016n; 2016o; Berto *et al.*, 2016a; 2016b; 2016c; 2016d; Cao *et al.*, 2013; Dong *et al.*, 2013; Comanescu, 2010; Franklin, 1930; He *et al.*, 2013; Lee, 2013; Lin *et al.*, 2013; Liu *et al.*, 2013; Mirsayar *et al.*, 2017; Padula and Perdereau, 2013; Perumaal and Jawahar, 2013; Petrescu, 2011; 2015a; 2015b; Petrescu and Petrescu, 1995a; 1995b; 1997a; 1997b; 1997c; 2000a; 2000b; 2002a; 2002b; 2003; 2005a; 2005b; 2005c; 2005d; 2005e; 2011; 2012a; 2012b; 2013a; 2013b; 2016a; 2016; 2016c; Petrescu *et al.*, 2009; 2016; 2017a; 2017b; 2017c; 2017d; 2017e; 2017f; 2017g; 2017h; 2017i; 2017j; 2017k; 2017l).

Materials and Methods

The kinematics of serial manipulators and robots will be exemplified for the 3R kinematic model (Fig. 1).

The fixed coordinate system was denoted by $x_0O_0y_0z_0$. The mobile systems (rigid) of the three mobile elements (1, 2, 3) have indices 1, 2 and 3. Their orientation has been chosen conveniently. Known kinematic parameters in the direct kinematics are the absolute rotation angles of the three moving elements: ϕ_{10} , ϕ_{20} , ϕ_{30} , angles related to the rotation of the three actuators (electric motors) mounted in the kinematic

rotation couplers. The output parameters are the three absolute coordinates x_M , y_M , z_M of point M, ie the kinematic parameters (coordinates) of the endeffector (the actuator element (the final), which can be a grasping hand, a solder tip, painted, cut, etc ...).

The 3x3 matrix is transformed into 4x4 (it is a mathematical operator) by adding two zero vectors (formed from three elements 0), one line and the other column, and adding one element 1 to the main diagonal (the last element). The matched T_{01} matrix becomes T_{01}^4 (relation 1):

$$T_{01} = \begin{bmatrix} \alpha_x & \beta_x & \gamma_x \\ \alpha_y & \beta_y & \gamma_y \\ \alpha_z & \beta_z & \gamma_z \end{bmatrix} = \begin{bmatrix} \cos \phi_{10} & -\sin \phi_{10} & 0 \\ \sin \phi_{10} & \cos \phi_{10} & 0 \\ 0 & 0 & 0 \end{bmatrix} \Rightarrow$$

$$\Rightarrow T_{01}^4 = \begin{bmatrix} \alpha_x & \beta_x & \gamma_x & 0 \\ \alpha_y & \beta_y & \gamma_y & 0 \\ \alpha_z & \beta_z & \gamma_z & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} \cos \phi_{10} & -\sin \phi_{10} & 0 & 0 \\ \sin \phi_{10} & \cos \phi_{10} & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad (1)$$

The column vector matrix (consisting of three elements) undergoes a minimal transformation receiving a fourth fixed value 1 if it is only used for matrix products.

The convenient form of matrix A_{12} is A_{12}^c (2):

$$A_{12} = \begin{bmatrix} d_1 \\ a_2 \\ 0 \end{bmatrix} \Rightarrow A_{12}^c = \begin{bmatrix} d_1 \\ a_2 \\ 0 \\ 1 \end{bmatrix} \quad (2)$$

The resulting product is also a 4x1 column vector (3):

$$T_{01}^4 \cdot A_{12}^c = \begin{bmatrix} \cos \phi_{10} & -\sin \phi_{10} & 0 & 0 \\ \sin \phi_{10} & \cos \phi_{10} & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \cdot \begin{bmatrix} d_1 \\ a_2 \\ 0 \\ 1 \end{bmatrix} =$$

$$= \begin{bmatrix} d_1 \cdot \cos \phi_{10} & -a_2 \cdot \sin \phi_{10} \\ d_1 \cdot \sin \phi_{10} & +a_2 \cdot \cos \phi_{10} \\ 0 \\ 1 \end{bmatrix} \quad (3)$$

When the vector matrices multiply, it is sufficient to transform them into the vector matrix 4x1 column. However, if a vector matrix has to be assembled to convert the sum (from the space of 3 dimensions 3x3 or 3x1) into a multiplication operation (produced in space with 4 dimensions 4x4 or 4x1) of matrices, no 4x1 forms are allowed only 4x4 (4-7):

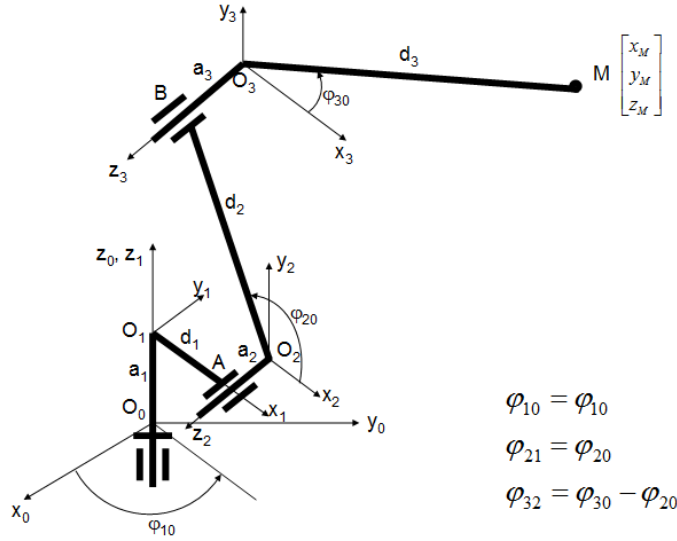


Fig. 1: The geometry and cinematic of a MP3R

$$T_{01}^4 \cdot T_{12}^4 = \begin{bmatrix} \cos \phi_{10} & -\sin \phi_{10} & 0 & 0 \\ \sin \phi_{10} & \cos \phi_{10} & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \cdot \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad (4)$$

$$= \begin{bmatrix} \cos \phi_{10} & 0 & \sin \phi_{10} & 0 \\ \sin \phi_{10} & 0 & -\cos \phi_{10} & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$T_{01}^4 \cdot T_{12}^4 \cdot T_{23}^4 \cdot X_{3M}^c = \begin{bmatrix} \cos \phi_{10} & 0 & \sin \phi_{10} & 0 \\ \sin \phi_{10} & 0 & -\cos \phi_{10} & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \cdot \begin{bmatrix} d_3 \cdot \cos \phi_{30} \\ d_3 \cdot \sin \phi_{30} \\ 0 \\ 1 \end{bmatrix} \quad (7)$$

$$= \begin{bmatrix} d_3 \cdot \cos \phi_{10} \cdot \cos \phi_{30} \\ d_3 \cdot \sin \phi_{10} \cdot \cos \phi_{30} \\ d_3 \cdot \sin \phi_{30} \\ 1 \end{bmatrix}$$

$$T_{01}^4 \cdot T_{12}^4 \cdot A_{23}^c = \begin{bmatrix} \cos \phi_{10} & 0 & \sin \phi_{10} & 0 \\ \sin \phi_{10} & 0 & -\cos \phi_{10} & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \cdot \begin{bmatrix} d_2 \cdot \cos \phi_{20} \\ d_2 \cdot \sin \phi_{20} \\ -a_3 \\ 1 \end{bmatrix} \quad (5)$$

$$= \begin{bmatrix} d_2 \cdot \cos \phi_{10} \cdot \cos \phi_{20} - a_3 \cdot \sin \phi_{10} \\ d_2 \cdot \sin \phi_{10} \cdot \sin \phi_{20} + a_3 \cdot \cos \phi_{10} \\ d_2 \cdot \sin \phi_{20} \\ 1 \end{bmatrix}$$

$$T_{01}^4 \cdot T_{12}^4 \cdot T_{23}^4 = \begin{bmatrix} \cos \phi_{10} & 0 & \sin \phi_{10} & 0 \\ \sin \phi_{10} & 0 & -\cos \phi_{10} & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad (6)$$

$$\cdot \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$T_{01}^4 \cdot T_{12}^4 \cdot T_{23}^4 = \begin{bmatrix} \cos \phi_{10} & 0 & \sin \phi_{10} & 0 \\ \sin \phi_{10} & 0 & -\cos \phi_{10} & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad (6')$$

We have prepared the arrays necessary for the summation, now we can go directly to their assembly in the form of column vectors (3x1 or 4x1). In this way the direct result is obtained, and the operators we have complicated do not use anymore (apparently). We will still use the form with operators first to see how they work, and then we will resume the algorithm intelligently to understand the role of the operators. To make the addition in multiplication (matrix product) by operators, we must have a 4x4 matrix. In this case, whether we have a product or a sum, we perform the product of the 4x4 operator matrices (so using matrices expanded to 4x4 we perform only matrix product regardless of whether it is a sum in 3x3 or a multiplication). A 4x1 vector array is operationally written 4x4 by completing the 3x3 unit matrix below it with a 1x3 vector zero line (0, 0, 0) and right with the original vector 4x1.

When making the actual amount, things get complicated and at first sight this complication seems useless, but its role is essential (as we will see later) to work directly with transfer matrices. This is the real role of operators.

The assembly to be performed is (between the operator arrays the sign is + instead of +):

$$A_{01}^4 + (T_{01}^4 \cdot A_{12}^c)^4 + (T_{01}^4 \cdot T_{12}^4 \cdot A_{23}^c)^4 + (T_{01}^4 \cdot T_{12}^4 \cdot T_{23}^4 \cdot X_{3M}^c)^4$$

(see relationship (8):

$$\begin{aligned}
 A_{01}^4 + (T_{01}^4 \cdot A_{12}^c)^4 + (T_{01}^4 \cdot T_{12}^4 \cdot A_{23}^c)^4 + (T_{01}^4 \cdot T_{12}^4 \cdot T_{23}^4 \cdot X_{3M}^c)^4 &= \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & a_1 \\ 0 & 0 & 0 & 1 \end{bmatrix} \cdot \begin{bmatrix} 1 & 0 & 0 & (d_1 \cdot \cos \phi_{10} - a_2 \cdot \sin \phi_{10}) \\ 0 & 1 & 0 & (d_1 \cdot \sin \phi_{10} + a_2 \cdot \cos \phi_{10}) \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \\
 \begin{bmatrix} 1 & 0 & 0 & (d_2 \cdot \cos \phi_{10} \cdot \cos \phi_{20} - a_3 \cdot \sin \phi_{10}) \\ 0 & 1 & 0 & (d_2 \cdot \sin \phi_{10} \cdot \cos \phi_{20} + a_3 \cdot \cos \phi_{10}) \\ 0 & 0 & 1 & d_2 \cdot \sin \phi_{20} \\ 0 & 0 & 0 & 1 \end{bmatrix} &= \begin{bmatrix} 1 & 0 & 0 & (d_1 \cdot \cos \phi_{10} - a_2 \cdot \sin \phi_{10}) \\ 0 & 1 & 0 & (d_1 \cdot \sin \phi_{10} + a_2 \cdot \cos \phi_{10}) \\ 0 & 0 & 1 & a_1 \\ 0 & 0 & 0 & 1 \end{bmatrix} \\
 \begin{bmatrix} 1 & 0 & 0 & (d_2 \cdot \cos \phi_{10} \cdot \cos \phi_{20} - a_3 \cdot \sin \phi_{10}) \\ 0 & 1 & 0 & (d_2 \cdot \sin \phi_{10} \cdot \cos \phi_{20} + a_3 \cdot \cos \phi_{10}) \\ 0 & 0 & 1 & d_2 \cdot \sin \phi_{20} \\ 0 & 0 & 0 & 1 \end{bmatrix} &= \begin{bmatrix} 1 & 0 & 0 & (d_3 \cdot \cos \phi_{10} \cdot \cos \phi_{30}) \\ 0 & 1 & 0 & (d_3 \cdot \sin \phi_{10} \cdot \cos \phi_{30}) \\ 0 & 0 & 1 & d_3 \cdot \sin \phi_{30} \\ 0 & 0 & 0 & 1 \end{bmatrix} \\
 \begin{bmatrix} 1 & 0 & 0 & (d_2 \cdot \cos \phi_{10} \cdot \cos \phi_{20} - a_3 \cdot \sin \phi_{10}) \\ 0 & 1 & 0 & (d_2 \cdot \sin \phi_{10} \cdot \cos \phi_{20} + a_3 \cdot \cos \phi_{10}) \\ 0 & 0 & 1 & d_2 \cdot \sin \phi_{20} \\ 0 & 0 & 0 & 1 \end{bmatrix} &= \begin{bmatrix} 1 & 0 & 0 & (d_3 \cdot \cos \phi_{10} \cdot \cos \phi_{30}) \\ 0 & 1 & 0 & (d_3 \cdot \sin \phi_{10} \cdot \cos \phi_{30}) \\ 0 & 0 & 1 & d_3 \cdot \sin \phi_{30} \\ 0 & 0 & 0 & 1 \end{bmatrix}
 \end{aligned} \tag{8}$$

The relationship (8) continues with (8'):

$$\begin{aligned}
 \begin{bmatrix} 1 & 0 & 0 & (d_1 \cdot \cos \phi_{10} - a_2 \cdot \sin \phi_{10} + d_2 \cdot \cos \phi_{10} \cdot \cos \phi_{20} - a_3 \cdot \sin \phi_{10}) \\ 0 & 1 & 0 & (d_1 \cdot \sin \phi_{10} + a_2 \cdot \cos \phi_{10} + d_2 \cdot \sin \phi_{10} \cdot \cos \phi_{20} + a_3 \cdot \cos \phi_{10}) \\ 0 & 0 & 1 & (a_1 + d_2 \cdot \sin \phi_{20}) \\ 0 & 0 & 0 & 1 \end{bmatrix} &= \begin{bmatrix} 1 & 0 & 0 & (d_3 \cdot \cos \phi_{10} \cdot \cos \phi_{30}) \\ 0 & 1 & 0 & (d_3 \cdot \sin \phi_{10} \cdot \cos \phi_{30}) \\ 0 & 0 & 1 & d_3 \cdot \sin \phi_{30} \\ 0 & 0 & 0 & 1 \end{bmatrix} \\
 \begin{bmatrix} 1 & 0 & 0 & (d_1 \cos \phi_{10} - a_2 \sin \phi_{10} + d_2 \cos \phi_{10} \cos \phi_{20} - a_3 \sin \phi_{10} + d_3 \cos \phi_{10} \cos \phi_{30}) \\ 0 & 1 & 0 & (d_1 \sin \phi_{10} + a_2 \cos \phi_{10} + d_2 \sin \phi_{10} \cos \phi_{20} + a_3 \cos \phi_{10} + d_3 \sin \phi_{10} \cos \phi_{30}) \\ 0 & 0 & 1 & (a_1 + d_2 \cdot \sin \phi_{20} + d_3 \cdot \sin \phi_{30}) \\ 0 & 0 & 0 & 1 \end{bmatrix} &= \begin{bmatrix} 1 & 0 & 0 & (d_1 \cos \phi_{10} - a_2 \sin \phi_{10} + d_2 \cos \phi_{10} \cos \phi_{20} - a_3 \sin \phi_{10} + d_3 \cos \phi_{10} \cos \phi_{30}) \\ 0 & 1 & 0 & (d_1 \sin \phi_{10} + a_2 \cos \phi_{10} + d_2 \sin \phi_{10} \cos \phi_{20} + a_3 \cos \phi_{10} + d_3 \sin \phi_{10} \cos \phi_{30}) \\ 0 & 0 & 1 & (a_1 + d_2 \cdot \sin \phi_{20} + d_3 \cdot \sin \phi_{30}) \\ 0 & 0 & 0 & 1 \end{bmatrix}
 \end{aligned} \tag{8'}$$

Next step will be to step-by-step determination of the transfer matrix from left to right, which was not possible in the 3x3 system. The relationship (9) is written in the form (9'); we see how the sum turns into a product due to 4x4 operators, which allows us to carry out the operation between matrices from left to right because we do not add or multiply (9-12).

$$X_{0M} = A_{01} + T_{01} \cdot X_{1M} \tag{9}$$

$$X_{0M}^4 = A_{01}^4 \cdot T_{01}^4 \cdot X_{1M}^4 = D_{01} \cdot X_{0M}^4 \tag{9'}$$

$$\begin{aligned}
 D_{01} &= \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & a_1 \\ 0 & 0 & 0 & 1 \end{bmatrix} \cdot \begin{bmatrix} \cos \phi_{10} & -\sin \phi_{10} & 0 & 0 \\ \sin \phi_{10} & \cos \phi_{10} & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \\
 &= \begin{bmatrix} \cos \phi_{10} & -\sin \phi_{10} & 0 & 0 \\ \sin \phi_{10} & \cos \phi_{10} & 0 & 0 \\ 0 & 0 & 1 & a_1 \\ 0 & 0 & 0 & 1 \end{bmatrix}
 \end{aligned} \tag{10}$$

$$\begin{cases} X_{1M} = A_{12} + T_{12} \cdot X_{2M} \\ X_{1M}^4 = A_{12}^4 \cdot T_{12}^4 \cdot X_{2M}^4 = D_{12} \cdot X_{2M}^4 \Rightarrow \\ \Rightarrow D_{12} = A_{12}^4 \cdot T_{12}^4 \end{cases} \tag{11}$$

$$\begin{aligned}
 D_{12} &= \begin{bmatrix} 1 & 0 & 0 & d_1 \\ 0 & 1 & 0 & a_2 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \cdot \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} = \\
 &= \begin{bmatrix} 1 & 0 & 0 & d_1 \\ 0 & 0 & -1 & a_2 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}
 \end{aligned} \tag{12}$$

It found the crossings from 0 to 1 and from 1 to 2; at this point we do not go any further until we set the transition from 0 to 2 (13-14).

$$X_{0M}^4 = D_{01} \cdot X_{1M}^4 = D_{01} \cdot D_{12} \cdot X_{2M}^4 = D_{02} \cdot X_{2M}^4 \quad (13)$$

$$\Rightarrow D_{02} = D_{01} \cdot D_{12}$$

$$D_{02} = \begin{bmatrix} \cos \phi_{10} & -\sin \phi_{10} & 0 & 0 \\ \sin \phi_{10} & \cos \phi_{10} & 0 & 0 \\ 0 & 0 & 1 & a_1 \\ 0 & 0 & 0 & 1 \end{bmatrix} \cdot \begin{bmatrix} 1 & 0 & 0 & d_1 \\ 0 & 0 & -1 & a_2 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} = \quad (14)$$

$$= \begin{bmatrix} \cos \phi_{10} & 0 & \sin \phi_{10} & (d_1 \cos \phi_{10} - a_2 \sin \phi_{10}) \\ \sin \phi_{10} & 0 & -\cos \phi_{10} & (d_1 \sin \phi_{10} + a_2 \cos \phi_{10}) \\ 0 & 1 & 0 & a_1 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

Now you can go further on the chain to determine D23 (15-16):

$$\begin{cases} X_{2M} = A_{23} + T_{23} \cdot X_{3M} \text{ trecein} \\ X_{2M}^4 = A_{23}^4 \cdot T_{23}^4 \cdot X_{3M}^4 = D_{23} \cdot X_{3M}^4 \Rightarrow D_{23} = A_{23}^4 \cdot T_{23}^4 \end{cases} \quad (15)$$

$$D_{23} = \begin{bmatrix} 1 & 0 & 0 & d_2 \cos \phi_{20} \\ 0 & 1 & 0 & d_2 \sin \phi_{20} \\ 0 & 0 & 1 & a_1 \\ 0 & 0 & 0 & 1 \end{bmatrix} \cdot \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} = \quad (16)$$

$$= \begin{bmatrix} 1 & 0 & 0 & d_2 \cos \phi_{20} \\ 0 & 1 & 0 & d_2 \sin \phi_{20} \\ 0 & 0 & 1 & -a_3 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

The transfer input matrix D03 can now easily be found (17-18):

$$X_{0M}^4 = D_{02} \cdot X_{2M}^4 = D_{02} \cdot D_{23} \cdot X_{3M}^4 = D_{03} \cdot X_{3M}^4 \Rightarrow \quad (17)$$

$$\Rightarrow D_{03} = D_{02} \cdot D_{23}$$

$$D_{03} = \begin{bmatrix} \cos \phi_{10} & 0 & \sin \phi_{10} & (d_1 \cos \phi_{10} - a_2 \sin \phi_{10}) \\ \sin \phi_{10} & 0 & -\cos \phi_{10} & (d_1 \sin \phi_{10} + a_2 \cos \phi_{10}) \\ 0 & 1 & 0 & a_1 \\ 0 & 0 & 0 & 1 \end{bmatrix} \cdot \begin{bmatrix} 1 & 0 & 0 & d_2 \cos \phi_{20} \\ 0 & 1 & 0 & d_2 \sin \phi_{20} \\ 0 & 0 & 1 & -a_3 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad (18)$$

$$= \begin{bmatrix} \cos \phi_{10} & 0 & \sin \phi_{10} & (d_2 \cos \phi_{10} \cos \phi_{20} - a_3 \sin \phi_{10} + d_1 \cos \phi_{10} - a_2 \sin \phi_{10}) \\ \sin \phi_{10} & 0 & -\cos \phi_{10} & (d_2 \sin \phi_{10} \cos \phi_{20} + a_3 \cos \phi_{10} + d_1 \sin \phi_{10} + a_2 \cos \phi_{10}) \\ 0 & 1 & 0 & (d_2 \sin \phi_{20} + a_1) \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

The formula (17) can be simplified by reducing the X (4x4) matrices to the 4x1 column vector, because practically there is only a multiplication operation between the DX transfer matrix 4x4 and the vector X3M; as an observation (both forms may be used, but Xx vector type 4x1 is not required to matrix form 4x4, it is preferable to working with the simpler form), (19-20):

$$X_{0M}^4 = D_{03} \cdot X_{3M}^4 \Rightarrow X_{0M}^c = D_{03} \cdot X_{3M}^c \quad (19)$$

$$X_{0M}^c = D_{03} \cdot X_{3M}^c \Rightarrow \begin{bmatrix} x_{0M} \\ y_{0M} \\ z_{0M} \\ 1 \end{bmatrix} = D_{03} \cdot \begin{bmatrix} x_{3M} \\ y_{3M} \\ z_{3M} \\ 1 \end{bmatrix} = D_{03} \cdot \begin{bmatrix} d_3 \cdot \cos \phi_{30} \\ d_3 \cdot \sin \phi_{30} \\ 0 \\ 1 \end{bmatrix} = \quad (20)$$

$$\begin{bmatrix} d_3 \cos \phi_{10} \cos \phi_{30} + d_2 \cos \phi_{10} \cos \phi_{20} - a_3 \sin \phi_{10} + d_1 \cos \phi_{10} - a_2 \sin \phi_{10} \\ d_3 \sin \phi_{10} \cos \phi_{30} + d_2 \sin \phi_{10} \cos \phi_{20} + a_3 \cos \phi_{10} + d_1 \sin \phi_{10} + a_2 \cos \phi_{10} \\ d_3 \sin \phi_{30} + d_2 \sin \phi_{20} + a_1 \\ 1 \end{bmatrix}$$

From the type 4x1 vector, we get the 3x1 vector, which we really care about, eliminating the final line, ie the element 1 (21).

$$X_{0M} = \begin{bmatrix} d_3 \cos \phi_{10} \cdot \cos \phi_{30} + d_2 \cos \phi_{10} \cdot \cos \phi_{20} - \\ a_3 \sin \phi_{10} + d_1 \cos \phi_{10} - a_2 \sin \phi_{10} \\ d_3 \sin \phi_{10} \cdot \cos \phi_{30} + d_2 \sin \phi_{10} \cdot \cos \phi_{20} + \\ a_3 \cos \phi_{10} + d_1 \sin \phi_{10} + a_2 \cos \phi_{10} \\ d_3 \sin \phi_{30} + d_2 \sin \phi_{20} + a_1 \end{bmatrix} \quad (21)$$

Results

We can now write the coordinates of the M point taken separately, as functions of the independent rotation angles of the three movable elements (22).

$$\begin{cases} x_M = d_3 \cos \phi_{10} \cdot \cos \phi_{30} + d_2 \cos \phi_{10} \cdot \cos \phi_{20} - \\ -a_3 \sin \phi_{10} + d_1 \cos \phi_{10} - a_2 \sin \phi_{10} \\ y_M = d_3 \sin \phi_{10} \cdot \cos \phi_{30} + d_2 \sin \phi_{10} \cdot \cos \phi_{20} + \\ + a_3 \cos \phi_{10} + d_1 \sin \phi_{10} + a_2 \cos \phi_{10} \\ z_M = d_3 \sin \phi_{30} + d_2 \sin \phi_{20} + a_1 \end{cases} \quad (22)$$

Discussion

We have prepared the arrays necessary for the summation, now we can go directly to their assembly in the form of column vectors (3x1 or 4x1). In this way the direct result is obtained, and the operators we have complicated do not use anymore (apparently). We will still use the form with operators first to see how they work, and then we will resume the algorithm intelligently to understand the role of the operators. To make the addition in multiplication (matrix product) by operators, we must have a 4x4 matrix. In this case, whether we have a product or a sum, we perform the product of the 4x4 operator matrices (so using matrixes expanded to 4x4 we perform only matrix product regardless of whether it is a sum in 3x3 or a multiplication). A 4x1 vector array is operationally written 4x4 by completing the 3x3 unit matrix below it with a 1x3 vector zero line (0, 0, 0) and right with the original vector 4x1.

When making the actual amount, things get complicated and at first sight this complication seems useless, but its role is essential (as we will see later) to

work directly with transfer matrices. This is the real role of operators.

Conclusion

In this study we will present the 4x4 operators and the way they can be implemented and used in the complex matrix calculations in order to simplify the complex matrix algebraic numerical methods. 4x4 operators are designed to simplify algebraic matrix calculations by making difficult matrix operations simpler and easier to approach. The method of using 4x4 operators is meant to introduce a degree in addition to the matrices to facilitate algebraic operations. The kinematics of serial manipulators and robots will be exemplified for the 3R kinematic model. The fixed coordinate system was denoted by $x_0O_0y_0z_0$. The mobile systems (rigid) of the three mobile elements (1, 2, 3) have indices 1, 2 and 3. Their orientation has been chosen conveniently. Known kinematic parameters in the direct kinematics are the absolute rotation angles of the three moving elements: φ_{10} , φ_{20} , φ_{30} , angles related to the rotation of the three actuators (electric motors) mounted in the kinematic rotation couplers. The output parameters are the three absolute coordinates x_M , y_M , z_M of point M, ie the kinematic parameters (coordinates) of the endeffector (the actuator element (the final), which can be a grasping hand, a solder tip, painted, cut, etc ...). The 3x3 matrix is transformed into 4x4 (it is a mathematical operator) by adding two zero vectors (formed from three elements 0), one line and the other column, and adding one element 1 to the main diagonal (the last element). The matched T_{01} matrix becomes T_{01}^4 . The column vector matrix (consisting of three elements) undergoes a minimal transformation receiving a fourth fixed value 1 if it is only used for matrix products. The convenient form of matrix A_{12} is A_{12}^c .

Acknowledgement

This text was acknowledged and appreciated by Dr. Veturia CHIROIU Honoric member of Technical Sciences Academy of Romania (ASTR) PhD supervisor in Mechanical Engineering.

Funding Information

Research contract: 1-Research contract: Contract number 36-5-4D/1986 from 24IV1985, beneficiary CNST RO (Romanian National Center for Science and Technology) Improving dynamic mechanisms.

2-Contract research integration. 19-91-3 from 29.03.1991; Beneficiary: MIS; TOPIC: Research on designing mechanisms with bars, cams and gears, with application in industrial robots.

3-Contract research. GR 69/10.05.2007: NURC in

2762; theme 8: Dynamic analysis of mechanisms and manipulators with bars and gears.

4-Labor contract, no. 35/22.01.2013, the UPB, "Stand for reading performance parameters of kinematics and dynamic mechanisms, using inductive and incremental encoders, to a Mitsubishi Mechatronic System" "PN-II-IN-CI-2012-1-0389".

All these matters are copyrighted! Copyrights: 394-qodGnhhtej, from 17-02-2010 13:42:18; 463-vpstuCGsiy, from 20-03-2010 12:45:30; 631-sqfsgqvut, from 24-05-2010 16:15:22; 933-CrDztEfqow, from 07-01-2011 13:37:52.

Author's Contributions

This section should state the contributions made by each author in the preparation, development and publication of this manuscript.

Ethics

Authors should address any ethical issues that may arise after the publication of this manuscript.

References

- Antonescu, P. and F. Petrescu, 1985. An analytical method of synthesis of cam mechanism and flat stick. Proceedings of the 4th International Symposium on Theory and Practice of Mechanisms, (TPM' 85), Bucharest.
- Antonescu, P. and F. Petrescu, 1989. Contributions to kinetoplast dynamic analysis of distribution mechanisms. Bucharest.
- Antonescu, P., M. Oprean and F. Petrescu, 1985a. Contributions to the synthesis of oscillating cam mechanism and oscillating flat stick. Proceedings of the 4th International Symposium on Theory and Practice of Mechanisms, (TPM' 85), Bucharest.
- Antonescu, P., M. Oprean and F. Petrescu, 1985b. At the projection of the oscillate cams, there are mechanisms and distribution variables. Proceedings of the 5th Conference of Engines, Automobiles, Tractors and Agricultural Machines. I-Motors and Cars, (MMC' 85), Brasov.
- Antonescu, P., M. Oprean and F. Petrescu, 1986. Projection of the profile of the rotating camshaft acting on the oscillating plate with disengagement. Proceedings of the 3rd National Computer-aided Design Symposium in the Field of Mechanisms and Machine Parts (MMP' 86), Brasov.
- Antonescu, P., M. Oprean and F. Petrescu, 1987. Dynamic analysis of the cam distribution mechanisms. Proceedings of the 7th National Symposium on Industrial Robots and Space Mechanisms, (RSM' 87), Bucharest.

- Antonescu, P., M. Oprean and F. Petrescu, 1988. Analytical synthesis of Kurz profile, rotating the flat cam: Machine Building Review, no. 2. Bucharest.
- Antonescu, P., F. Petrescu and O. Antonescu, 1994. Contributions to the synthesis of the rotating cam mechanism and the tip of the balancing tip. Brasov.
- Antonescu, P., F. Petrescu and D. Antonescu, 1997. Geometrical synthesis of the rotary cam and balance tappet mechanism. Bucharest, 3: 23-23.
- Antonescu, P., F. Petrescu and O. Antonescu, 2000a. Contributions to the synthesis of the rotary disc-cam profile. Proceedings of the 8th International Conference on the Theory of Machines and Mechanisms, (TMM' 00), Liberec, Czech Republic, pp: 51-56.
- Antonescu, P., F. Petrescu and O. Antonescu, 2000b. Synthesis of the rotary cam profile with balance follower. Proceedings of the 8th Symposium on Mechanisms and Mechanical Transmissions, (MMT' 00), Timișoara, pp: 39-44.
- Antonescu, P., F. Petrescu and O. Antonescu, 2001. Contributions to the synthesis of mechanisms with rotary disc-cam. Proceedings of the 8th IFToMM International Symposium on Theory of Machines and Mechanisms, (TMM' 01), Bucharest, Romania, pp: 31-36.
- Aversa, R., R.V.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2017a. Nano-diamond hybrid materials for structural biomedical application. Am. J. Biochem. Biotechnol.
- Aversa, R., R.V. Petrescu, B. Akash, R.B. Bucinell and J.M. Corchado *et al.*, 2017b. Kinematics and forces to a new model forging manipulator. Am. J. Applied Sci., 14: 60-80.
- Aversa, R., R.V. Petrescu, A. Apicella, F.I.T. Petrescu and J.K. Calautit *et al.*, 2017c. Something about the V engines design. Am. J. Applied Sci., 14: 34-52.
- Aversa, R., D. Parcesepe, R.V.V. Petrescu, F. Berto and G. Chen *et al.*, 2017d. Process ability of bulk metallic glasses. Am. J. Applied Sci., 14: 294-301.
- Aversa, R., R.V.V. Petrescu, B. Akash, R.B. Bucinell and J.M. Corchado *et al.*, 2017e. Something about the balancing of thermal motors. Am. J. Eng. Applied Sci.
- Aversa, R., F.I.T. Petrescu, R.V. Petrescu and A. Apicella, 2016a. Biomimetic FEA bone modeling for customized hybrid biological prostheses development. Am. J. Applied Sci., 13: 1060-1067. DOI: 10.3844/ajassp.2016.1060.1067
- Aversa, R., D. Parcesepe, R.V. Petrescu, G. Chen and F.I.T. Petrescu *et al.*, 2016b. Glassy amorphous metal injection molded induced morphological defects. Am. J. Applied Sci., 13: 1476-1482.
- Aversa, R., R.V. Petrescu, F.I.T. Petrescu and A. Apicella, 2016c. Smart-factory: Optimization and process control of composite centrifuged pipes. Am. J. Applied Sci., 13: 1330-1341.
- Aversa, R., F. Tamburrino, R.V. Petrescu, F.I.T. Petrescu and M. Artur *et al.*, 2016d. Biomechanically inspired shape memory effect machines driven by muscle like acting NiTi alloys. Am. J. Applied Sci., 13: 1264-1271.
- Aversa, R., E.M. Buzea, R.V. Petrescu, A. Apicella and M. Neacsu *et al.*, 2016e. Present a mechatronic system having able to determine the concentration of carotenoids. Am. J. Eng. Applied Sci., 9: 1106-1111.
- Aversa, R., R.V. Petrescu, R. Sorrentino, F.I.T. Petrescu and A. Apicella, 2016f. Hybrid ceramo-polymeric nanocomposite for biomimetic scaffolds design and preparation. Am. J. Eng. Applied Sci., 9: 1096-1105.
- Aversa, R., V. Perrotta, R.V. Petrescu, C. Misiano and F.I.T. Petrescu *et al.*, 2016g. From structural colors to super-hydrophobicity and achromatic transparent protective coatings: Ion plating plasma assisted TiO₂ and SiO₂ nano-film deposition. Am. J. Eng. Applied Sci., 9: 1037-1045.
- Aversa, R., R.V. Petrescu, F.I.T. Petrescu and A. Apicella, 2016h. Biomimetic and evolutionary design driven innovation in sustainable products development. Am. J. Eng. Applied Sci., 9: 1027-1036.
- Aversa, R., R.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2016i. Mitochondria are naturally micro robots - a review. Am. J. Eng. Applied Sci., 9: 991-1002.
- Aversa, R., R.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2016j. We are addicted to vitamins C and E-A review. Am. J. Eng. Applied Sci., 9: 1003-1018.
- Aversa, R., R.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2016k. Physiologic human fluids and swelling behavior of hydrophilic biocompatible hybrid ceramo-polymeric materials. Am. J. Eng. Applied Sci., 9: 962-972.
- Aversa, R., R.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2016l. One can slow down the aging through antioxidants. Am. J. Eng. Applied Sci., 9: 1112-1126.
- Aversa, R., R.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2016m. About homeopathy or «Similia Similibus Curentur». Am. J. Eng. Applied Sci., 9: 1164-1172.
- Aversa, R., R.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2016n. The basic elements of life's. Am. J. Eng. Applied Sci., 9: 1189-1197.
- Aversa, R., F.I.T. Petrescu, R.V. Petrescu and A. Apicella, 2016o. Flexible stem trabecular prostheses. Am. J. Eng. Applied Sci., 9: 1213-1221.
- Berto, F., R.V.V. Petrescu and F.I.T. Petrescu, 2016a. A review of recent results on 3D effects. Am. J. Eng. Applied Sci., 9: 1247-1260.
- Berto, F., R.V.V. Petrescu and F.I.T. Petrescu, 2016b. Three-dimensional in bonded joints: A short review. Am. J. Eng. Applied Sci., 9: 1261-1268.
- Berto, F., A. Gagani, R.V.V. Petrescu and F.I.T. Petrescu, 2016c. Key-hole notches in isostatic graphite: A review of some recent data. Am. J. Eng. Applied Sci., 9: 1292-1300.

- Berto, F., A. Gagani, R. Aversa, R.V.V. Petrescu and A. Apicella *et al.*, 2016d. Multiaxial fatigue strength to notched specimens made of 40CrMoV13.9. *Am. J. Eng. Applied Sci.*, 9: 1269-1291.
- Cao, W., H. Ding, Z. Bin and C. Ziming, 2013. New structural representation and digital-analysis platform for symmetrical parallel mechanisms. *Int. J. Adv. Robotic Sys.* DOI: 10.5772/56380
- Comanescu, A., 2010. Bazele modelarii mecanismelor. 1st Edn., E. Politeh. Press, București, pp: 274.
- Dong, H., N. Giakoumidis, N. Figueroa and N. Mavridis, 2013. Approaching behaviour monitor and vibration indication in developing a General Moving Object Alarm System (GMOAS). *Int. J. Adv. Robotic Sys.* DOI: 10.5772/56586
- Franklin, D.J., 1930. Ingenious mechanisms for designers and inventors. 1st Edn., Industrial Press Inc., New York, ISBN-10: 0831110325, pp: 486.
- He, B., Z. Wang, Q. Li, H. Xie and R. Shen, 2013. An analytic method for the kinematics and dynamics of a multiple-backbone continuum robot. *IJARS.* DOI: 10.5772/54051
- Lee, B.J., 2013. Geometrical derivation of differential kinematics to calibrate model parameters of flexible manipulator. *Int. J. Adv. Robotic Sys.* DOI: 10.5772/55592
- Lin, W., B. Li, X. Yang and D. Zhang, 2013. Modelling and control of inverse dynamics for a 5-DOF parallel kinematic polishing machine. *Int. J. Adv. Robotic Sys.* DOI: 10.5772/54966
- Liu, H., W. Zhou, X. Lai and S. Zhu, 2013. An efficient inverse kinematic algorithm for a PUMA560-structured robot manipulator. *IJARS.* DOI: 10.5772/56403
- Mirsayar, M.M., V.A. Joneidi, R.V.V. Petrescu, F.I.T. Petrescu and F. Berto, 2017. Extended MTSN criterion for fracture analysis of soda lime glass. *Eng. Fracture Mechanics*, 178: 50-59. DOI: 10.1016/j.engfracmech.2017.04.018
- Padula, F. and V. Perdereau, 2013. An on-line path planner for industrial manipulators. *Int. J. Adv. Robotic Sys.* DOI: 10.5772/55063
- Perumaal, S. and N. Jawahar, 2013. Automated trajectory planner of industrial robot for pick-and-place task. *IJARS.* DOI: 10.5772/53940
- Petrescu, F. and R. Petrescu, 1995a. Contributions to optimization of the polynomial motion laws of the stick from the internal combustion engine distribution mechanism. *Bucharest*, 1: 249-256.
- Petrescu, F. and R. Petrescu, 1995b. Contributions to the synthesis of internal combustion engine distribution mechanisms. *Bucharest*, 1: 257-264.
- Petrescu, F. and R. Petrescu, 1997a. Dynamics of cam mechanisms (exemplified on the classic distribution mechanism). *Bucharest*, 3: 353-358.
- Petrescu, F. and R. Petrescu, 1997b. Contributions to the synthesis of the distribution mechanisms of internal combustion engines with a Cartesian coordinate method. *Bucharest*, 3: 359-364.
- Petrescu, F. and R. Petrescu, 1997c. Contributions to maximizing polynomial laws for the active stroke of the distribution mechanism from internal combustion engines. *Bucharest*, 3: 365-370.
- Petrescu, F. and R. Petrescu, 2000a. Synthesis of distribution mechanisms by the rectangular (Cartesian) coordinate method. *Proceedings of the 8th National Conference on International Participation (CIP' 00)*, Craiova, Romania, pp: 297-302.
- Petrescu, F. and R. Petrescu, 2000b. The design (synthesis) of cams using the polar coordinate method (triangle method). *Proceedings of the 8th National Conference on International Participation (CIP' 00)*, Craiova, Romania, pp: 291-296.
- Petrescu, F. and R. Petrescu, 2002a. Motion laws for cams. *Proceedings of the International Computer Assisted Design, National Symposium with Participation, (SNP' 02)*, Brașov, pp: 321-326.
- Petrescu, F. and R. Petrescu, 2002b. Camshaft dynamics elements. *Proceedings of the International Computer Assisted Design, National Participation Symposium, (SNP' 02)*, Brașov, pp: 327-332.
- Petrescu, F. and R. Petrescu, 2003. Some elements regarding the improvement of the engine design. *Proceedings of the National Symposium, Descriptive Geometry, Technical Graphics and Design, (GTD' 03)*, Brașov, pp: 353-358.
- Petrescu, F. and R. Petrescu, 2005a. The cam design for a better efficiency. *Proceedings of the International Conference on Engineering Graphics and Design, (EGD' 05)*, Bucharest, pp: 245-248.
- Petrescu, F. and R. Petrescu, 2005b. Contributions at the dynamics of cams. *Proceedings of the Ninth IFToMM International Symposium on Theory of Machines and Mechanisms, (TMM' 05)*, Bucharest, Romania, pp: 123-128.
- Petrescu, F. and R. Petrescu, 2005c. Determining the dynamic efficiency of cams. *Proceedings of the Ninth IFToMM International Symposium on Theory of Machines and Mechanisms, (TMM' 05)*, Bucharest, Romania, pp: 129-134.
- Petrescu, F. and R. Petrescu, 2005d. An original internal combustion engine. *Proceedings of the Ninth IFToMM International Symposium on Theory of Machines and Mechanisms, (TMM' 05)*, Bucharest, Romania, pp: 135-140.
- Petrescu, F. and R. Petrescu, 2005e. Determining the mechanical efficiency of Otto engine's mechanism. *Proceedings of the Ninth IFToMM International Symposium on Theory of Machines and Mechanisms, (TMM 05)*, Bucharest, Romania, pp: 141-146.

- Petrescu, F.I. and R.V. Petrescu, 2011. Mechanical Systems, Serial and Parallel (Romanian). 1st Edn., LULU Publisher, London, UK, pp: 124.
- Petrescu, F.I. and R.V. Petrescu, 2012a. Kinematics of the planar quadrilateral mechanism. *Engevista*, 14: 345-348.
- Petrescu, F.I. and R.V. Petrescu, 2012b. Mecatronica-Sisteme Seriale si paralele. 1st Edn., Create Space Publisher, USA, pp: 128.
- Petrescu, F.I. and R.V. Petrescu, 2013a. Cinematics of the 3R dyad. *Engevista*, 15: 118-124.
- Petrescu, F.I. and R.V. Petrescu, 2013b. Forces and efficiency of cams. *Int. Rev. Mechan. Eng.*
- Petrescu, F.I. and R.V. Petrescu, 2016a. Parallel moving mechanical systems kinematics. *ENGEVISTA*, 18: 455-491.
- Petrescu, F.I. and R.V. Petrescu, 2016b. Direct and inverse kinematics to the anthropomorphic robots. *ENGEVISTA*, 18: 109-124.
- Petrescu, F.I. and R.V. Petrescu, 2016c. Dynamic cinematic to a structure 2R. *Revista Geintec-Gestao Inovacao E Tecnologias*, 6: 3143-3154.
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017a. Yield at thermal engines internal combustion. *Am. J. Eng. Applied Sci.*, 10: 243-251.
- Petrescu, R.V., R. Aversa, B. Akash, B. Ronald and J. Corchado *et al.*, 2017b. Velocities and accelerations at the 3R mechatronic systems. *Am. J. Eng. Applied Sci.*, 10: 252-263.
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017c. Anthropomorphic solid structures n-r kinematics. *Am. J. Eng. Applied Sci.*, 10: 279-291.
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017d. Inverse kinematics at the anthropomorphic robots, by a trigonometric method. *Am. J. Eng. Applied Sci.*, 10: 394-411.
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017e. Forces at internal combustion engines. *Am. J. Eng. Applied Sci.*, 10: 382-393.
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017f. Gears-Part I. *Am. J. Eng. Applied Sci.*, 10: 457-472.
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017g. Gears-part II. *Am. J. Eng. Applied Sci.*, 10: 473-483.
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017h. Cam-gears forces, velocities, powers and efficiency. *Am. J. Eng. Applied Sci.*, 10: 491-505.
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017i. Dynamics of mechanisms with cams illustrated in the classical distribution. *Am. J. Eng. Applied Sci.*, 10: 551-567.
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017j. Testing by non-destructive control. *Am. J. Eng. Applied Sci.*, 10: 568-583.
- Petrescu, R.V., R. Aversa, A. Apicella and F.I.T. Petrescu, 2017k. Transportation engineering. *Am. J. Eng. Applied Sci.*, 10: 685-702.
- Petrescu, R.V., R. Aversa, S. Kozaitis, A. Apicella and F.I.T. Petrescu, 2017l. The quality of transport and environmental protection, part I. *Am. J. Eng. Applied Sci.*, 10: 738-755.
- Petrescu, R.V., R. Aversa, A. Apicella and F.I. Petrescu, 2016. Future medicine services robotics. *Am. J. Eng. Applied Sci.*, 9: 1062-1087.
- Petrescu, F.I., B. Grecu, A. Comanescu and R.V. Petrescu, 2009. Some mechanical design elements. *Proceeding of the International Conference on Computational Mechanics and Virtual Engineering, (MVE' 09), Braşov*, pp: 520-525.
- Petrescu, F.I., 2011. *Teoria Mecanismelor si a Masinilor: Curs Si Aplicatii*. 1st Edn., CreateSpace Independent Publishing Platform. ISBN-10: 1468015826. pp: 432.
- Petrescu, F.I.T., 2015a. Geometrical synthesis of the distribution mechanisms. *Am. J. Eng. Applied Sci.*, 8: 63-81.
- Petrescu, F.I.T., 2015b. Machine motion equations at the internal combustion heat engines. *Am. J. Eng. Applied Sci.*, 8: 127-137.