

Original Research Paper

The Dynamics of the Planar Cinematic Balanced Chain at the Plan Module 3R

¹Relly Victoria Petrescu, ²Raffaella Aversa,
²Antonio Apicella and ¹Florian Ion Tiberiu Petrescu

¹ARoTMM-IFToMM, Bucharest Polytechnic University, Bucharest, (CE), Romania

²Department of Architecture and Industrial Design, Advanced Material Lab,
Second University of Naples, 81031 Aversa (CE), Italy

Article history

Received: 12-01-2018

Revised: 16-01-2018

Accepted: 22-01-2018

Corresponding Author:

Florian Ion Tiberiu Petrescu
ARoTMM-IFToMM, Bucharest
Polytechnic University,
Bucharest, (CE), Romania
E-mail: scipub02@gmail.com

Abstract: In some previous papers, the mechatronic module 3R, plan, is a basic module on which the complete, geometric, cinematic, dynamic calculation of the anthropomorphic robots, the most used today's industrial robots, is built. The importance of the study of anthropomorphic robots has also been signaled, being today the most widespread robots worldwide, due to its simple design, construction, implementation, operation and maintenance. In addition, anthropomorphic systems are simpler from a technological and cheaper point of view, performing a continuous, demanding, repetitive work without any major maintenance problems. The basic module of these robots was also presented geometrically, cinematically, of the forces, of its total static balancing and of the forces that arise within or after balancing. In the present paper, we want to highlight the dynamics of the already statically balanced total module. It has been presented in other works and studied matrix spatially, or more simply in a plan, but in this case, it is necessary to move from the working plane to the real space, or vice versa, passage that we will present in this study. In the basic plan module already presented in other geometric and cinematic works, we want to highlight some dynamic features such as static balancing, total balancing and determination of the strength of the module after balancing. Through a total static balancing, balancing the gravitational forces and moments generated by the forces of gravity is achieved, balancing the forces of inertia and the moments (couples) generated by the presence of inertial forces (not to be confused with the inertial moments of the mechanism, which appear separately from the other forces, being part of the inertial torsion of a mechanism and depending on both the inertial masses of the mechanism and its angular accelerations. Balancing the mechanism can be done through various methods. Partial balancing is achieved almost in all cases where the actuators (electric drive motors) are fitted with a mechanical reduction, a mechanical transmission, a sprocket, spiral gear, spool screw type. This results in a "forced" drive balancing from the transmission, which makes the operation of the assembly to be correct but rigid and with mechanical shocks. Such balancing is not possible when the actuators directly actuate the elements of the kinematic chain without using mechanical reducers.

Keywords: Anthropomorphic Mechatronic Systems, Robots, Total Static Balancing, Kinetostatics, Dynamics

Introduction

A In some previous papers, the mechatronic module 3R, plan, is a basic module on which the complete, geometric, cinematic, dynamic calculation of the anthropomorphic robots, the most used today's industrial robots, is built. The importance of the study of anthropomorphic robots has also been signaled, being today the most widespread robots worldwide, due to its simple design, construction, implementation, operation and maintenance. In addition, anthropomorphic systems are simpler from a technological and cheaper point of view, performing a continuous, demanding, repetitive work without any major maintenance problems. The basic module of these robots was also presented geometrically, cinematically, of the forces, of its total static balancing and of the forces that arise within or after balancing. In the present paper we want to highlight the dynamics of the already statically balanced total module. It has been presented in other works and studied matrix spatially, or more simply in a plan, but in this case, it is necessary to move from the working plane to the real space, or vice versa, passage that we will present in this study. In the basic plan module already presented in other geometric and cinematic works, we want to highlight some dynamic features such as static balancing, total balancing and determination of the strength of the module after balancing. Through a total static balancing, balancing the gravitational forces and moments generated by the forces of gravity is achieved, balancing the forces of inertia and the moments (couples) generated by the presence of inertial forces (not to be confused with the inertial moments of the mechanism, which appear separately from the other forces, being part of the inertial torsion of a mechanism and depending on both the inertial masses of the mechanism and its angular accelerations. Balancing the mechanism can be done through various methods. Partial balancing is achieved almost in all cases where the actuators (electric drive motors) are fitted with a mechanical reduction, a mechanical transmission, a sprocket, spiral gear, spool screw type. This results in a "forced" drive balancing from the transmission, which makes the operation of the assembly to be correct but rigid and with mechanical shocks. Such balancing is not possible when the actuators directly actuate the elements of the kinematic chain without using mechanical reducers (Antonescu and Petrescu, 1985; 1989; Antonescu *et al.*, 1985a; 1985b; 1986; 1987; 1988; 1994; 1997; 2000a; 2000b; 2001; Aversa *et al.*, 2017a; 2017b; 2017c; 2017d; 2017e; 2016a; 2016b; 2016c; 2016d; 2016e; 2016f; 2016g; 2016h; 2016i; 2016j; 2016k; 2016l; 2016m; 2016n; 2016o; Berto *et al.*, 2016a; 2016b; 2016c; 2016d; Cao *et al.*, 2013; Dong *et al.*, 2013; Comanescu, 2010; Franklin, 1930; He *et al.*, 2013; Lee,

2013; Lin *et al.*, 2013; Liu *et al.*, 2013; Mirsayar *et al.*, 2017; Padula and Perdereau, 2013; Perumaal and Jawahar, 2013; Petrescu, 2011; 2015a; 2015b; Petrescu and Petrescu, 1995a; 1995b; 1997a; 1997b; 1997c; 2000a; 2000b; 2002a; 2002b; 2003; 2005a; 2005b; 2005c; 2005d; 2005e; 2011; 2012a; 2012b; 2013a; 2013b; 2016a; 2016; 2016c; Petrescu *et al.*, 2009; 2016; 2017a; 2017b; 2017c; 2017d; 2017e; 2017f; 2017g; 2017h; 2017i; 2017j; 2017k; 2017l; 2017m; 2017n; 2017o; 2017p; 2017q; 2017r; 2017s; 2017t; 2017u; 2017v; 2017w; 2017x; 2017y; 2017z; 2017aa; 2017ab; 2017ac; 2017ad; 2017ae).

Shows the kinematic diagram of the planar chain and Fig. 2 shows the kinematic scheme of the space chain.

The mechanism in Fig. 1 (planar cinematic chain) must be balanced to have a normal operation.

Through a total static balancing, balancing the gravitational forces and moments generated by the forces of gravity is achieved, balancing the forces of inertia and the moments (couples) generated by the presence of inertial forces (not to be confused with the inertial moments of the mechanism, which appear separately from the other forces, being part of the inertial torsion of a mechanism and depending on both the inertial masses of the mechanism and its angular accelerations.

Balancing the mechanism can be done through various methods.

Partial balancing is achieved almost in all cases where the actuators (electric drive motors) are fitted with a mechanical reduction, a mechanical transmission, a sprocket, spiral gear, spool screw type.

Such a reducer called the unisens (the movement allowed by it is a two-way rotation, but the transmission of the force and the motor moment can only be done in one direction, from the spindle to the worm gear, vice versa from the worm gear to the screw the force can not be transmitted and the movement is not possible by blocking the mechanism, which makes it apt to transmit the movement from the wheel of a vehicle to its wheels in the steering mechanism, not allowing the wheel forces due to the unevenness of the ground, to be transmitted to the steering wheel and implicitly to the driver, or this mechanism is suitable for mechanical meters so that they do not twist and vice versa etc.) can balance the transmission by letting the forces and motor moments unfold, but not allowing the kinematic elements to influence the movement through their forces of weight and inertia.

This results in a "forced" drive balancing from the transmission, which makes the operation of the assembly to be correct but rigid and with mechanical shocks.

Such balancing is not possible when the actuators directly actuate the elements of the kinematic chain without using mechanical reducers.

It is necessary in this situation for a real, permanent balancing.

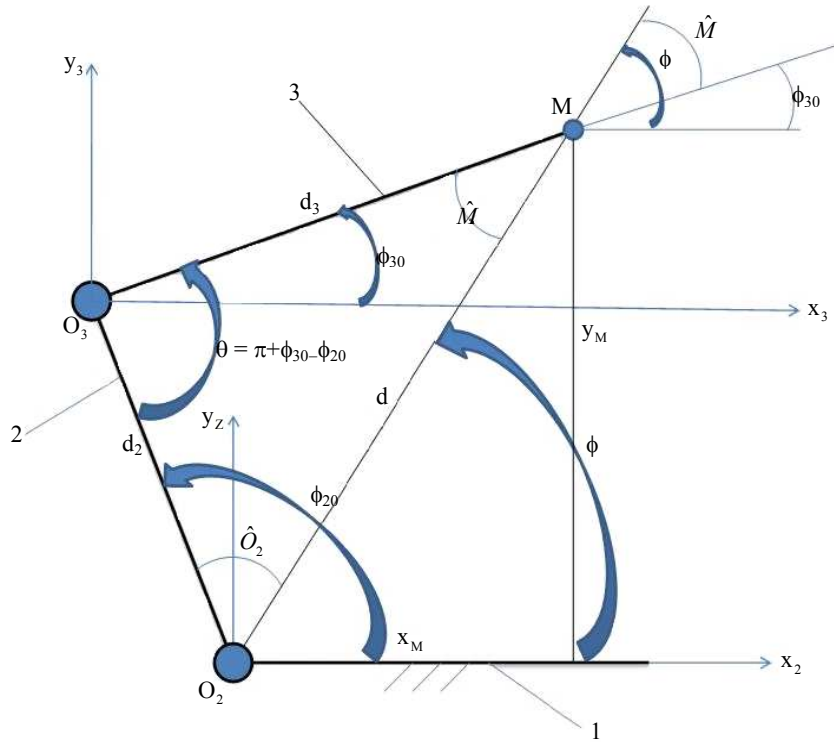


Fig. 1: The kinematic scheme of the plan chain

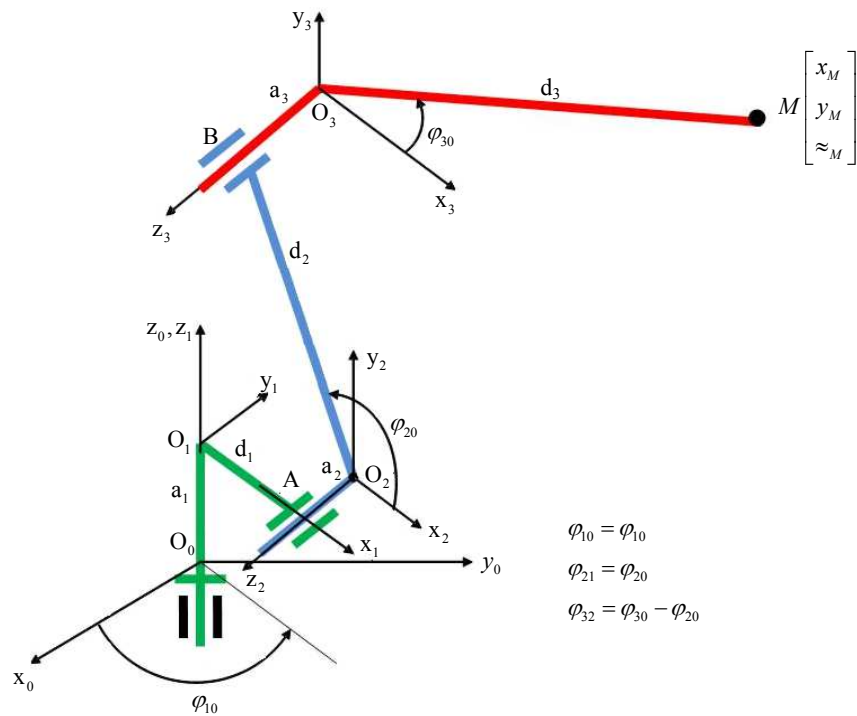


Fig. 2: The kinematic scheme of the spatial chain

In addition, in situations where hypoid reducers are used, it is also good to have a permanent, permanent

static balancing that achieves a normal, quiet operation of the mechanism and the whole assembly.

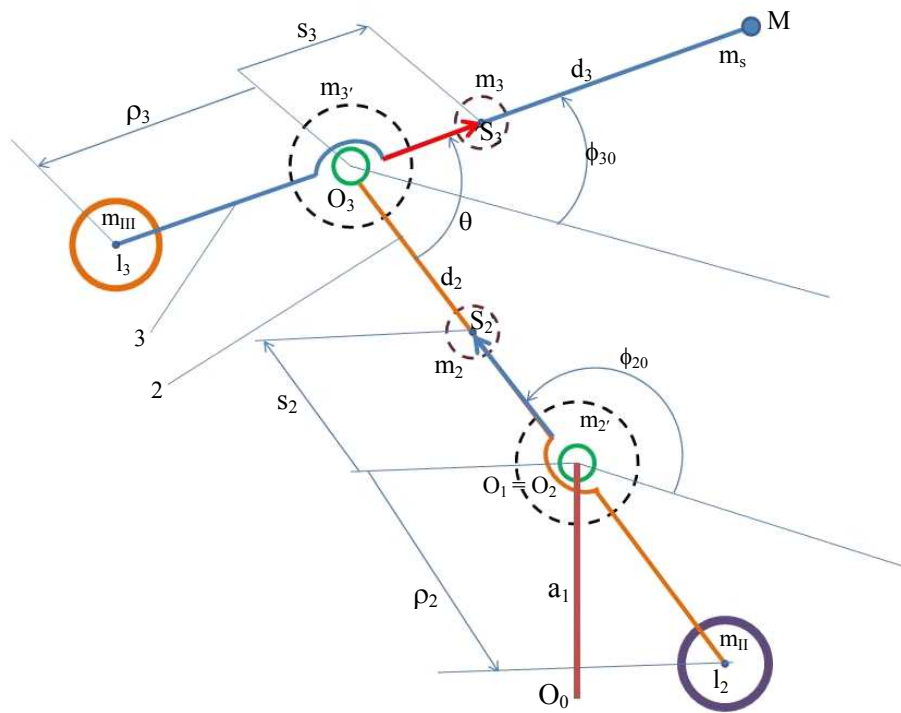


Fig. 3: Balancing the plan cinematic chain

As has already been shown, by balancing the static totality of a mobile cinematic chain, it is possible to balance the weight forces and couples produced by them, as well as balancing the inertial forces and the couples produced by them, but not balancing the moment of inertia.

Arcing balancing methods generally did not work very well, the springs having to be very well calibrated, so that the elastic forces realized (stored) by them are neither too small (insufficient balancing) nor too large (because prematurely kinematic elements and couplers and also greatly forces actuators).

The most used method is the classic one, with additional counterweight masses, similar to traditional folk fountains.

Total balancing of the open robotic kinematic chain is shown in Fig. 3.

Materials and Methods

From the previous works, we observe the two dynamical relationships that generate the necessary motor moments (actuators) from the kinetostatic system, which are connected together in the dynamic system (1):

These relationships necessary in studying the dynamics of the planar cinematic chain can be obtained directly by another method, using Lagrange differential equations of the second type and preserving the kinetic energy of the mechanism.

This method is more direct compared to the cinetostatic study, but has the disadvantage that it no longer determines the loads (reactions, inner forces) from the kinematic couples of the studied chain, necessary for the organological calculation of the resistance of the materials to the stresses, by choosing some dimensions (thicknesses or diameters) of the kinematic elements 2 and 3 and of the coupling links:

$$\begin{cases} M_{m_2} = J_{O_2}^* \cdot \varepsilon_2 \\ M_{m_3} = J_{O_3}^* \cdot \varepsilon_3 \\ M_{m_2} = (m_2 \cdot s_2^2 + m_{II} \cdot \rho_2^2 + m_3 \cdot d_2^2) \cdot \ddot{\phi}_{20} \\ M_{m_3} = (m_s \cdot d_3^2 + m_3 \cdot s_3^2 + m_{III} \cdot \rho_3^2) \cdot \ddot{\phi}_{30} \end{cases} \quad (1)$$

After balancing, the center of gravity of element 3 moves from point S_3 to mobile O_3 (Fig. 4) and the mass of element 3 increases from m_3 to m_3' ; the center of gravity of element 2 moves from point S_2 to fixed O_2

joint, while the final mass of element 2 concentrated in O_2 increases to m_2 .

First, we determine the speeds of the final weight centers, i.e., the linear and angular velocities in the two O_2 and O_3 joints (relations 2).

So the linear velocities (the components or the scaling projections on the x and y -axes) of the two joints are determined, but also the angular velocities of the two elements considered concentrated each around the respective joint according to Fig. 4:

$$\begin{cases} \dot{x}_{O_2} = 0; \dot{y}_{O_2} = 0; \dot{\phi}_{20} \equiv \omega_2 \equiv \omega_2 \\ \dot{x}_{O_3} = -d_2 \cdot \sin \phi_{20} \cdot \omega_2; \dot{y}_{O_3} = d_2 \cdot \cos \phi_{20} \cdot \omega_2; \dot{\phi}_{30} \equiv \omega_3 \equiv \omega_3 \end{cases} \quad (2)$$

For speeds, it is necessary to determine the mass or mechanical moments of inertia, which in order not to be confused with the moments of inertia, should be called inertial masses or masses of inertia, representing the inertial mass of each element and as the mass of each element generates linear amplification of the element's inertial force (linear) of the element (useful in the dynamic study) and the inertial mass of each element generates by the angular acceleration the moment of inertia of the respective

element considered concentrated around the center of gravity of the element.

Inertial masses are determined on elements around an axis of the respective element at a certain point, being generally variable on the respective element depending on the point around which it is determined. Generally, we are interested in the inertial mass (mass moment of inertia) in the center of gravity of the element, determined around the axis of rotation (Oz).

The classical notation of inertial masses (of mass or mechanical inertia moments) is J , in order to differentiate such resistance moments of resistance, denoted by I , used in the material resistance calculations.

There is a relationship between them.

Unfortunately, many specialists today mark moments of mass inertia with I as well as resistance.

For mass concentrates, the mass (mechanical) inertia determined in relation to an axis in the center of gravity is calculated by summing the products between each concentrated mass and the square of the distance from it to the point where we want to determine the mass inertia moment in our case the center of gravity of the element.

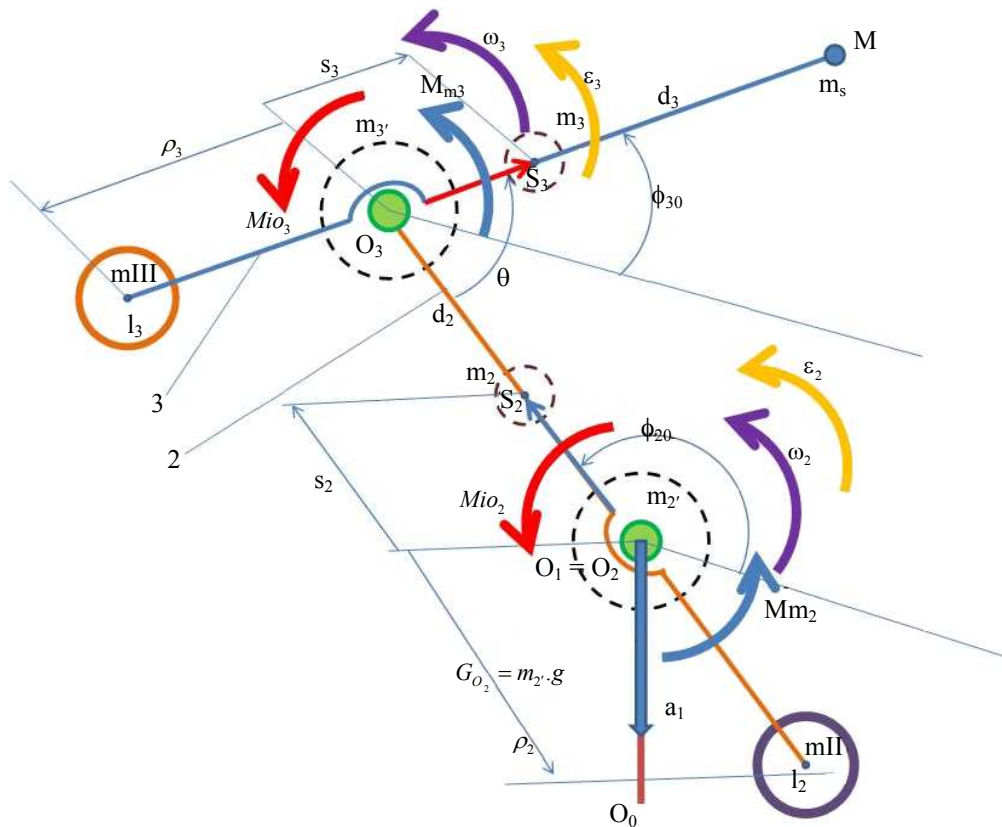


Fig. 4: Dynamics of balanced plan cinematic chain

For element 3, the momentum of mass or mechanical inertia (inertial mass) is determined by the relationship (3):

$$J_{O_3} = m_s \cdot d_3^2 + m_3 \cdot s_3^2 + m_{III} \cdot \rho_3^2 \quad (3)$$

Thus, the mass of load m_s endured by endeffactor M with the distance d_3 from the endeffector to the center of gravity of the O_3 element is multiplied by square and is summed up with the product of the mass of the element 3 and the square of the distance from the center of mass to the O_3 joint, also adds the additional mass m_{III} of the element 3 multiplied by the square of the distance from the point I_3 to the movable joint O_3 .

For element 2, the mass (mechanical) inertia moment around the end center of gravity of element 2 (fixed joint O_3) is determined using the relationship (4):

$$J_{O_2} = m_2 \cdot s_2^2 + m_{II} \cdot \rho_2^2 \quad (4)$$

Then determine the kinetic energy of the mechanism (the planar kinematic chain) with the help of relations (5):

$$\left\{ \begin{aligned} E &= \frac{1}{2} \cdot J_{O_2} \cdot \omega_2^2 + \frac{1}{2} \cdot J_{O_3} \cdot \omega_3^2 + \frac{1}{2} \cdot m_3 \cdot \dot{x}_{O_3}^2 + \frac{1}{2} \cdot m_3 \cdot \dot{y}_{O_3}^2 \\ &= \frac{1}{2} \cdot J_{O_2} \cdot \omega_2^2 + \frac{1}{2} \cdot J_{O_3} \cdot \omega_3^2 + \frac{1}{2} \cdot m_3 \cdot d_2^2 \cdot \omega_2^2 \\ &= \frac{1}{2} \cdot J_{O_3} \cdot \omega_3^2 + \frac{1}{2} \cdot \omega_2^2 \cdot (J_{O_2} + m_3 \cdot d_2^2) \\ &= \frac{1}{2} \cdot J_{O_3} \cdot \omega_3^2 + \frac{1}{2} \cdot J_{O_2}^* \cdot \omega_2^2 \\ J_{O_2}^* &= J_{O_2} + m_3 \cdot d_2^2 \end{aligned} \right. \quad (5)$$

The equation of the kinetic energy of the balanced planar chain cinematic chain is simplified by the final relation (6):

$$E = \frac{1}{2} \cdot J_{O_3} \cdot \omega_3^2 + \frac{1}{2} \cdot J_{O_2}^* \cdot \omega_2^2 \quad (6)$$

The second Lagrange differential equations are used (relations 7):

$$\left\{ \begin{aligned} \frac{d}{dt} \left(\frac{\partial E}{\partial \dot{q}_k} \right) - \frac{\partial E}{\partial q_k} &= Q_k \quad \text{cu } k = 2, 3 \\ \frac{d}{dt} \left(\frac{\partial E}{\partial \dot{q}_2} \right) - \frac{\partial E}{\partial q_2} &= Q_2 \\ \frac{d}{dt} \left(\frac{\partial E}{\partial \dot{q}_3} \right) - \frac{\partial E}{\partial q_3} &= Q_3 \end{aligned} \right. \quad (7)$$

Results

As the kinetic energy in this case does not directly depend on the kinematic parameters of positions q_2 and q_3 represented by the position angles φ_{20} and φ_{30} , Lagrange simplified formulas (8) can be used:

$$\left\{ \begin{aligned} \frac{d}{dt} \left(\frac{\partial E}{\partial \dot{q}_k} \right) &= Q_k \quad \text{cu } k = 2, 3 \\ \frac{d}{dt} \left(\frac{\partial E}{\partial \dot{q}_2} \right) &= Q_2 \Rightarrow \frac{d}{dt} \left(\frac{\partial E}{\partial \omega_2} \right) = M_{m_2} \\ \frac{d}{dt} \left(\frac{\partial E}{\partial \dot{q}_3} \right) &= Q_3 \Rightarrow \frac{d}{dt} \left(\frac{\partial E}{\partial \omega_3} \right) = M_{m_3} \end{aligned} \right. \quad (8)$$

By replacing the partial derivatives and deriving from time, the system (8) takes the form (9):

$$\left\{ \begin{aligned} \frac{\partial E}{\partial \omega_2} &= J_{O_2}^* \cdot \omega_2 \Rightarrow \frac{d}{dt} \left(\frac{\partial E}{\partial \omega_2} \right) = J_{O_2}^* \cdot \varepsilon_2 \\ &\Rightarrow J_{O_2}^* \cdot \varepsilon_2 = M_{m_2} \\ \frac{\partial E}{\partial \omega_3} &= J_{O_3} \cdot \omega_3 \Rightarrow \frac{d}{dt} \left(\frac{\partial E}{\partial \omega_3} \right) = J_{O_3} \cdot \varepsilon_3 \\ &\Rightarrow J_{O_3} \cdot \varepsilon_3 = M_{m_3} \\ J_{O_2}^* \cdot \varepsilon_2 &= M_{m_2} \\ J_{O_3} \cdot \varepsilon_3 &= M_{m_3} \\ J_{O_2}^* &= m_2 \cdot s_2^2 + m_{II} \cdot \rho_2^2 + m_3 \cdot d_2^2 \\ J_{O_3} &= m_s \cdot d_3^2 + m_3 \cdot s_3^2 + m_{III} \cdot \rho_3^2 \\ M_{m_2} &= (m_2 \cdot s_2^2 + m_{II} \cdot \rho_2^2 + m_3 \cdot d_2^2) \cdot \varepsilon_2 \\ M_{m_3} &= (m_s \cdot d_3^2 + m_3 \cdot s_3^2 + m_{III} \cdot \rho_3^2) \cdot \varepsilon_3 \end{aligned} \right. \quad (9)$$

Discussion

The mechanism in Fig. 1 (planar cinematic chain) must be balanced to have a normal operation.

Through a total static balancing, balancing the gravitational forces and moments generated by the forces of gravity is achieved, balancing the forces of inertia and the moments (couples) generated by the presence of inertial forces (not to be confused with the inertial moments of the mechanism, which appear separately from the other forces, being part of the inertial torsion of a mechanism and depending on both the inertial masses of the mechanism and its angular accelerations.

Balancing the mechanism can be done through various methods.

Partial balancing is achieved almost in all cases where the actuators (electric drive motors) are fitted with a mechanical reduction, a mechanical transmission, a sprocket, spiral gear, spool screw type.

Such a reducer called the unisens (the movement allowed by it is a two-way rotation, but the transmission of the force and the motor moment can only be done in one direction, from the spindle to the worm gear, vice versa from the worm gear to the screw the force can not be transmitted and the movement is not possible by blocking the mechanism, which makes it apt to transmit the movement from the wheel of a vehicle to its wheels in the steering mechanism, not allowing the wheel forces due to the unevenness of the ground, to be transmitted to the steering wheel and implicitly to the driver, or this mechanism is suitable for mechanical meters so that they do not twist and vice versa etc.) can balance the transmission by letting the forces and motor moments unfold, but not allowing the kinematic elements to influence the movement through their forces of weight and inertia.

This results in a "forced" drive balancing from the transmission, which makes the operation of the assembly to be correct but rigid and with mechanical shocks.

Such balancing is not possible when the actuators directly actuate the elements of the kinematic chain without using mechanical reducers.

It is necessary in this situation for a real, permanent balancing.

In addition, in situations where hypoid reducers are used, it is also good to have a permanent, permanent static balancing that achieves a normal, quiet operation of the mechanism and the whole assembly.

As has already been shown, by balancing the static totality of a mobile cinematic chain, it is possible to balance the weight forces and couples produced by them, as well as balancing the inertial forces and the couples produced by them, but not balancing the moment of inertia.

Arcing balancing methods generally did not work very well, the springs having to be very well calibrated, so that the elastic forces realized (stored) by them are neither too small (insufficient balancing) nor too large (because prematurely kinematic elements and couplers and also greatly forces actuators).

The most used method is the classic one, with additional counterweight masses, similar to traditional folk fountains.

Total balancing of the open robotic kinematic chain is shown in Fig. 3.

From the previous works, we observe the two dynamical relationships that generate the necessary motor moments (actuators) from the kinetostatic system, which are connected together in the dynamic system (1).

These relationships necessary in studying the dynamics of the planar cinematic chain can be obtained directly by another method, using Lagrange differential equations of the second type and preserving the kinetic energy of the mechanism.

This method is more direct compared to the cinetostatic study, but has the disadvantage that it no longer determines the loads (reactions, inner forces) from the kinematic couples of the studied chain, necessary for the organological calculation of the resistance of the materials to the stresses, by choosing some dimensions (thicknesses or diameters) of the kinematic elements 2 and 3 and of the coupling links.

After balancing, the center of gravity of element 3 moves from point S_3 to mobile O_3 (Fig. 4) and the mass of element 3 increases from m_3 to m_3' ; the center of gravity of element 2 moves from point S_2 to fixed O_2 joint, while the final mass of element 2 concentrated in O_2 increases to m_2 .

First, we determine the speeds of the final weight centers, i.e., the linear and angular velocities in the two O_2 and O_3 joints (relations 2).

So the linear velocities (the components or the scaling projections on the x and y -axes) of the two joints are determined, but also the angular velocities of the two elements considered concentrated each around the respective joint according to Fig. 4.

For speeds, it is necessary to determine the mass or mechanical moments of inertia, which in order not to be confused with the moments of inertia, should be called inertial masses or masses of inertia, representing the inertial mass of each element and as the mass of each element generates linear amplification of the element's inertial force (linear) of the element (useful in the dynamic study) and the inertial mass of each element generates by the angular acceleration the moment of inertia of the respective element considered concentrated around the center of gravity of the element.

Inertial masses are determined on elements around an axis of the respective element at a certain point, being generally variable on the respective element depending on the point around which it is determined. Generally, we are interested in the inertial mass (mass moment of inertia) in the center of gravity of the element, determined around the axis of rotation (Oz).

The classical notation of inertial masses (of mass or mechanical inertia moments) is J , in order to differentiate such resistance moments of resistance, denoted by I , used in the material resistance calculations.

There is a relationship between them.

Unfortunately, many specialists today mark moments of mass inertia with I as well as resistance.

For mass concentrates, the mass (mechanical) inertia determined in relation to an axis in the center of gravity is calculated by summing the products between each concentrated mass and the square of the distance from it to the point where we want to determine the mass inertia moment in our case the center of gravity of the element.

For element 3, the momentum of mass or mechanical inertia (inertial mass) is determined by the relationship (3).

Then determine the kinetic energy of the mechanism (the planar kinematic chain) with the help of relations (5). The equation of the kinetic energy of the balanced planar chain cinematic chain is simplified by the final relation (6).

The second Lagrange differential equations are used (relations 7).

As the kinetic energy in this case does not directly depend on the kinematic parameters of positions q_2 and q_3 represented by the position angles φ_{20} and φ_{30} , Lagrange simplified formulas (8) can be used.

Conclusion

In some previous papers, the mechatronic module 3R, plan, is a basic module on which the complete, geometric, cinematic, dynamic calculation of the anthropomorphic robots, the most used today's industrial robots, is built.

The importance of the study of anthropomorphic robots has also been signaled, being today the most widespread robots worldwide, due to its simple design, construction, implementation, operation and maintenance.

In addition, anthropomorphic systems are simpler from a technological and cheaper point of view, performing a continuous, demanding, repetitive work without any major maintenance problems.

The basic module of these robots was also presented geometrically, cinematically, of the forces, of its total static balancing and of the forces that arise within or after balancing. In the present paper, we want to highlight the dynamics of the already statically balanced total module.

It has been presented in other works and studied matrix spatially, or more simply in a plan, but in this case, it is necessary to move from the working plane to the real space, or vice versa, passage that we will present in this study. In the basic plan module already presented in other geometric and cinematic works, we want to highlight some dynamic features such as static balancing, total balancing and determination of the strength of the module after balancing.

Through a total static balancing, balancing the gravitational forces and moments generated by the forces of gravity is achieved, balancing the forces of inertia and the moments (couples) generated by the presence of inertial forces (not to be confused with the inertial moments of the mechanism, which appear separately from the other forces, being part of the inertial torsion of a mechanism and depending on both the inertial masses of the mechanism and its angular accelerations. Balancing the mechanism can be done through various methods.

Partial balancing is achieved almost in all cases where the actuators (electric drive motors) are fitted with a mechanical reduction, a mechanical transmission, a sprocket, spiral gear, spool screw type.

This results in a "forced" drive balancing from the transmission, which makes the operation of the assembly to be correct but rigid and with mechanical shocks. Such balancing is not possible when the actuators directly actuate the elements of the kinematic chain without using mechanical reducers.

Acknowledgement

This text was acknowledged and appreciated by Dr. Veturia CHIROIU Honoric member of Technical Sciences Academy of Romania (ASTR) PhD supervisor in Mechanical Engineering.

Funding Information

Research contract: 1-Research contract: Contract number 36-5-4D/1986 from 24IV1985, beneficiary CNST RO (Romanian National Center for Science and Technology) Improving dynamic mechanisms.

2-Contract research integration. 19-91-3 from 29.03.1991; Beneficiary: MIS; TOPIC: Research on designing mechanisms with bars, cams and gears, with application in industrial robots.

3-Contract research. GR 69/10.05.2007: NURC in 2762; theme 8: Dynamic analysis of mechanisms and manipulators with bars and gears.

4-Labor contract, no. 35/22.01.2013, the UPB, "Stand for reading performance parameters of kinematics and dynamic mechanisms, using inductive and incremental encoders, to a Mitsubishi Mechatronic System" "PN-II-IN-CI-2012-1-0389".

All these matters are copyrighted! Copyrights: 394-qodGnhhtej, from 17-02-2010 13:42:18; 463-vpstuCGsiy, from 20-03-2010 12:45:30; 631-sqfsgqvutm, from 24-05-2010 16:15:22; 933-CrDztEfqow, from 07-01-2011 13:37:52.

Author's Contributions

This section should state the contributions made by each author in the preparation, development and publication of this manuscript.

Ethics

Authors should address any ethical issues that may arise after the publication of this manuscript.

References

Antonescu, P. and F. Petrescu, 1985. An analytical method of synthesis of cam mechanism and flat stick. Proceedings of the 4th International Symposium on Theory and Practice of Mechanisms, (TPM' 89), Bucharest.

- Antonescu, P. and F. Petrescu, 1989. Contributions to kinetoplast dynamic analysis of distribution mechanisms. Bucharest.
- Antonescu, P., M. Oprean and F. Petrescu, 1985a. Contributions to the synthesis of oscillating cam mechanism and oscillating flat stick. Proceedings of the 4th International Symposium on Theory and Practice of Mechanisms, (TPM' 85), Bucharest.
- Antonescu, P., M. Oprean and F. Petrescu, 1985b. At the projection of the oscillate cams, there are mechanisms and distribution variables. Proceedings of the 5th Conference of Engines, Automobiles, Tractors and Agricultural Machines, (TAM' 58), I-motors and cars, Brasov.
- Antonescu, P., M. Oprean and F. Petrescu, 1986. Projection of the profile of the rotating camshaft acting on the oscillating plate with disengagement. Proceedings of the 3rd National Computer-aided Design Symposium in the field of Mechanisms and Machine Parts, (MMP' 86), Brasov.
- Antonescu, P., M. Oprean and F. Petrescu, 1987. Dynamic analysis of the cam distribution mechanisms. Proceedings of the 7th National Symposium on Industrial Robots and Space Mechanisms, (RSM' 87), Bucharest.
- Antonescu, P., M. Oprean and F. Petrescu, 1988. Analytical synthesis of Kurz profile, rotating the flat cam. Mach, Build. Rev.
- Antonescu, P., F. Petrescu and O. Antonescu, 1994. Contributions to the synthesis of the rotating cam mechanism and the tip of the balancing tip. Brasov.
- Antonescu, P., F. Petrescu and D. Antonescu, 1997. Geometrical synthesis of the rotary cam and balance tappet mechanism. Bucharest, 3: 23-23.
- Antonescu, P., F. Petrescu and O. Antonescu, 2000a. Contributions to the synthesis of the rotary disc-cam profile. Proceedings of the 8th International Conference on the Theory of Machines and Mechanisms, (TMM' 00), Liberec, Czech Republic, pp: 51-56.
- Antonescu, P., F. Petrescu and O. Antonescu, 2000b. Synthesis of the rotary cam profile with balance follower. Proceedings of the 8th Symposium on Mechanisms and Mechanical Transmissions, (MMT' 00), Timișoara, pp: 39-44.
- Antonescu, P., F. Petrescu and O. Antonescu, 2001. Contributions to the synthesis of mechanisms with rotary disc-cam. Proceedings of the 8th IFToMM International Symposium on Theory of Machines and Mechanisms, (TMM' 01), Bucharest, ROMANIA, pp: 31-36.
- Aversa, R., R.V.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2017a. Nano-diamond hybrid materials for structural biomedical application. Am. J. Biochem. Biotechnol., 13: 34-41.
DOI: 10.3844/ajbbsp.2017.34.41
- Aversa, R., R.V. Petrescu, B. Akash, R.B. Bucinell and J.M. Corchado *et al.*, 2017b. Kinematics and forces to a new model forging manipulator. Am. J. Applied Sci., 14: 60-80. DOI: 10.3844/ajassp.2017.60.80
- Aversa, R., R.V. Petrescu, A. Apicella, F.I.T. Petrescu and J.K. Calautit *et al.*, 2017c. Something about the V engines design. Am. J. Applied Sci., 14: 34-52. DOI: 10.3844/ajassp.2017.34.52
- Aversa, R., D. Parcesepe, R.V.V. Petrescu, F. Berto and G. Chen *et al.*, 2017d. Process ability of bulk metallic glasses. Am. J. Applied Sci., 14: 294-301. DOI: 10.3844/ajassp.2017.294.301
- Aversa, R., R.V.V. Petrescu, B. Akash, R.B. Bucinell and J.M. Corchado *et al.*, 2017e. Something about the balancing of thermal motors. Am. J. Eng. Applied Sci., 10: 200.217.
DOI: 10.3844/ajeassp.2017.200.217
- Aversa, R., F.I.T. Petrescu, R.V. Petrescu and A. Apicella, 2016a. Biomimetic FEA bone modeling for customized hybrid biological prostheses development. Am. J. Applied Sci., 13: 1060-1067. DOI: 10.3844/ajassp.2016.1060.1067
- Aversa, R., D. Parcesepe, R.V. Petrescu, G. Chen and F.I.T. Petrescu *et al.*, 2016b. Glassy amorphous metal injection molded induced morphological defects. Am. J. Applied Sci., 13: 1476-1482. DOI: 10.3844/ajassp.2016.1476.1482
- Aversa, R., R.V. Petrescu, F.I.T. Petrescu and A. Apicella, 2016c. Smart-factory: Optimization and process control of composite centrifuged pipes. Am. J. Applied Sci., 13: 1330-1341. DOI: 10.3844/ajassp.2016.1330.1341
- Aversa, R., F. Tamburrino, R.V. Petrescu, F.I.T. Petrescu and M. Artur *et al.*, 2016d. Biomechanically inspired shape memory effect machines driven by muscle like acting NiTi alloys. Am. J. Applied Sci., 13: 1264-1271. DOI: 10.3844/ajassp.2016.1264.1271
- Aversa, R., E.M. Buzea, R.V. Petrescu, A. Apicella and M. Neacsu *et al.*, 2016e. Present a mechatronic system having able to determine the concentration of carotenoids. Am. J. Eng. Applied Sci., 9: 1106-1111. DOI: 10.3844/ajeassp.2016.1106.1111
- Aversa, R., R.V. Petrescu, R. Sorrentino, F.I.T. Petrescu and A. Apicella, 2016f. Hybrid ceramo-polymeric nanocomposite for biomimetic scaffolds design and preparation. Am. J. Eng. Applied Sci., 9: 1096-1105. DOI: 10.3844/ajeassp.2016.1096.1105
- Aversa, R., V. Perrotta, R.V. Petrescu, C. Misiano and F.I.T. Petrescu *et al.*, 2016g. From structural colors to super-hydrophobicity and achromatic transparent protective coatings: Ion plating plasma assisted TiO₂ and SiO₂ nano-film deposition. Am. J. Eng. Applied Sci., 9: 1037-1045. DOI: 10.3844/ajeassp.2016.1037.1045

- Aversa, R., R.V. Petrescu, F.I.T. Petrescu and A. Apicella, 2016h. Biomimetic and evolutionary design driven innovation in sustainable products development. *Am. J. Eng. Applied Sci.*, 9: 1027-1036. DOI: 10.3844/ajeassp.2016.1027.1036
- Aversa, R., R.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2016i. Mitochondria are naturally micro robots - a review. *Am. J. Eng. Applied Sci.*, 9: 991-1002. DOI: 10.3844/ajeassp.2016.991.1002
- Aversa, R., R.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2016j. We are addicted to vitamins C and E-A review. *Am. J. Eng. Applied Sci.*, 9: 1003-1018. DOI: 10.3844/ajeassp.2016.1003.1018
- Aversa, R., R.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2016k. Physiologic human fluids and swelling behavior of hydrophilic biocompatible hybrid ceramo-polymeric materials. *Am. J. Eng. Applied Sci.*, 9: 962-972. DOI: 10.3844/ajeassp.2016.962.972
- Aversa, R., R.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2016l. One can slow down the aging through antioxidants. *Am. J. Eng. Applied Sci.*, 9: 1112-1126. DOI: 10.3844/ajeassp.2016.1112.1126
- Aversa, R., R.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2016m. About homeopathy or «Similia Similibus Curentur». *Am. J. Eng. Applied Sci.*, 9: 1164-1172. DOI: 10.3844/ajeassp.2016.1164.1172
- Aversa, R., R.V. Petrescu, A. Apicella and F.I.T. Petrescu, 2016n. The basic elements of life's. *Am. J. Eng. Applied Sci.*, 9: 1189-1197. DOI: 10.3844/ajeassp.2016.1189.1197
- Aversa, R., F.I.T. Petrescu, R.V. Petrescu and A. Apicella, 2016o. Flexible stem trabecular prostheses. *Am. J. Eng. Applied Sci.*, 9: 1213-1221. DOI: 10.3844/ajeassp.2016.1213.1221
- Berto, F., R.V.V. Petrescu and F.I.T. Petrescu, 2016a. A review of recent results on 3D effects. *Am. J. Eng. Applied Sci.*, 9: 1247-1260. DOI: 10.3844/ajeassp.2016.1247.1260
- Berto, F., R.V.V. Petrescu and F.I.T. Petrescu, 2016b. Three-dimensional in bonded joints: A short review. *Am. J. Eng. Applied Sci.*, 9: 1261-1268. DOI: 10.3844/ajeassp.2016.1261.1268
- Berto, F., A. Gagani, R.V.V. Petrescu and F.I.T. Petrescu, 2016c. Key-hole notches in isostatic graphite: A review of some recent data. *Am. J. Eng. Applied Sci.*, 9: 1292-1300. DOI: 10.3844/ajeassp.2016.1292.1300
- Berto, F., A. Gagani, R. Aversa, R.V.V. Petrescu and A. Apicella *et al.*, 2016d. Multiaxial fatigue strength to notched specimens made of 40CrMoV13.9. *Am. J. Eng. Applied Sci.*, 9: 1269-1291. DOI: 10.3844/ajeassp.2016.1269.1291
- Cao, W., H. Ding, Z. Bin and C. Ziming, 2013. New structural representation and digital-analysis platform for symmetrical parallel mechanisms. *Int. J. Adv. Robotic Sys.* DOI: 10.5772/56380
- Comanescu, A., 2010. Bazele Modelarii Mecanismelor. 1st Edn., E. Politeh, Press, București, pp: 274.
- Dong, H., N. Giakoumidis, N. Figueroa and N. Mavridis, 2013. Approaching behaviour monitor and vibration indication in developing a General Moving Object Alarm System (GMOAS). *Int. J. Adv. Robotic Sys.* DOI: 10.5772/56586
- Franklin, D.J., 1930. Ingenious Mechanisms for Designers and Inventors. 1st Edn., Industrial Press Publisher.
- He, B., Z. Wang, Q. Li, H. Xie and R. Shen, 2013. An analytic method for the kinematics and dynamics of a multiple-backbone continuum robot. *IJARS.* DOI: 10.5772/54051
- Lee, B.J., 2013. Geometrical derivation of differential kinematics to calibrate model parameters of flexible manipulator. *Int. J. Adv. Robotic Sys.* DOI: 10.5772/55592
- Lin, W., B. Li, X. Yang and D. Zhang, 2013. Modelling and control of inverse dynamics for a 5-DOF parallel kinematic polishing machine. *Int. J. Adv. Robotic Sys.* DOI: 10.5772/54966
- Liu, H., W. Zhou, X. Lai and S. Zhu, 2013. An efficient inverse kinematic algorithm for a PUMA560-structured robot manipulator. *IJARS.* DOI: 10.5772/56403
- Mirsayar, M.M., V.A. Joneidi, R.V.V. Petrescu, F.I.T. Petrescu and F. Berto, 2017. Extended MTSN criterion for fracture analysis of soda lime glass. *Eng. Fracture Mechan.*, 178: 50-59. DOI: 10.1016/j.engfracmech.2017.04.018
- Padula, F. and V. Perdureau, 2013. An on-line path planner for industrial manipulators. *Int. J. Adv. Robotic Sys.* DOI: 10.5772/55063
- Perumaal, S. and N. Jawahar, 2013. Automated trajectory planner of industrial robot for pick-and-place task. *IJARS.* DOI: 10.5772/53940
- Petrescu, F. and R. Petrescu, 1995a. Contributions to optimization of the polynomial motion laws of the stick from the internal combustion engine distribution mechanism. Bucharest, 1: 249-256.
- Petrescu, F. and R. Petrescu, 1995b. Contributions to the synthesis of internal combustion engine distribution mechanisms. Bucharest, 1: 257-264.
- Petrescu, F. and R. Petrescu, 1997a. Dynamics of cam mechanisms (exemplified on the classic distribution mechanism). Bucharest, 3: 353-358.
- Petrescu, F. and R. Petrescu, 1997b. Contributions to the synthesis of the distribution mechanisms of internal combustion engines with a Cartesian coordinate method. Bucharest, 3: 359-364.
- Petrescu, F. and R. Petrescu, 1997c. Contributions to maximizing polynomial laws for the active stroke of the distribution mechanism from internal combustion engines. Bucharest, 3: 365-370.

- Petrescu, F. and R. Petrescu, 2000a. Synthesis of distribution mechanisms by the rectangular (Cartesian) coordinate method. Proceedings of the 8th National Conference on International Participation (CIP' 00), Craiova, Romania, pp: 297-302.
- Petrescu, F. and R. Petrescu, 2000b. The design (synthesis) of cams using the polar coordinate method (triangle method). Proceedings of the 8th National Conference on International Participation (CIP' 00), Craiova, Romania, pp: 291-296.
- Petrescu, F. and R. Petrescu, 2002a. Motion laws for cams. Proceedings of the International Computer Assisted Design, National Symposium with Participation, (SNP' 02), Braşov, pp: 321-326.
- Petrescu, F. and R. Petrescu, 2002b. Camshaft dynamics elements. Proceedings of the International Computer Assisted Design, National Participation Symposium, (SNP' 02), Braşov, pp: 327-332.
- Petrescu, F. and R. Petrescu, 2003. Some elements regarding the improvement of the engine design. Proceedings of the National Symposium, Descriptive Geometry, Technical Graphics and Design, (GTD' 03), Braşov, pp: 353-358.
- Petrescu, F. and R. Petrescu, 2005a. The cam design for a better efficiency. Proceedings of the International Conference on Engineering Graphics and Design, (EGD' 05), Bucharest, pp: 245-248.
- Petrescu, F. and R. Petrescu, 2005b. Contributions at the dynamics of cams. Proceedings of the 9th IFToMM International Symposium on Theory of Machines and Mechanisms, (TMM' 05), Bucharest, Romania, pp: 123-128.
- Petrescu, F. and R. Petrescu, 2005c. Determining the dynamic efficiency of cams. Proceedings of the 9th IFToMM International Symposium on Theory of Machines and Mechanisms, (TMM' 05), Bucharest, Romania, pp: 129-134.
- Petrescu, F. and R. Petrescu, 2005d. An original internal combustion engine. Proceedings of the 9th IFToMM International Symposium on Theory of Machines and Mechanisms, (TMM' 05), Bucharest, Romania, pp: 135-140.
- Petrescu, F. and R. Petrescu, 2005e. Determining the mechanical efficiency of Otto engine's mechanism. Proceedings of the 9th IFToMM International Symposium on Theory of Machines and Mechanisms, (TMM 05), Bucharest, Romania, pp: 141-146.
- Petrescu, F.I. and R.V. Petrescu, 2011. Mechanical Systems, Serial and Parallel (Romanian). 1st Edn., LULU Publisher, London, UK, pp: 124.
- Petrescu, F.I. and R.V. Petrescu, 2012a. Kinematics of the planar quadrilateral mechanism. ENGEVISTA, 14: 345-348.
- Petrescu, F.I. and R.V. Petrescu, 2012b. Mecatronica-Sisteme Seriale si Paralele. 1st Edn., Create Space Publisher, USA, pp: 128.
- Petrescu, F.I. and R.V. Petrescu, 2013a. Cinematics of the 3R dyad. ENGEVISTA, 15: 118-124.
- Petrescu, F.I. and R.V. Petrescu, 2013b. Forces and efficiency of cams. Int. Rev. Mechanical Eng.
- Petrescu, F.I. and R.V. Petrescu, 2016a. Parallel moving mechanical systems kinematics. ENGEVISTA, 18: 455-491.
- Petrescu, F.I. and R.V. Petrescu, 2016b. Direct and inverse kinematics to the anthropomorphic robots. ENGEVISTA, 18: 109-124.
- Petrescu, F.I. and R.V. Petrescu, 2016c. Dynamic cinematic to a structure 2R. Revista Geintec-Gestao Inovacao E Tecnol., 6: 3143-3154.
- Petrescu, R.V., R. Aversa, A. Apicella and F.I. Petrescu, 2016. Future medicine services robotics. Am. J. Eng. Applied Sci., 9: 1062-1087. DOI: 10.3844/ajeassp.2016.1062.1087
- Petrescu, F.I., B. Grecu, A. Comanescu and R.V. Petrescu, 2009. Some mechanical design elements. Proceeding of the International Conference on Computational Mechanics and Virtual Engineering, (MVE' 09), Braşov, pp: 520-525.
- Petrescu, F.I., 2011. Teoria Mecanismelor si a Masinilor: Curs Si Aplicatii. 1st Edn., CreateSpace Independent Publishing Platform. ISBN-10: 1468015826. pp: 432.
- Petrescu, F.I.T., 2015a. Geometrical synthesis of the distribution mechanisms. Am. J. Eng. Applied Sci., 8: 63-81. DOI: 10.3844/ajeassp.2015.63.81
- Petrescu, F.I.T., 2015b. Machine motion equations at the internal combustion heat engines. Am. J. Eng. Applied Sci., 8: 127-137. DOI: 10.3844/ajeassp.2015.127.137
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017a. Yield at thermal engines internal combustion. Am. J. Eng. Applied Sci., 10: 243-251. DOI: 10.3844/ajeassp.2017.243.251
- Petrescu, R.V., R. Aversa, B. Akash, B. Ronald and J. Corchado *et al.*, 2017b. Velocities and accelerations at the 3R mechatronic systems. Am. J. Eng. Applied Sci., 10: 252-263. DOI: 10.3844/ajeassp.2017.252.263
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017c. Anthropomorphic solid structures n-r kinematics. Am. J. Eng. Applied Sci., 10: 279-291. DOI: 10.3844/ajeassp.2017.279.291
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017d. Inverse kinematics at the anthropomorphic robots, by a trigonometric method. Am. J. Eng. Applied Sci., 10: 394-411. DOI: 10.3844/ajeassp.2017.394.411
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017e. Forces at internal combustion engines. Am. J. Eng. Applied Sci., 10: 382-393. DOI: 10.3844/ajeassp.2017.382.393
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017f. Gears-Part I. Am. J. Eng. Applied Sci., 10: 457-472. DOI: 10.3844/ajeassp.2017.457.472

- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017g. Gears-part II. *Am. J. Eng. Applied Sci.*, 10: 473-483.
DOI: 10.3844/ajeassp.2017.473.483
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017h. Cam-gears forces, velocities, powers and efficiency. *Am. J. Eng. Applied Sci.*, 10: 491-505.
DOI: 10.3844/ajeassp.2017.491.505
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017i. Dynamics of mechanisms with cams illustrated in the classical distribution. *Am. J. Eng. Applied Sci.*, 10: 551-567.
DOI: 10.3844/ajeassp.2017.551.567
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017j. Testing by non-destructive control. *Am. J. Eng. Applied Sci.*, 10: 568-583.
DOI: 10.3844/ajeassp.2017.568.583
- Petrescu, R.V., R. Aversa, A. Apicella and F.I.T. Petrescu, 2017k. Transportation engineering. *Am. J. Eng. Applied Sci.*, 10: 685-702.
DOI: 10.3844/ajeassp.2017.685.702
- Petrescu, R.V., R. Aversa, S. Kozaitis, A. Apicella and F.I.T. Petrescu, 2017l. The quality of transport and environmental protection, part I. *Am. J. Eng. Applied Sci.*, 10: 738-755.
DOI: 10.3844/ajeassp.2017.738.755
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017m. Modern propulsions for aerospace-a review. *J. Aircraft Spacecraft Technol.*, 1: 1-8. DOI: 10.3844/jastsp.2017.1.8
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017n. Modern propulsions for aerospace-part II. *J. Aircraft Spacecraft Technol.*, 1: 9-17. DOI: 10.3844/jastsp.2017.9.17
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017o. History of aviation-a short review. *J. Aircraft Spacecraft Technol.*, 1: 30-49.
DOI: 10.3844/jastsp.2017.30.49
- Petrescu, R.V., R. Aversa, B. Akash, R. Bucinell and J. Corchado *et al.*, 2017p. Lockheed martin-a short review. *J. Aircraft Spacecraft Technol.*, 1: 50-68.
DOI: 10.3844/jastsp.2017.50.68
- Petrescu, R.V., R. Aversa, B. Akash, J. Corchado and F. Berto *et al.*, 2017q. Our universe. *J. Aircraft Spacecraft Technol.*, 1: 69-79.
DOI: 10.3844/jastsp.2017.69.79
- Petrescu, R.V., R. Aversa, B. Akash, J. Corchado and F. Berto *et al.*, 2017r. What is a UFO? *J. Aircraft Spacecraft Technol.*, 1: 80-90.
DOI: 10.3844/jastsp.2017.80.90
- Petrescu, R.V., R. Aversa, B. Akash, J. Corchado and F. Berto *et al.*, 2017s. About bell helicopter FCX-001 concept aircraft-a short review. *J. Aircraft Spacecraft Technol.*, 1: 91-96.
DOI: 10.3844/jastsp.2017.91.96
- Petrescu, R.V., R. Aversa, B. Akash, J. Corchado and F. Berto *et al.*, 2017t. Home at airbus. *J. Aircraft Spacecraft Technol.*, 1: 97-118.
DOI: 10.3844/jastsp.2017.97.118
- Petrescu, R.V., R. Aversa, B. Akash, J. Corchado and F. Berto *et al.*, 2017u. Airlander. *J. Aircraft Spacecraft Technol.*, 1: 119-148.
DOI: 10.3844/jastsp.2017.119.148
- Petrescu, R.V., R. Aversa, B. Akash, J. Corchado and F. Berto *et al.*, 2017v. When boeing is dreaming-a review. *J. Aircraft Spacecraft Technol.*, 1: 149-161.
DOI: 10.3844/jastsp.2017.149.161
- Petrescu, R.V., R. Aversa, B. Akash, J. Corchado and F. Berto *et al.*, 2017w. About Northrop Grumman. *J. Aircraft Spacecraft Technol.*, 1: 162-185.
DOI: 10.3844/jastsp.2017.162.185
- Petrescu, R.V., R. Aversa, B. Akash, J. Corchado and F. Berto *et al.*, 2017x. Some special aircraft. *J. Aircraft Spacecraft Technol.*, 1: 186-203.
DOI: 10.3844/jastsp.2017.186.203
- Petrescu, R.V., R. Aversa, B. Akash, J. Corchado and F. Berto *et al.*, 2017y. About helicopters. *J. Aircraft Spacecraft Technol.*, 1: 204-223.
DOI: 10.3844/jastsp.2017.204.223
- Petrescu, R.V., R. Aversa, B. Akash, F. Berto and A. Apicella *et al.*, 2017z. The modern flight. *J. Aircraft Spacecraft Technol.*, 1: 224-233.
DOI: 10.3844/jastsp.2017.224.233
- Petrescu, R.V., R. Aversa, B. Akash, F. Berto and A. Apicella *et al.*, 2017aa. Sustainable energy for aerospace vessels. *J. Aircraft Spacecraft Technol.*, 1: 234-240. DOI: 10.3844/jastsp.2017.234.240
- Petrescu, R.V., R. Aversa, B. Akash, F. Berto and A. Apicella *et al.*, 2017ab. Unmanned helicopters. *J. Aircraft Spacecraft Technol.*, 1: 241-248.
DOI: 10.3844/jastsp.2017.241.248
- Petrescu, R.V., R. Aversa, B. Akash, F. Berto and A. Apicella *et al.*, 2017ac. Project HARP. *J. Aircraft Spacecraft Technol.*, 1: 249-257.
DOI: 10.3844/jastsp.2017.249.257
- Petrescu, R.V., R. Aversa, B. Akash, F. Berto and A. Apicella *et al.*, 2017ad. Presentation of romanian engineers who contributed to the development of global aeronautics-part I. *J. Aircraft Spacecraft Technol.*, 1: 258-271.
DOI: 10.3844/jastsp.2017.258.271
- Petrescu, R.V., R. Aversa, B. Akash, F. Berto and A. Apicella *et al.*, 2017ae. A first-class ticket to the planet mars, please. *J. Aircraft Spacecraft Technol.*, 1: 272-281. DOI: 10.3844/jastsp.2017.272.281