

Original Research Paper

Gears-Part II

¹Relly Victoria V. Petrescu, ²Raffaella Aversa,
³Bilal Akash, ⁴Ronald B. Bucinell, ⁵Juan M. Corchado,
²Antonio Apicella and ¹Florian Ion T. Petrescu

¹ARoTMM-IFTToMM, Bucharest Polytechnic University, Bucharest, (CE), Romania

²Advanced Material Lab, Department of Architecture and Industrial Design,
Second University of Naples, 81031 Aversa (CE), Italy

³Dean of School of Graduate Studies and Research, American University of Ras Al Khaimah, UAE

⁴Union College, USA

⁵University of Salamanca, Spain

Article history

Received: 31-12-2016

Revised: 07-01-2017

Accepted: 09-05-2017

Corresponding Author:
Florian Ion T. Petrescu
ARoTMM-IFTToMM,
Bucharest Polytechnic
University, Bucharest, (CE),
Romania
Email: scipub02@gmail.com

Abstract: The paper presents an original method for the determination of the yield of the gearbox, gears forces, gearbox and power. It analyzes the influence of certain parameters which affects the efficiency of the gearbox. Also an original method for the determination of the yield of the drive shafts oriented on the basis of the ratio of contact is presented the brief. The relations submitted, can be dynamic synthesis of the drive shafts oriented, in order to enhance the effectiveness of the mechanisms of mesh.

Keywords: Kinematics, Forces, Velocities, Powers, Gears, Efficiency, Geometry, Synthesis, Yield

Introduction

Mechanical Transmissions

A transmission is a mechanical device for transmitting movement from one part to another.

This element of the energy chain has for function the adaptation of the torque and of the speed between the driving member and the driven member.

The transmission of motion is one of the most common functions of the elements of general mechanics, that is to say, mechanical devices intended to replace the hand of man.

According to the mechanisms, the transmission is dimensioned according to considerations concerning: The position of a part of the mechanism; the desired movement; the force, or the couple sought; the power.

Modes and Transmission Components

Solid Contact Transmission

By pressure:

- In the case of a rotation
- Pulling by rope, rope, strap or tie rods
- By Obstacles

Transmission by chain, synchronous belt, rack only in case of avoidance of slippage:

- Gears

By adhesion:

- Wheel
- Smooth belt
- Clutch

Fluid Transmission

Pneumatic: Compressed air or any other gas,
Hydraulic system: Water, oil or any other liquid such as brake fluid.

Contactless Transmission

Using electromagnetism: Magnet, electromagnet

Transmission with Additional Functions

In some cases, the environment requires the use of specific components within the transmission: Elastic coupling when absorbing shocks

Cardan joint, Oldham seal to transmit the movement between two trees whose alignment is not always guaranteed (Mirsayar *et al.*, 2017).

Performance of a Transmission

Power Transmission Efficiency

In the case of power transmission, the objective is generally to limit losses.

The yield is then defined (I):

$$\left\{ \begin{array}{l} \eta = \frac{\text{The work output}}{\text{The work input}} = \frac{L_o}{L_i} \\ = \frac{\text{The power output}}{\text{The power input}} = \frac{P_o}{P_i} \end{array} \right. \quad \text{(I)}$$

A conventional gear has a yield greater than 95% (0.95).

Ratio of a Transmission of Rotational Motion

The transmission ratio is defined as the ratio of the velocities of the output motion to the input movement.

Most of the time, it is a proportional law that does not depend on the position of the mechanism.

It is expressed most often as a relationship on speed, but the report on travel is the same (II):

$$i_{io} = R = \frac{\text{The output rotation velocity}}{\text{The input rotation velocity}} = \frac{\omega_o}{\omega_i} \quad \text{(II)}$$

A gear is a system composed of two mechanical parts provided with teeth or threads which interpenetrate in such a way that one of these parts can drive the other in rotation or in translation.

These parts may be toothed wheels, racks or worms. The most frequent gear is composed of two toothed wheels external to each other, the smallest of which is called a pinion.

When the contact is internal, we no longer speak of a wheel but of a toothed crown.

There are many types of gears, which can be classified according to various criteria:

- Form of the toothing (we speak of profile)
- Relative position of the axes: Parallel, concurrent or arbitrary
- Inclination of the teeth (straight, helical, herringbone ...°)

When a mechanism has several gears, it is called a gear train (Mirsayar *et al.*, 2017).

Two situations must be distinguished:

The simple trains are those for which, in a given reference space, all the elements rotate about their own axis of revolution; these are the simplest to calculate.

The planetary trains or epicyclic trains are those for which, in a given reference space, certain elements rotate about axes which are not their axes of revolution.

They often pose serious problems of calculation to the students and even to some of their professors.

Other related mechanisms have similar properties to rigid toothed wheels.

These are, for example, the deformable toothed bells of the Harmonic Drive speed reducers, the toothed (and not serrated) transmission belts, still more or less incorrectly known as "synchronous belts", transmission chains, certain indexing mechanisms, etc. In Fig. 1 one can see the constructive photo of harmonic drive and in Fig. 2 its diagram.

All these mechanical elements provide a transmission of movement and force by meshing with teeth and hence by an obstacle.

In Fig. 3 may be seen several mechanisms rotary cam and cam followers.

In Fig. 4 can be observed a mechanism with an universal joint and the other one with two universal joints and the mini shaft. In Fig. 5 one can see a Geneva drive mechanism (Mechanism with cross of Malta), first one with one beginning and second one with two beginnings. In Fig. 6 one can see a differential mechanism. In Fig. 7 one may see two mechanical transmissions of space with bars. Spatial mechanical transmission, ball, the cylinders and the pistons, used to pumps and motors rotating will be seen on the Fig. 8.

Figure 9 shows some mechanical reduction in speed and Fig. 10 some manual gearboxes used in road vehicles. In Fig. 11 one can see a worm gear and in Fig. 12 some ratchets.

Figure 13 shows us a few planetary mechanisms used and in the construction of the automatic transmission (Fig. 14).

Gears are present today in all the fields of activity. They offer the advantage of working with very high efficiency (Maros, 1958; Stoica, 1977).

Irrespective of their size, gears must be compiled taking into account the conditions carefully.

The work from the front is trying to present the main conditions which must be met in order to correct the synthesis of a gear (Petrescu and Petrescu, 2002; 2003; Petrescu *et al.*, 2007; Petrescu, 2013).

The climax of the mechanisms using the toothed rollers must be sought in the Ancient Egypt, with at least a thousand years before Christ.

Drive wheel, "stimulated" for irrigation of crops and implements for the processing of cotton (Lei *et al.*, 2011; Lin *et al.*, 2011) were used here for the first time.

In the year 230 B.C., in the city of Alexandria, Egypt, have been used for wheels with more usually took with the steering rack.

Also, instruments which have been constructed and used from the most ancient times, above all for lifting heavy anchors of vessels and the wind remove arms used on the fields of battle.



Fig. 1. Constructive photo of a harmonic drive

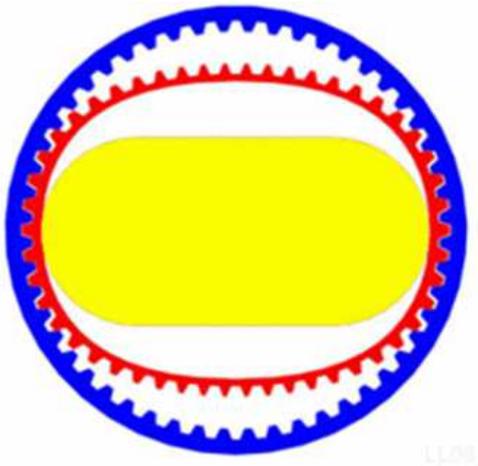


Fig. 2. Diagram of a harmonic drive



Fig. 3. Mechanisms with rotary cam and follower



Fig. 4. A mechanism with an universal joint and the other one with two universal joints and the mini shaft



Fig. 5. A Geneva drive mechanism (Mechanism with cross of Malta), first one with one beginning and second one with two beginnings



Fig. 6. A differential mechanism



Fig. 7. Two mechanical transmissions of space with bars



Fig. 8. Spatial mechanical transmission, ball, the cylinders and the pistons, used to pumps and motors rotating

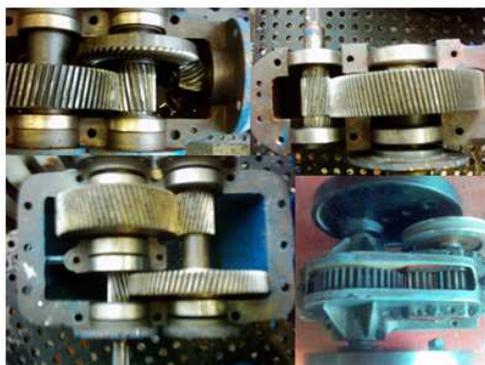


Fig. 9. Some mechanical reduction in speed



Fig. 10. Some manual gearboxes used in road vehicles



Fig. 11. Worm gear



Fig. 12. Ratchets

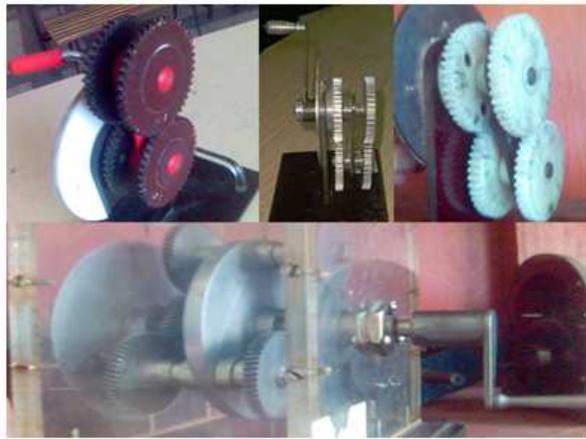


Fig. 13. Planetary mechanisms

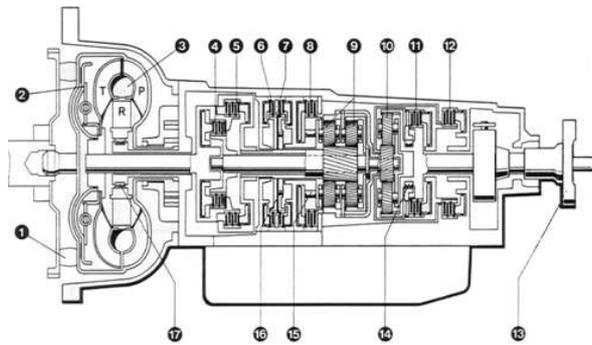


Fig. 14. An automatic transmission

Subsequently, have been introduced in the vehicles with wind and water, to reduce or increase the pump which emanates from the die by wind or water.

Antikythera is the name given to a computing device by measuring the astronomically approximately 32 up to 16x10 cm, which was discovered in 1900 in a vessel which sank just off the coast of Antikythera, an island between Crete and mainland Greece.

Several types of types of sampling point around the 80 unquestioned I for shipwreck; the appliance, manufactured from gears of bronze mounted in a case of wood, has been crushed in an accident and parts of the girls were lost, the rest being then covered with a kelp difficult to coralline deposit at the same time as and metal corroded on a core in a thin layer covered with flooring metal salts holding at the same time a large part of the former form during the almost 2,000 years, withdrawn from aside immerse.

Modern adventure began with the toothed wheel stimulated by Leonardo da Vinci, in the 15th century. He founded the moving parts and dynamic, specifying inter alia, the principle of independent movements super positions. Benz has had the engine with chain

drive gearbox with the sprocket and the gearbox (proprietary product in 1882), (Matos and Marinho, 2011; Nogueira and Real 2011; Oliveira and Lima, 2003), but the first patent from the gearbox (drawings of the first transmissions of the gearbox patented) and the wheels of the net with the chain have been completed in 1870 by British Starley and Hillman (Rey, 2013).

In 1912, in Cleveland (USA), the production of industrial wheels and specialized fishing gear drums (worm, conical flask with teeth righteous, tilt or curved) has started (Mirsayar *et al.*, 2017).

Today, the gears are present all over the world, mechanical, such as the automobile industry, electronics and equipment for electro-technical, energy industry, etc (Matos and Marinho, 2011; Nogueira and Real, 2011; Oliveira and Lima, 2003).

In today's world, more than 80-90% of the mechanical drives used are the drive shafts, the camshaft and gears. For this reason, it is necessary to be investigated and to improve constantly in these mechanisms, widely used.

Determining the Gear Efficiency as a Function of Contact Ratio

The calculation of the efficiency of a drive shafts with tools for a reduction, taking into account the fact that, at a given moment, there are several pairs of teeth in contact and not just one (Maros, 1958).

Therefore, the initial model includes four pairs of teeth in contact (4) at the same time (Pelecudi *et al.*, 1985; Petrescu and Petrescu, 2002; 2003; Petrescu *et al.*, 2007; Petrescu, 2013).

The first teeth mesh in the contact has the contact point I, defined by r_{i1} with the rays and the angle of α_{i1} pressure (Mirsayar *et al.*, 2017).

The forces which operate at this time are: Engine force F_{mi} , perpendicular to the position of the vector r_{i1} to i and force transmitted from the wheel 1 to 2 wheels through the point i , F_{ii} parallel with the way of action and with steering wheel 1 to 2 wheels.

The force transmitted is practically the projection of the force of the engine on the path of the action. defined speeds are similar to the forces (having regard to the original cinematic, or precise cinematic adopted).

The same parameters are defined for the other points of contact with the three $-j$, k and l (Fig. 15).

The quantities of interest are: r_{b1} -the base radius of the drive wheel 1; ω_1 -the circular velocity of wheel 1; z_1 -the number of teeth of the wheel 1; α -the pressure angle, so that α_1 is the pressure angle for the wheel 1 and α_0 is the normal pressure angle on the pitch circle.

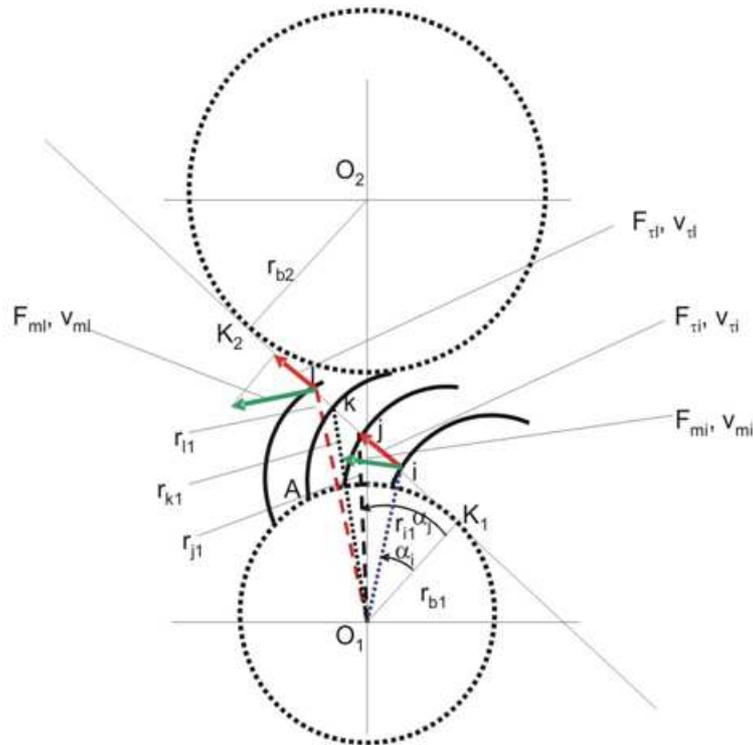


Fig. 15. Four pairs of teeth in contact concomitantly

As a starting point, one write the relations between the velocities (Petrescu and Petrescu, 2002; 2003; Petrescu *et al.*, 2007; Petrescu, 2013):

$$\begin{cases} v_{ti} = v_{mi} \cdot \cos \alpha_i = r_i \cdot \omega_1 \cdot \cos \alpha_i = r_{b1} \cdot \omega_1 \\ v_{tj} = v_{mj} \cdot \cos \alpha_j = r_j \cdot \omega_1 \cdot \cos \alpha_j = r_{b1} \cdot \omega_1 \\ v_{tk} = v_{mk} \cdot \cos \alpha_k = r_k \cdot \omega_1 \cdot \cos \alpha_k = r_{b1} \cdot \omega_1 \\ v_{tl} = v_{ml} \cdot \cos \alpha_l = r_l \cdot \omega_1 \cdot \cos \alpha_l = r_{b1} \cdot \omega_1 \end{cases} \quad (1)$$

From Equation 1, one obtains the equality of the tangential velocities (Equation 2) and, furthermore, the motor velocities are explicitly obtained (Equation 3):

$$v_{ti} = v_{tj} = v_{tk} = v_{tl} = r_{b1} \cdot \omega_1 \quad (2)$$

$$v_{mi} = \frac{r_{b1} \cdot \omega_1}{\cos \alpha_i}; v_{mj} = \frac{r_{b1} \cdot \omega_1}{\cos \alpha_j}; v_{mk} = \frac{r_{b1} \cdot \omega_1}{\cos \alpha_k}; v_{ml} = \frac{r_{b1} \cdot \omega_1}{\cos \alpha_l} \quad (3)$$

The forces transmitted concomitantly at the four points must be equal:

$$F_{ti} = F_{tj} = F_{tk} = F_{tl} = F_{\tau} \quad (4)$$

The motor forces are given as:

$$F_{mi} = \frac{F_{\tau}}{\cos \alpha_i}; F_{mj} = \frac{F_{\tau}}{\cos \alpha_j}; F_{mk} = \frac{F_{\tau}}{\cos \alpha_k}; F_{ml} = \frac{F_{\tau}}{\cos \alpha_l} \quad (5)$$

The momentary efficiency can be written in the following form:

$$\begin{aligned} \eta_i &= \frac{P_u}{P_c} = \frac{P_{\tau}}{P_m} = \frac{F_{ti} \cdot v_{ti} + F_{tj} \cdot v_{tj} + F_{tk} \cdot v_{tk} + F_{tl} \cdot v_{tl}}{F_{mi} \cdot v_{mi} + F_{mj} \cdot v_{mj} + F_{mk} \cdot v_{mk} + F_{ml} \cdot v_{ml}} \\ &= \frac{4 \cdot F_{\tau} \cdot r_{b1} \cdot \omega_1}{\frac{F_{\tau} \cdot r_{b1} \cdot \omega_1}{\cos^2 \alpha_i} + \frac{F_{\tau} \cdot r_{b1} \cdot \omega_1}{\cos^2 \alpha_j} + \frac{F_{\tau} \cdot r_{b1} \cdot \omega_1}{\cos^2 \alpha_k} + \frac{F_{\tau} \cdot r_{b1} \cdot \omega_1}{\cos^2 \alpha_l}} \\ &= \frac{4}{\frac{1}{\cos^2 \alpha_i} + \frac{1}{\cos^2 \alpha_j} + \frac{1}{\cos^2 \alpha_k} + \frac{1}{\cos^2 \alpha_l}} \\ &= \frac{4}{4 + \operatorname{tg}^2 \alpha_i + \operatorname{tg}^2 \alpha_j + \operatorname{tg}^2 \alpha_k + \operatorname{tg}^2 \alpha_l} \end{aligned} \quad (6)$$

Equation 7 and 8 are auxiliary relations:

$$\begin{cases} K_{1i} = r_{b1} \cdot \operatorname{tg} \alpha_i; K_{1j} = r_{b1} \cdot \operatorname{tg} \alpha_j; K_{1k} = r_{b1} \cdot \operatorname{tg} \alpha_k; K_{1l} = r_{b1} \cdot \operatorname{tg} \alpha_l \\ K_{1j} - K_{1i} = r_{b1} \cdot (\operatorname{tg} \alpha_j - \operatorname{tg} \alpha_i); \\ K_{1j} - K_{1i} = r_{b1} \cdot \frac{2 \cdot \pi}{z_1} \Rightarrow \operatorname{tg} \alpha_j = \operatorname{tg} \alpha_i + \frac{2 \cdot \pi}{z_1} \\ K_{1k} - K_{1i} = r_{b1} \cdot (\operatorname{tg} \alpha_k - \operatorname{tg} \alpha_i); \\ K_{1k} - K_{1i} = r_{b1} \cdot 2 \cdot \frac{2 \cdot \pi}{z_1} \Rightarrow \operatorname{tg} \alpha_k = \operatorname{tg} \alpha_i + 2 \cdot \frac{2 \cdot \pi}{z_1} \\ K_{1l} - K_{1i} = r_{b1} \cdot (\operatorname{tg} \alpha_l - \operatorname{tg} \alpha_i); \\ K_{1l} - K_{1i} = r_{b1} \cdot 3 \cdot \frac{2 \cdot \pi}{z_1} \Rightarrow \operatorname{tg} \alpha_l = \operatorname{tg} \alpha_i + 3 \cdot \frac{2 \cdot \pi}{z_1} \end{cases} \quad (7)$$

$$\begin{aligned}
 \operatorname{tg} \alpha_j &= \operatorname{tg} \alpha_i \pm \frac{2 \cdot \pi}{z_1}; \operatorname{tg} \alpha_k = \operatorname{tg} \alpha_i \\
 \pm 2 \cdot \frac{2 \cdot \pi}{z_1}; \operatorname{tg} \alpha_l &= \operatorname{tg} \alpha_i \pm 3 \cdot \frac{2 \cdot \pi}{z_1}
 \end{aligned}
 \tag{8}$$

One keeps Equation 8, with a plus sign (+) for the mechanism in the case in which the driving wheel 1 has teeth (regardless of whether it is matched external or internal), as well as with a sign (-) for the driving wheel 1 has internal teeth (drive wheel has a form of ring only for the inner drive). The relationship between the efficiency of the time (Equation 6) uses ancillary to the Equation 8 and take the form of Equation 9. In Equation 9, begin with Equation 6 in the case in which the four pairs are in contact at the

same time, but then a generalizing expression by replacing the number 4 (four pairs), via e variable, which represents the entire number of the contact ratio +1 and after the restriction of the short expressions, the variable E is replaced by the ratio of contact ε_{12} , also. The efficiency of the mechanical offers more advantages than the efficiency of the moment and will be calculated approximately, by replacing α_1 the angle of pressure in Equation 9, to the angle of the normal α_0 pressure, so Equation 10 is obtained in the case in which the ε_{12} means the ratio of contact of the drive and it will be calculated by Equation 11 to the outer drive and by Equation 12, for engagement procedure (Pelecudi *et al.*, 1985; Petrescu and Petrescu, 2002; 2003; Petrescu *et al.*, 2007; Petrescu, 2013):

$$\begin{aligned}
 \eta_i &= \frac{4}{4 + \operatorname{tg}^2 \alpha_i + \operatorname{tg}^2 \alpha_j + \operatorname{tg}^2 \alpha_k + \operatorname{tg}^2 \alpha_l} \\
 &= \frac{4}{4 + \operatorname{tg}^2 \alpha_i + (\operatorname{tg} \alpha_i \pm \frac{2\pi}{z_1})^2 + (\operatorname{tg} \alpha_i \pm 2 \cdot \frac{2\pi}{z_1})^2 + (\operatorname{tg} \alpha_i \pm 3 \cdot \frac{2\pi}{z_1})^2} \\
 &= \frac{4}{4 + 4 \cdot \operatorname{tg}^2 \alpha_i + \frac{4\pi^2}{z_1^2} \cdot (0^2 + 1^2 + 2^2 + 3^2) \pm 2 \cdot \operatorname{tg} \alpha_i \cdot \frac{2\pi}{z_1} \cdot (0 + 1 + 2 + 3)} \\
 &= \frac{1}{1 + \operatorname{tg}^2 \alpha_i + \frac{4\pi^2}{E \cdot z_1^2} \cdot \sum_{i=1}^E (i-1)^2 \pm 2 \cdot \operatorname{tg} \alpha_i \cdot \frac{2\pi}{E \cdot z_1} \cdot \sum_{i=1}^E (i-1)} \\
 &= \frac{1}{1 + \operatorname{tg}^2 \alpha_i + \frac{4\pi^2}{E \cdot z_1^2} \cdot \frac{E \cdot (E-1) \cdot (2 \cdot E - 1)}{6} \pm \frac{4\pi \cdot \operatorname{tg} \alpha_i \cdot E \cdot (E-1)}{E \cdot z_1 \cdot 2}} \\
 &= \frac{1}{1 + \operatorname{tg}^2 \alpha_i + \frac{2\pi^2 \cdot (E-1) \cdot (2E-1)}{3 \cdot z_1^2} \pm \frac{2\pi \cdot \operatorname{tg} \alpha_i \cdot (E-1)}{z_1}} \\
 \eta_i &= \frac{1}{1 + \operatorname{tg}^2 \alpha_i + \frac{2\pi^2}{3 \cdot z_1^2} \cdot (\varepsilon_{12} - 1) \cdot (2 \cdot \varepsilon_{12} - 1) \pm \frac{2\pi \cdot \operatorname{tg} \alpha_i}{z_1} \cdot (\varepsilon_{12} - 1)}
 \end{aligned}
 \tag{9}$$

$$\eta_m = \frac{1}{1 + \operatorname{tg}^2 \alpha_0 + \frac{2\pi^2}{3 \cdot z_1^2} \cdot (\varepsilon_{12} - 1) \cdot (2 \cdot \varepsilon_{12} - 1) \pm \frac{2\pi \cdot \operatorname{tg} \alpha_0}{z_1} \cdot (\varepsilon_{12} - 1)}
 \tag{10}$$

$$\varepsilon_{12}^{a.e.} = \frac{\sqrt{z_1^2 \cdot \sin^2 \alpha_0 + 4 \cdot z_1 + 4} + \sqrt{z_2^2 \cdot \sin^2 \alpha_0 + 4 \cdot z_2 + 4} - (z_1 + z_2) \cdot \sin \alpha_0}{2 \cdot \pi \cdot \cos \alpha_0}
 \tag{11}$$

$$\varepsilon_{12}^{a.i.} = \frac{\sqrt{z_e^2 \cdot \sin^2 \alpha_0 + 4 \cdot z_e + 4} - \sqrt{z_i^2 \cdot \sin^2 \alpha_0 - 4 \cdot z_i + 4} + (z_i - z_e) \cdot \sin \alpha_0}{2 \cdot \pi \cdot \cos \alpha_0}
 \tag{12}$$

Table 1. Gear efficiency for different sets of gear transmission parameters

The summarized results								
z_1	$\alpha_0 [^\circ]$	z_2	ε_{12}^{ae}	η_{12}^{ae}	η_{21}^{ae}	ε_{12}^{ai}	η_{12}^{ai}	η_{21}^{ai}
42	20	126	1.79	0.844	0.871	1.92	0.838	0.895
46	19	138	1.87	0.856	0.882	2.00	0.850	0.905
52	18	156	1.96	0.869	0.893	2.09	0.864	0.915
58	17	174	2.06	0.880	0.904	2.20	0.876	0.925
65	16	195	2.17	0.892	0.914	2.32	0.887	0.933
74	15	222	2.30	0.903	0.923	2.46	0.899	0.942
85	14	255	2.44	0.914	0.933	2.62	0.910	0.949
98	13	294	2.62	0.924	0.941	2.81	0.920	0.956
115	12	345	2.82	0.934	0.949	3.02	0.931	0.963
137	11	411	3.06	0.943	0.957	3.28	0.941	0.969
165	10	495	3.35	0.952	0.964	3.59	0.950	0.974
204	9	510	3.68	0.960	0.970	4.02	0.958	0.980
257	8	514	4.09	0.968	0.975	4.57	0.966	0.985
336	7	672	4.66	0.975	0.980	5.21	0.973	0.989
457	6	914	5.42	0.981	0.985	6.06	0.980	0.992
657	5	1314	6.49	0.986	0.989	7.26	0.986	0.994

The results of the calculations carried out for various transmission parameters are presented on the short in Table 1.

Efficiency of Helical Gears as a Function of Contact Ratio

In the world there are wheels of the helical gears, which are used very often. For helical gears, the calculations show a decrease in the efficiency of the with the tilt angle on the rise of the teeth (β). For given angle which does not exceed 25° , the efficiency of fishing gear is good enough. However, when the tilt angle is greater than 25° , speeds will suffer a significant decrease in the yield (Pelecudi *et al.*, 1985; Petrescu and Petrescu, 2002; 2003; Petrescu *et al.*, 2007; Petrescu, 2013). Calculation relationships may be given in Equation 13-15:

$$\eta_m = \frac{z_1^2 \cdot \cos^2 \beta}{z_1^2 \cdot (tg^2 \alpha_0 + \cos^2 \beta) + \frac{2}{3} \pi^2 \cdot \cos^4 \beta \cdot (\varepsilon - 1) \cdot (2\varepsilon - 1) \pm 2\pi \cdot tg \alpha_0 \cdot z_1 \cdot \cos^2 \beta \cdot (\varepsilon - 1)} \quad (13)$$

$$\varepsilon^{a.e.} = \frac{1 + tg^2 \beta}{2 \cdot \pi} \cdot \left\{ \sqrt{\left[(z_1 + 2 \cdot \cos \beta) \cdot tg \alpha_0 \right]^2 + 4 \cdot \cos^3 \beta \cdot (z_1 + \cos \beta)} + \sqrt{\left[(z_2 + 2 \cdot \cos \beta) \cdot tg \alpha_0 \right]^2 + 4 \cdot \cos^3 \beta \cdot (z_2 + \cos \beta)} - (z_1 + z_2) \cdot tg \alpha_0 \right\} \quad (14)$$

$$\varepsilon^{a.i.} = \frac{1 + tg^2 \beta}{2 \cdot \pi} \cdot \left\{ \sqrt{\left[(z_e + 2 \cdot \cos \beta) \cdot tg \alpha_0 \right]^2 + 4 \cdot \cos^3 \beta \cdot (z_e + \cos \beta)} - \sqrt{\left[(z_i - 2 \cdot \cos \beta) \cdot tg \alpha_0 \right]^2 + 4 \cdot \cos^3 \beta \cdot (z_i - \cos \beta)} - (z_e - z_i) \cdot tg \alpha_0 \right\} \quad (15)$$

Validation

All relations submitted have been validated through the use of the software package "inventor" and a very good compliance has been confirmed. More examples have been calculated for both mesh in internal and foreign affairs as well. The pairs of corresponding gearbox have pulled out automatically by the "Inventor". Figure 16 and 17 describe the pairs of gearbox, together with the main parameters of the tools to be taken into consideration for engagement external and internal, (Pelecudi *et al.*, 1985; Petrescu and Petrescu, 2002; 2003; Petrescu *et al.*, 2007; Petrescu, 2013). For the angle α_0 between 10° and 20° , line of contact is perfect. For more than 25° , the software confirms that such a design is no longer sure and for α_0 with values less than 10° , the software does not have the necessary particulars for operational, since it relies on the experimental values, which not longer exists for such low values of α_0 angle.

Discussion

The gears are today the most widespread and most frequently used mechanical transmissions, all over the world.

They must be the factory on an industrial scale, everywhere and have a variety of uses, be extremely important for both heavy machines of industrial buildings, as well as for domestic appliances, electronics, etc. meet the size of the normal excessive, big or even huge (used from ships, heavy machines or in energy), but also for watches tools, or for devices of sizes micro.

The work of his wishes to make an overview of the toolbar and then an introduction to the study of their general and a study customized for gears with fixed. The methods listed for the gears with fixed rate, can then be customized and used and the planetary gears (drive shaft with the shaft).

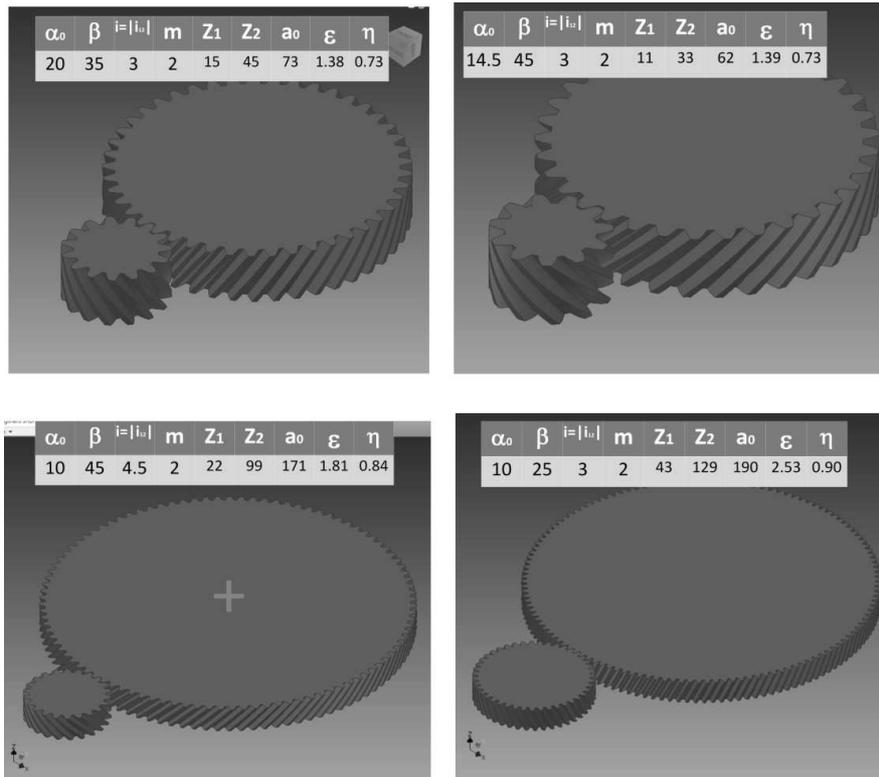


Fig. 16. Validated examples of external gearing

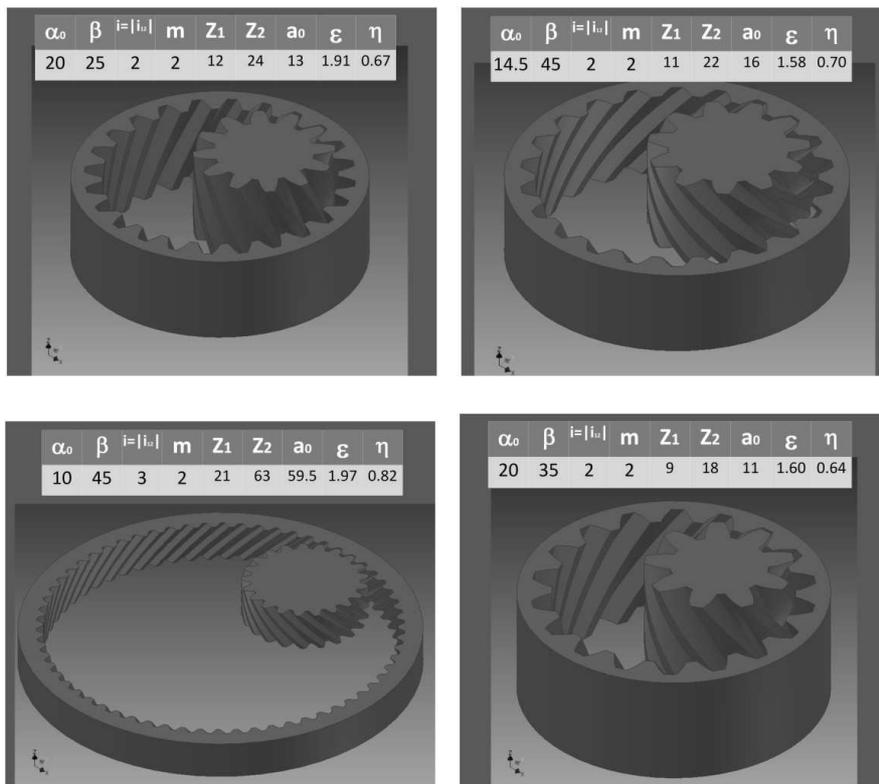


Fig. 17. Validated examples of internal gearing

The work of the original components, very much, such as the front and the geometry, Forces, automatic gearbox, powers, outputs (Tools), which form part of the actual dynamics of the mechanisms and also the most important criterion in terms of performance of a mechanism.

Gears, broke today in all the fields of activity.

They have the advantage of working with very high efficiency.

In addition, gears may transmit the heavy loads. Irrespective of their size, the tools must be synthesized taking into account the conditions carefully.

The work of the front is trying to present the main conditions which must be met in order to correct the synthesis of a tool.

In accordance with the existing standards, a drive is defined as a basic mechanism which consists of two elements gear (wheels, sectors or the toothed bar), being in rotation movement/translation absolute or relative, in which one of the components other acts by the action of the teeth which are in contact in succession and continuously.

The gears or mechanisms with gears, are practically couplers upper (in general class a fourth-C4), which are intended to transmit and or to transform the movement by reducing the speed of rotation (with increasing the moment), or by the increase of the angular speed (with a decrease in the torque) from the entrance toward the exit, by maintaining the power approximately constant (with losses very small, mechanical and friction, yields due to the large and extra large to which non-gears are).

Conclusion

The paper presents an original method for the determination of the yield of the gearbox, gears forces, gearbox and power.

It analyzes the influence of certain parameters which affects the efficiency of the gearbox.

Also an original method for the determination of the yield of the driveshafts oriented on the basis of the ratio of contact is presented the brief.

The relations submitted, can be dynamic synthesis of the driveshafts oriented, in order to enhance the effectiveness of the mechanisms of mesh.

The best efficiency is achieved with the inner drive when the drive wheel 1 is a ring.

Minimum efficiency will be obtained when the drive wheel 1 of the internal gearing has teeth.

For external drives, best efficiency is achieved when the wheel is the drive wheel.

With the decrease in the angle of the normal α_0 , pin increases the report and increase the efficiency and.

The effectiveness of the measure also increases when the number of teeth of the drive wheel 1 (z_1) increases.

Acknowledgement

The base of this paper, presented by the corresponding author (first time) in 2002, was acknowledged and appreciated by Royal British House, by her scientific adviser, courtesy of the British Embassy in Romania in spring-summer of 2002, with wishes of success for the corresponding author and indeed, the work has enjoyed great success.

I wish in this way, to address Her Majesty Queen Elizabeth II, wishes for a long life with health, many achievements and joys. God save the Queen !

Funding Information

Research contract: Contract number 36-5-4D/1986 from 24IV1985, beneficiary CNST RO (Romanian National Center for Science and Technology) Improving dynamic mechanisms.

All these matters are copyrighted! Copyrights: 394-qodGnhhtej from 17-02-2010 13:42:18; 396-qkzAdFoDBc from 17-02-2010 17:43:22; 951-cnBGHgsHGr from 26-01-2011 16:29:02; 1375-tnzjHFAqGF from 02-09-2011 15:19:23.

The cutting action depends on the process.

In the case of plastic parts, the individual parts are generally cut, but for series production they are generally molded.

The modules are standardized. There are the main values, the secondary values and the exceptional values (in parentheses and in italics).

Author's Contributions

All the authors contributed equally to prepare, develop and carry out this manuscript.

Ethics

This article is original and contains unpublished material. Authors declare that are not ethical issues and no conflict of interest that may arise after the publication of this manuscript.

References

- Lei, X.M., Y.Z. Ge, Y.C. Zhang and P. Liu, 2011. Design and analysis for high-speed gear coupling. Applied Mechan. Mater., 86: 658-661.
DOI: 10.4028/www.scientific.net/AMM.86.658
- Lin, C., Y.J. Hou, Q.L. Zeng, H. Gong and L. Nie *et al.*, 2011. The design and experiment of oval bevel gear. Applied Mechan. Mater., 86: 297-300.
DOI: 10.4028/www.scientific.net/AMM.86.297
- Maros, D., 1958. Cinematica roților dințate. Editura Tehnică, București.

- Matos, L. and B. Marinho, 2011. A comparison of the delay spread obtained with different power delay profiles denoising techniques. *Engevista*, 13: 129-133.
- Mirsayar, M.M., V.A. Joneidi, R.V.V. Petrescu, F.I.T. Petrescu and F. Berto, 2017. Extended MTSN criterion for fracture analysis of soda lime glass. *Eng. Fracture Mechan.*, 178: 50-59.
DOI: 10.1016/j.engfracmech.2017.04.018
- Nogueira, O.C. and M.V. Real, 2011. Estudo comparativo de motores diesel maritimos atraves da analise de lubrificantes usados e engehharia de confiabilidade. *Engevista*, 13: 244-254. 3
- Oliveira, M.M.P. and F.R. Lima, 2003. Analogias entre o desenho instrumental e o dedenho computacional. *Engevista*.
- Pelecudi, C.H.R., D. Maros, V. Merticaru, N. Pandrea and I. Simionescu, 1985. *Mecanisme*. Editura Didactică și Pedagogică, București.
- Petrescu, V. and I. Petrescu, 2002. Randamentul cuplei superioare de la angrenajele cu roți dințate cu axe fixe. Proceedings of the 7th National Symposium PRASIC, (PRASIC' 02), Brașov, pp: 333-338.
- Petrescu, R. and F. Petrescu, 2003. The gear synthesis with the best efficiency. Proceedings of ESFA, (ESFA' 03), Bucharest, pp: 63-70.
- Petrescu, R.V., F.I. Petrescu and N. Popescu, 2007. Determining gear efficiency. *Gear Solutions*.
- Petrescu, F.I., 2012. *Teoria mecanismelor-Curs si aplicatii* (editia a doua). 1st Edn., Create Space Publisher, USA, pp: 284.
- Rey, G.G., 2013. Influencia de la lubricacion en la eficiencia de engranajes de tornillo sinfin. *Ingenieria Mecanica*, 16: 13-21.
- Stoica, I.A., 1977. *Interferența roților dințate*. Editura DACIA, Cluj-Napoca.